

Fixing Instructions


March 2012

Version 1.2

SKYE

Art No. 77307000

NB. This product must be installed with a minimum distance of 150mm between the infra-red sensor switch and any adjacent wall or object to ensure correct operation of the sensor.

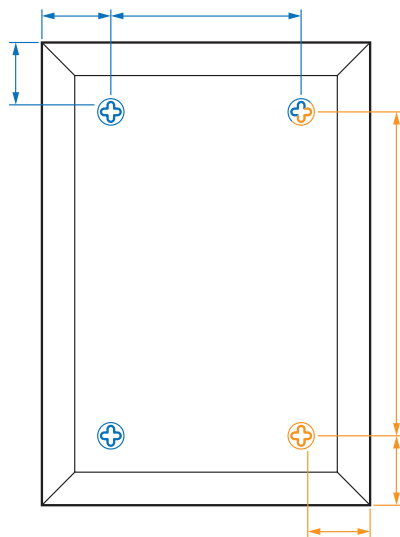


REAR VIEW
● mounting points
● alternate mounting points



This product is suitable for installation in zones: **2** **02**

All installations must comply with guidelines which are based on a zonal concept. The diagram above illustrates this concept and must be followed to ensure the safe installation of bathroom lighting. These regulations apply to domestic installations only. Installations must be made in accordance with the current IEE wiring regulations and relevant building regulations. HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician.

Wiring Diagram

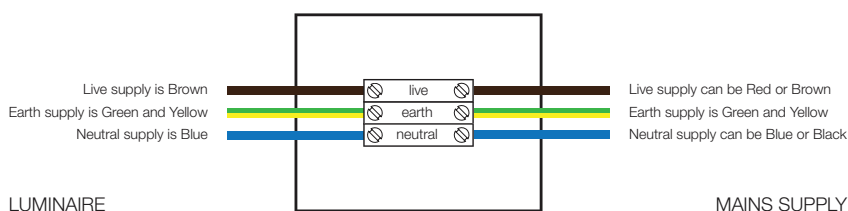

LUMINAIRE

MAINS SUPPLY



WEEE compliance - must not be mixed with general household waste

Fixing Instructions:

Thank you for purchasing this HiB product. Please read through these instructions carefully and refer back to them during installation to ensure that your product is fitted safely and that it retains its high quality finish.

Please retain this leaflet for future reference

- 1) Position the mirror in a suitable location (according to the zonal diagram below-left), ensuring that the domestic electrical mains supply is within reach of the electrical entry point of the product.
- 2) Carefully mark the position of the mirror using a soft pencil.
- 3) Remove the mirror and mark the mounting points according to the diagram on the left. This mirror can be hung portrait or landscape - only mark the positions of the appropriate mounting points. **Please ensure that all marked mounting points accurately match up with the fixing points on the mirror.**
- 4) Before drilling, ensure there are no hidden cables or pipes behind the mounting points. Using a masonry drill, drill holes in the marked positions to a suitable depth. If drilling through tile, use a ceramic drill bit.
- 5) Insert wall plugs level with the surface of the wall. If fitting to a tiled surface, wall plugs should be inserted below the tile surface to avoid cracking. *NB. For plasterboard walls, specialist fixings should be purchased, available from any DIY or hardware store.*
- 6) Insert screws into wall plugs.
- 7) **Ensure the domestic electrical mains supply to which the mirror is being connected is turned off.**
- 8) Connect the domestic mains supply to the terminal box according to the wiring diagram below-left.
- 9) Hang the mirror in position on the screws.

Bulb Replacement:



Requires T9 Round bulb, Maximum 32 Watts

CAUTION: The surface of the bulb may become extremely hot! Allow at least 30 minutes after bulb failure before replacing...

- 1) Turn off the mains electrical supply and disconnect the wiring between the mains electrics and the mirror.
- 2) Detach mirror by removing the biggest screw on the back of the frame and then sliding the mirror face away from the sensor switch towards the other side.
- 3) Carefully grasp the failed bulb and lift upwards to remove the bulb from the bulb holder.
- 4) Carefully push the replacement bulb into the bulb holder.
- 5) Ensure the heated pad cable is connected and slide the mirror back onto the frame. Insert the screw, and tighten to secure.

Operating Instructions:

- To turn illumination on or off, operate the sensor switch located at the side (portrait) or bottom (landscape) of the mirror.
- Heated Pad is only on when mirror is illuminated.

Product Care:

- Do not use abrasives or solvents when cleaning this product.
- Wipe off all water spillages as soon as possible using a soft, damp cloth.

HiB

HiB Ltd, Castle House, 21-23 Station Road, New Barnet, Herts, EN5 1PH
t. 020 8441 0352 f. 020 8441 0219 e. sales@hib.co.uk w. www.hib.co.uk

©HiB Copyright: No part of this document may be reprinted or duplicated without HiB consent. All sizes and measurements are approximate, but we do try and make sure they are as accurate as possible. In the interest of continuous product development, HiB reserves the right to alter specifications as necessary. E & OE.