

## **AFTERCARE INSTRUCTIONS**

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting, even the non-scratch cleaners. **NOTE: Never use abrasive detergents or disinfectants or those containing alcohol, hydrochloric acid or phosphoric acid.**

Bristan recommend E-Cloth for cleaning all of our bathroom & kitchen products. Using just water, E-cloth gives a smear free, deep clean by breaking up and holding dirt, which normal cloths leave behind. Order through your Bristan stockist. (ORDER CODE: E-CLOTH)



## **GUARANTEE**

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

**All products must have access for servicing or replacement during the life of the product.**

In the interests of continuous product development we reserve the right to alter specification as necessary

## **PRODUCT CODE:**

**PRODUCT IDENTIFICATION CODE LASER ETCHED ON PRODUCT**  
Installer please fill in code here \_\_\_\_\_.(Where applicable)

TELEPHONE HELPLINE! +44 (0)844 701 6273

Bristan Group Limited  
Birch Coppice Business Park  
Dordon  
Tamworth  
Staffordshire  
B78 1SG  
UK

A Masco Company  
Website: [www.bristan.com](http://www.bristan.com)  
Telephone: +44 (0) 844 701 6274  
Facsimile: +44 (0) 844 701 6275  
Email: [enquire@bristan.com](mailto:enquire@bristan.com)

# BRISTAN


## **Concealed, Bar Shower Wall Mount**

## **Fitting Instructions & Contents List**


**Please keep these instructions for future reference and request of replacement part**

## **INSTALLATION**

1. Identify all components and check for completeness, particularly before commencing installation.
2. The top diagram shows how the 3/4" BSP mounting spigots can be moved to achieve the required centres. The centres should be set up to suit the item being installed with the wall mount.
3. Fix the mounting plate to the internal wall or studding using suitable fixing (not supplied). Use a spacing batten or similar as necessary. connect the hot and cold water supplies using 15mm copper pipe with the nuts and olives (supplied). Supplies can come from above or below making sure Hot is on the left and Cold is on the right when viewed from the front.
4. Mark out the position of the spigots on the plaster board and cut two holes for the spigots to protrude through, ensuring the cover shrouds will completely mask.
5. Finish the wall and push-fit shrouds as shown. **NOTE!** A small bead of silicon sealant between the wall finish and the spigot diameter under the shroud should prevent any moisture entering the wall.
6. Fit the mixer body to the 3/4" BSP mounting spigots using the large sealing washers supplied with your fitting.
7. See back page for aftercare instructions.

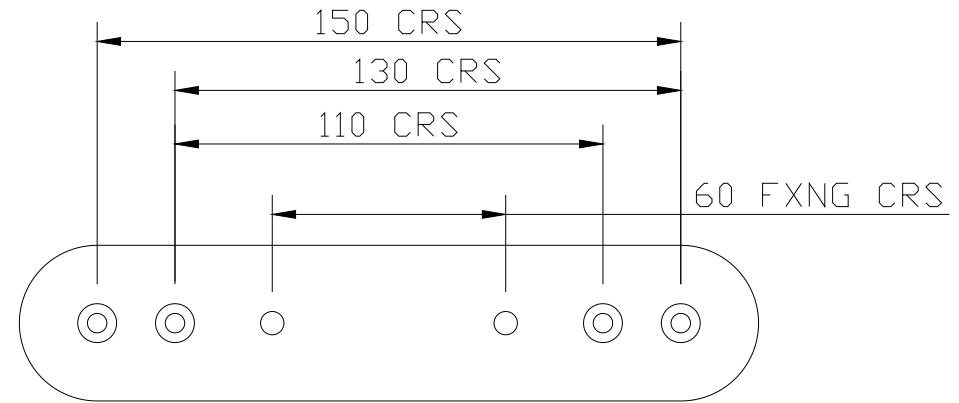

WALL PLATE

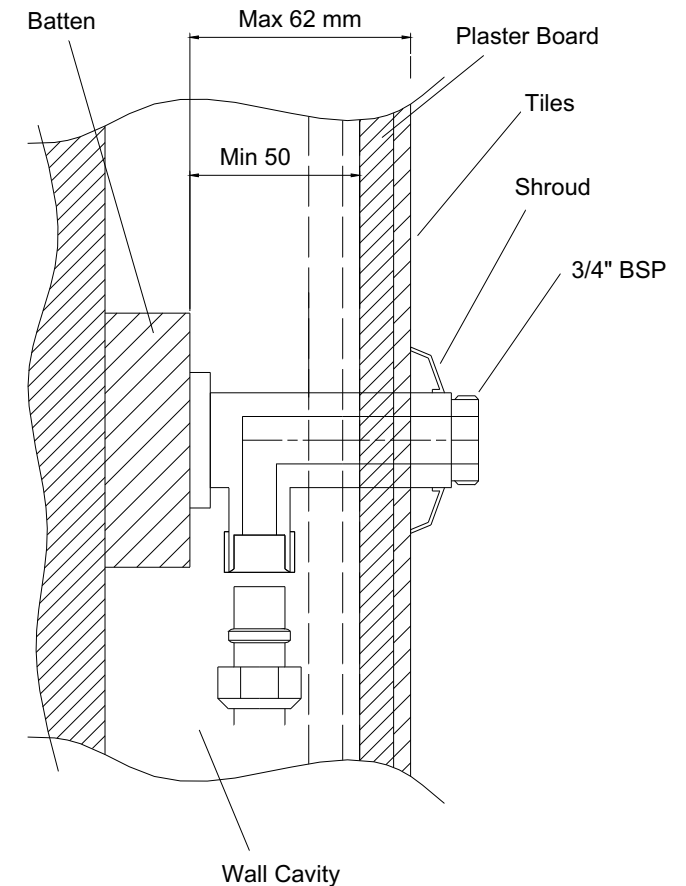

### **PLEASE NOTE:**

In the unlikely event you find a part missing, please contact our Customer Service helpline on **0844 701 6273** for immediate dispatch of part