

# Technical Datasheet

## Acumen Mirrors

**TAVISTOCK**

### Box Contents

Acumen Mirror | Fixing Kit | Instructions booklet

### FAQ

	Units	AIM050	AIM060
Can the mirror be hung landscape?	-		Yes
What is the thickness of the mirror glass?	mm		5
What size fuse should I use?	-		Seek the advice of an electrician
Where is the switch sensor located?	-	Lower Centre	Lower Right
Can the LED lighting be replaced?	-		No
Can the switch sensor be replaced?	-		Yes
How do I turn on the demister pad?	-		The demister pad will turn on when the LEDs are turned on.
Are illuminated mirrors supplied with mains cable?	-		All illuminated cabinets/mirrors are supplied with a removable 500mm mains cable.
Why are the lights not switching on?	-		Please note: After the mirror is connected to power for the first time, it may take up to 5 minutes for the sensor to calibrate and become fully responsive.

# Technical Datasheet

## Acumen Mirrors


### Electrical Specification

Product Code	Input Voltage	Lamp Type	Total Wattage (LED & Demist)	Demist (W)	Demist Size (mm)	LEDs (W)	LED (lm)	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class
AIM050	220-240V 50Hz	12V DC LED Lamp	40.1	16.5	250x300	23.6	2592	F	3000-6500	80	IP44	Class II
AIM060	220-240V 50Hz	12V DC LED Lamp	54.0	26.4	300x400	27.6	3024	F	3000-6500	80	IP44	Class II

Please note:

- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.
- The LED (lm) values represent the output of the LED. Actual product level Lumen output may vary depending on the diffuser material i.e., glass or acrylic.

AIM060

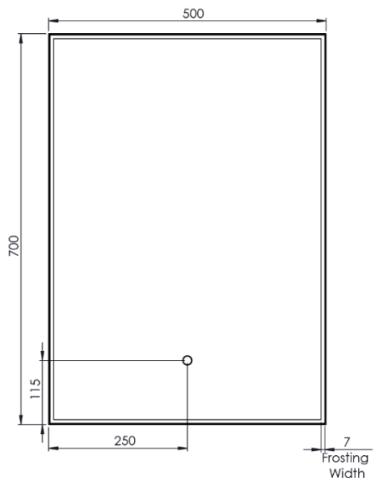

AIM060

