

INSTALLERS PLEASE NOTE THESE INSTRUCTIONS ARE TO BE LEFT WITH THE USER

2180725A August 2008

KELSEY fixed chrome shower head

INSTALLATION

Before installing the shower head, flush the pipework through to remove any debris that may be in the system.

The showerhead is a fixed head and has a single position spray pattern.

CLEANING


Triton recommends that all products are cleaned using warm, soapy water.

Do not use abrasive or aggressive chemical cleaning products as this may affect the product surface and finish and invalidate your guarantee. **Note:** The showerhead can be cleaned quickly by simply rubbing your fingers over the faceplate.

Before cleaning, turn off the unit at the mains supply to avoid the shower being accidentally switched on.

IT IS IMPORTANT TO KEEP THE SHOWERHEAD CLEAN TO MAINTAIN THE PERFORMANCE OF THE SHOWER. The hardness of the water will determine the frequency of cleaning. For example, if the shower is used every day in a very hard water area, it may be necessary to clean the showerhead on a weekly basis.

Note: The shower head is not designed to be disassembled.

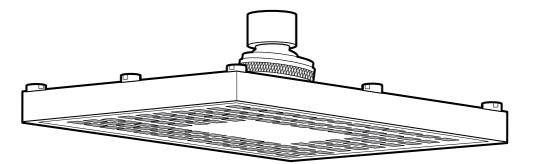

SPARES Ref. Description

Part No.

Complete assembly only 88600013

Please refer to shower installation and operating instructions for service details. E&OA.