

# MB12 Pivot Bath Screen

**IMPORTANT**


**Please read the complete instructions  
before commencing fitting.**

Do Not attempt to install the product unless you can tick all 4 boxes satisfactorily


- Check that you have the tools required
- Check the installation site is compatible with the sizes of door supplied
- Check all the enclosure components are present
- Check the installation kit is complete

The wall plugs supplied with the installation kit are for use in solid walls. Hollow or 'stud partition' walls will require alternative fixings. Please consult a hardware supplier for the correct type. It may also be necessary to consult your tiling supplier about the correct method for drilling your tiles.

**ATTENTION: TAKE EXTREME CARE WHEN HANDLING GLASS.  
WEAR PROTECTIVE EYEWEAR AND CLOTHING.  
DO NOT LEAVE THE GLASS ON HARD SURFACES AND AVOID  
CONTACT BETWEEN THE GLASS EDGES AND HARD SURFACES OR  
IMPACTS DURING THE INSTALLATION**

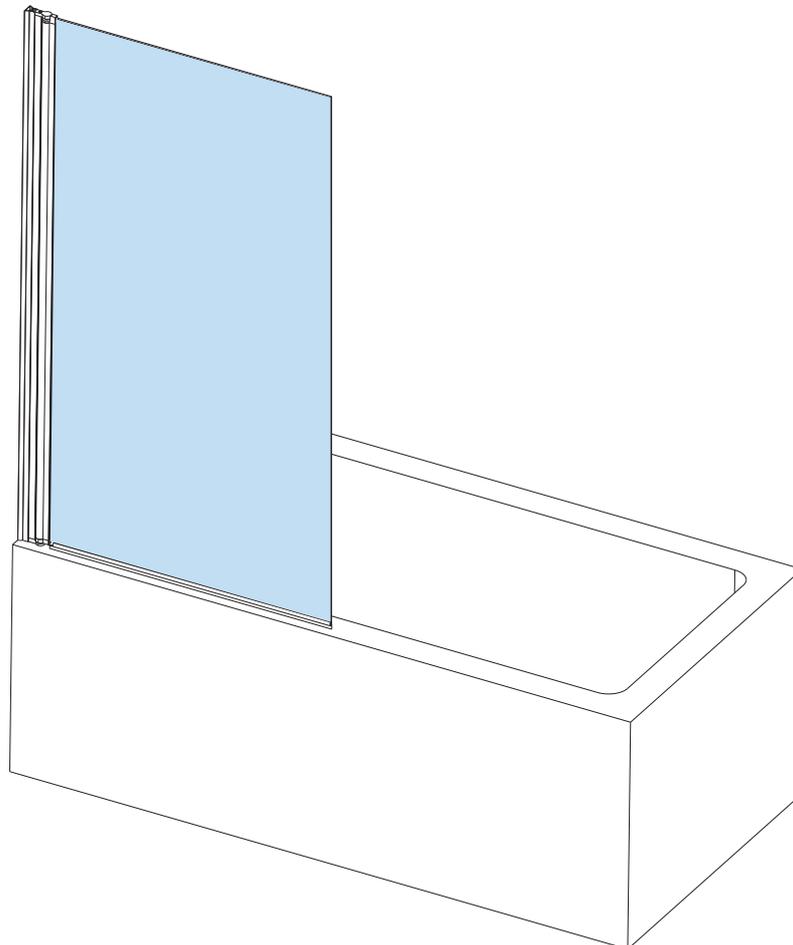

# COMPONENTS AND BOX CONTENTS

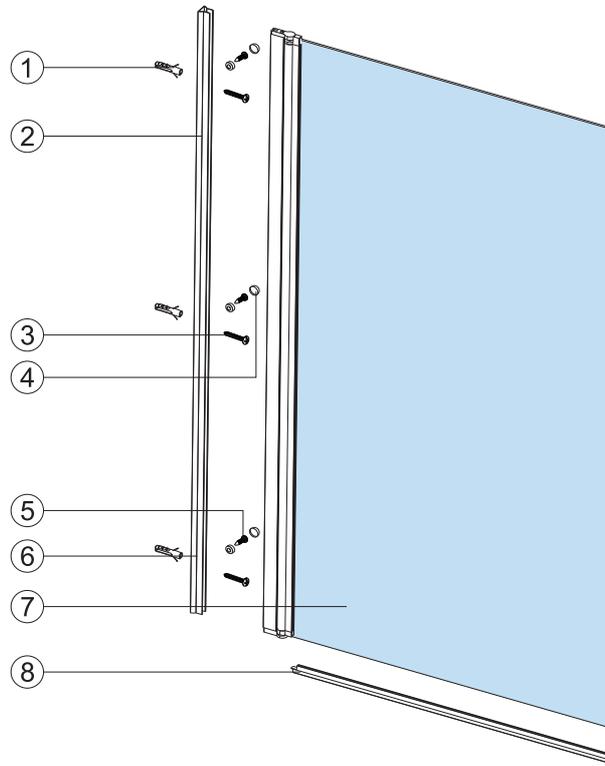

No.	Description	QTY	Part No.
1	Wall plug	3	SP0B08070
2	Wall profile	1	SP0L909C
3	Screw ST4x40	3	A2403001
4	Screw cover cap	3	SP0A308
5	Screw ST4x12	3	A2401201
6	Screw cover cap clip	3	SP0A309
7	Glass Panel	1	A
8	Bottom seal	1	SP0BSF014

## FIXING KIT COMPONENTS, TOOLS REQUIRED, SITE

### Fixing Kit components

*parts shown are not to scale*



### Tools Required

- 6mm masonry drill bit
- Spanner
- Power drill
- Quality Silicone
- Pencil
- Tape Measure
- #2 Philips Head screw driver
- Spirit level with horizontal and vertical level indicators

### IMPORTANT - Installation site



1. Ensure your bath is level before fitting. This screen is not designed to fit on baths with stepped fronts, roll top rims or integral soap dishes.
2. The tiling or other wall finishing should be effectively sealed at the tray edges.

# INSTALLATION


1. The screen is reversible for fitting to a wall on the right or left. The screen is set up for Left hand use. If you need to reverse it, unscrew one of the brackets and remove the moving panel A **Fig 1**.

NOTE: Ensure the upright seal is on the inside. **Fig 2**.

2. Turn the hinge post upside down, reinsert the moving panel (do not turn panel upside down). Reattach the bracket. **Fig 1**. The screen can then be fitted on the Right hand Side of the Bath. Ensure the upright seal is on the inside. **Fig 2**.

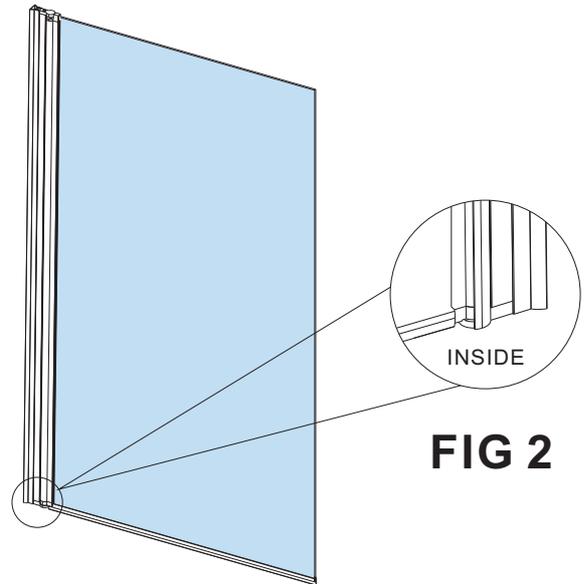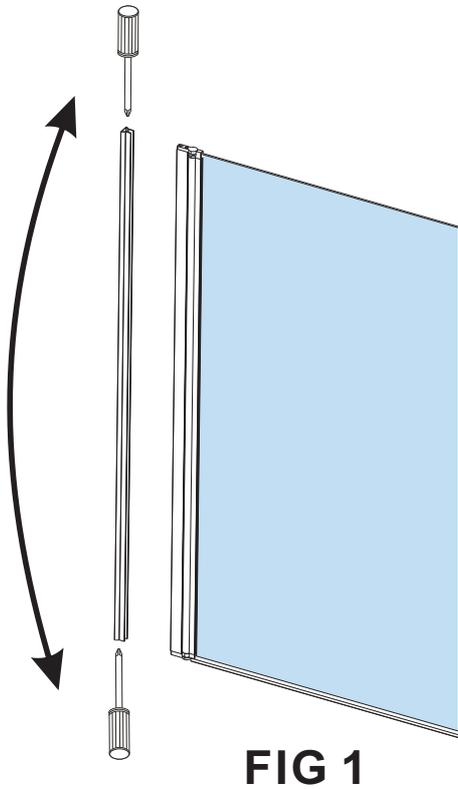


3. Position the wall profile SP0L909C so the seal on the moving panel sits on the inside edge of the bath. **Fig 3**.

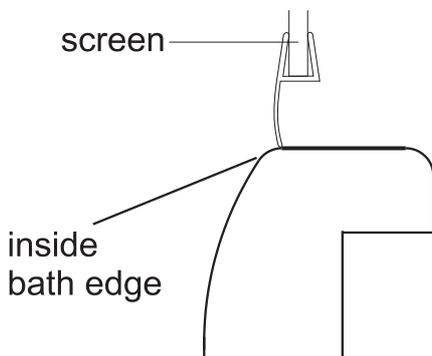


4. Plumb the wall profiles SP0L909C using the vertical element of the spirit level. Mark 3 holes, drill with 6mm masonry bit and fit wall plugs SP0B08070. Using the 3 Screw A2403001, fix wall profiles to wall. **Fig 4**.

NOTE: Only silicone the wall profile after fixing to the wall (see sealing section). Do not silicone on the back of the wall profile before fixing to the wall.

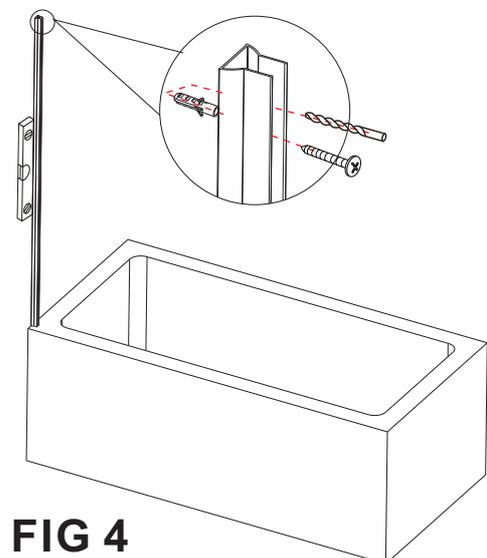


5. Silicone the bottom of the pivot part.

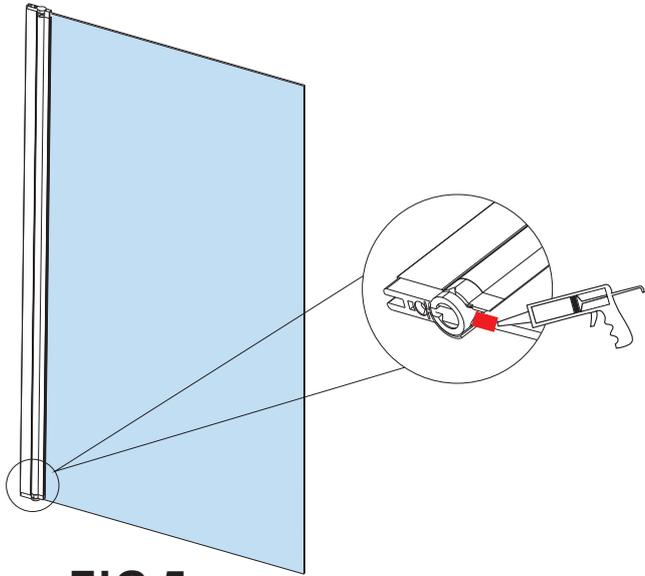

**FIG 5**


6. Insert the screen into the wall profile. Ensure the bottom seal on the moving panel A is parallel to the top surface of the bath.

Drill 3 holes through the wall profile and fixed panel using a 3mm steel drill bit. Using the Screws A2401201, screw cover caps SP0A308 and screw cover caps clips SP0A309, fix the hinge upright to the wall profile in 3 places. **Fig 6.**

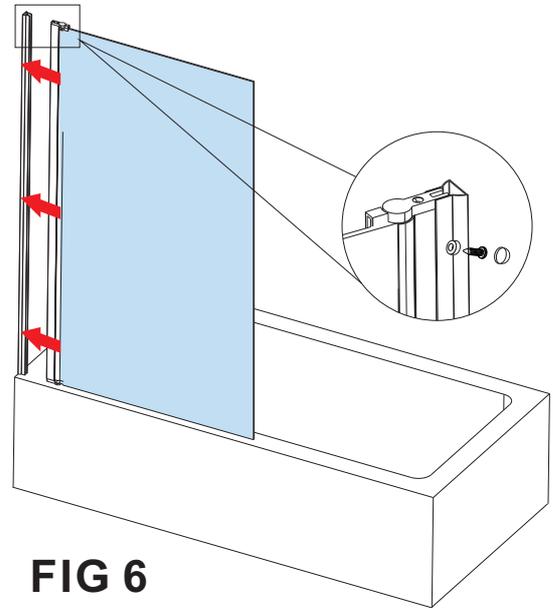

**FIG 6**


7. Insert the bottom seal into the Frame, So it sits against the bottom bracket. Ensure the fin on the bottom seal is to the inside. **FIG7.**

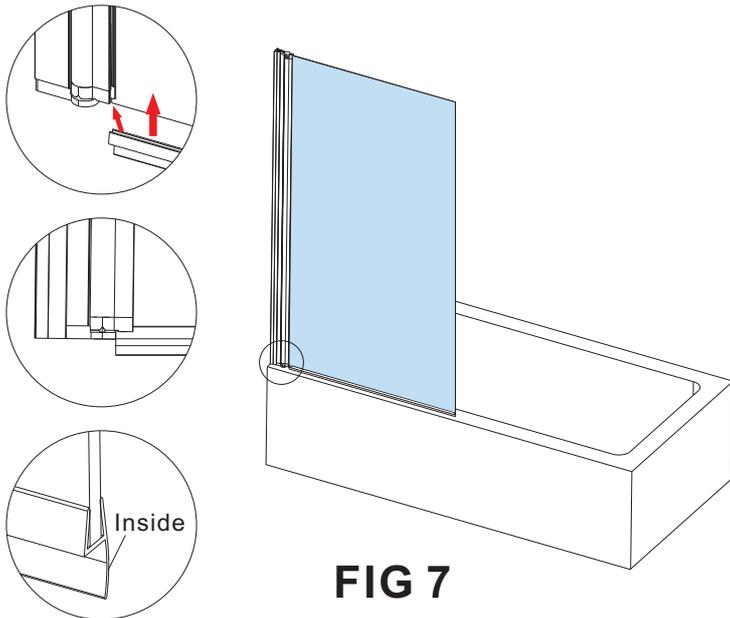

**FIG 7**

8. **Outside(dashed line):**  
When installation is complete seal the joint between the wall profile and the wall, top to bottom on the inside only. Seal with silicon, where the wall profile and fixed panel sit on the bath.

**Outside(full line)**  
From outside the screen, Seal along the bottom where the fixed panel, frame and wall profile meet the bath. Seal 50mm up where the frame meets the wall profile and where the wall profile meets the wall.

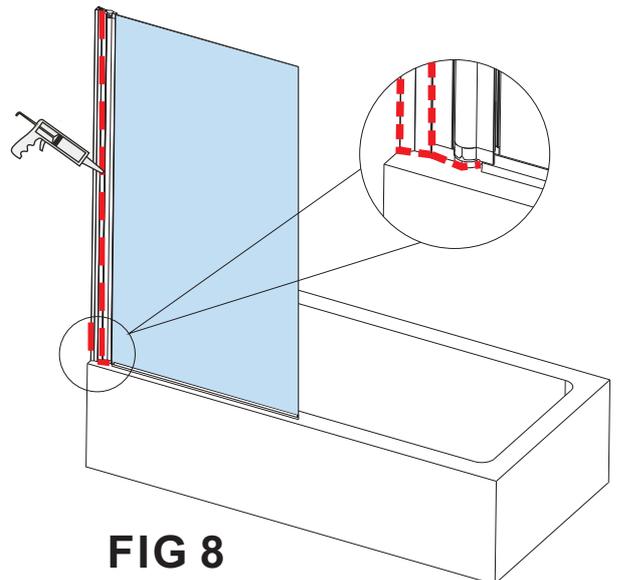

**FIG 8**



DO NOT USE THE ENCLOSURE FOR 24 HOURS AFTER SEALING