

Glastonbury Tap Range Installation Instructions and User Guide

Models covered:

TGRC00 / TGRG00 Basin Taps
TGRC01 / TGRG01 Bath Taps

TGRC02 / TGRG02 Bath Shower Mixer

TGRC07 / TGRG07 Bath Filler

Please keep this booklet for future reference.

Installer: when you have read these instructions please ensure you leave them with the user.

Contents

When you buy a Heritage product, you can be confident that it not only features a beautiful, distinctive, classic design, but that it has also been made to the very highest quality standards. To ensure that it works to its full potential, it needs to be fitted correctly.

These fitting instructions have been created to give you all of the information you need and, if you need any further help, please do not hesitate to give us a call on **0330 026 8503**.

Important Safety Information			02
General Specifications			02
Installation			03-05
	Basin/Bath Taps & Bath Filler		03
	Bath Filler		04
	Installation Guidelines		05
Maintenance			06
Troubleshooting			07
Guarantee			08-09
Notes			10



Safety Note

- Please read these instructions & retain for future use. All products manufactured & supplied by Heritage are safe, provided they are installed correctly, used correctly, and receive regular maintenance in accordance with these instructions.
- If you are in any doubt about your ability to install this product safely you must employ the services of an experienced, qualified plumber.



Before starting any installation project please consider the following:

- Prior to drilling into walls, check there are no hidden electrical wires or cables or water supply
 pipes with the aid of an electrical detector.
- If you use power tools do not forget:
 - Wear eye protection.
 - Unplug equipment after use.
- This product must not be modified in any way as this will invalidate the guarantee.
- These fittings need to be installed in accordance with and meet the requirements of the Water Supply (Water Fittings) Regulations 1999 and Scottish Byelaws 2004.

General Specifications

Operating pressure range (bar)	Min	Max
Basin Taps	0.1	5.0
Bath Taps	0.1	5.0
Bath Filler	0.1	5.0
Bath Shower Mixer	0.2	5.0

Maximum static pressure - 10.0 bar


NOTE:- Nominally equal (balanced) inlet supply pressures are recommended for optimum Performance of mixer taps.

Designed to comply with BS EN 200 for single taps / combination taps for water systems of type I and 2 general technical specifications; and to be used within systems designed to BS 6700.

BS 6700 recommends the temperature of stored water should never exceed 65°C. A stored water temperature of 60°C is considered sufficient to meet all nominal requirements and will minimise the build up of lime scale in hard water areas.




Installation - Basin & Bath Taps

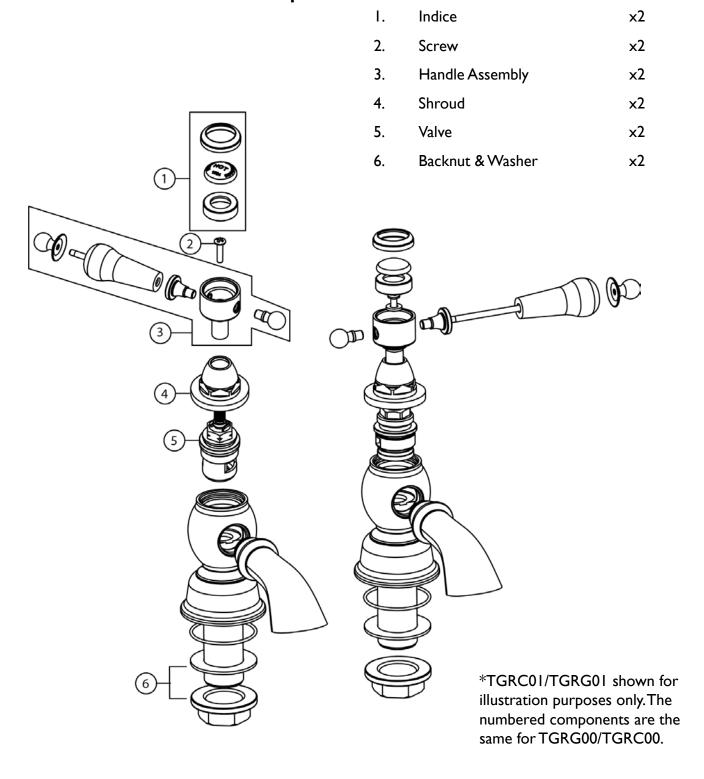



Installation - Bath Shower Mixer

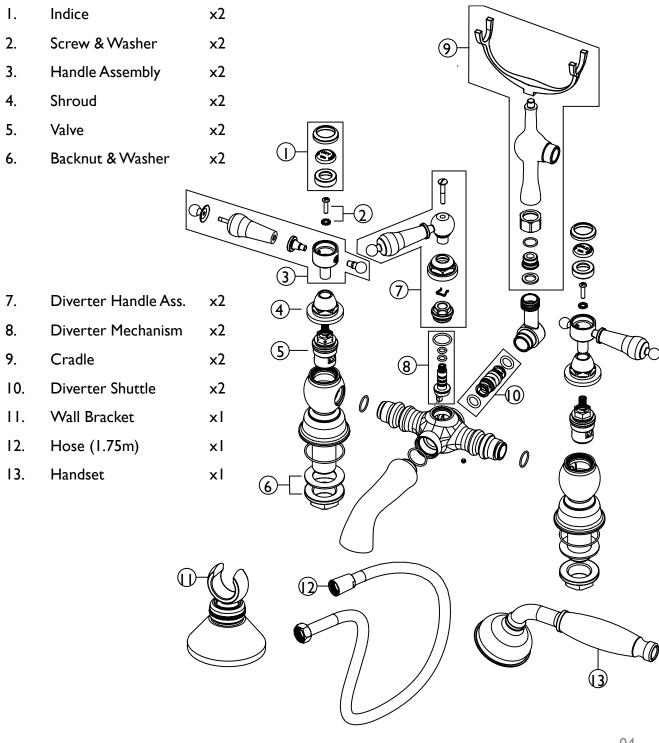

Installation

Please note that access must be left behind product for removal of diverter.

- 1. Check all components are present and correct prior to installation.
- 2. Ensuring that the O-ring is fitted into the groove on the base of the tap/s, fit the tap body onto the basin/bath.
- 3. Secure into position using the backnut and washer (6) on the underside of the basin/bath.
- 4. Connect the hot and cold water supplier using ½" or ¾" tap connectors, (Not Supplied)
- 5. Turn the handles and let the water flow for a few minutes. Check all joints and connections for leaks.

TGRC07 / TGRG07 - BATH SHOWER MIXER ONLY

- 6. With the tap in position, proceed to fit the hose (12) to the tap body and the handset (13).
- 7. Fit the wall bracket (11) to the wall using the fixings provided, ensuring that the handset and hose will reach it comfortably.
- 8. To switch from bath fill to shower mode, operate the central diverter lever (7).





Maintenance

General Cleaning

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces. All finishes will wear if not cleaned correctly. The only safe way to clean your product is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bathroom cleaning products (powders and liquids) will damage the surface of your fitting, even the non-scratch cleaners.

Note: Never use abrasive detergents or disinfectants or those containing alcohol, hydrochloric acid or phosphoric acid.

Cleaning the Valves

We advise that your fitting is regularly serviced in hard water areas to maintain optimum performance.

If your fitting begins to leak the following should be carried out;

Isolate both hot and cold water supplies to the tap by either:

• Turning the water supply off at the mains stopcock or


• Turning off the isolation valves to the tap.

I. Remove indice to reveal the concealed screw (and washer for bath filler and mixer).

- Proceed to also remove screw and washer which will free the shroud that can now be removed from the side body, allowing access to the valve.
- 3. Using a suitable spanner, remove the valve and clean the base and the seating inside the tap body.
- 4. If necessary replace the valve.

Please visit www.heritagebathrooms.com in order to find spare parts for this product.

6. Re-place the cartridge into the mixer body and re-connect handle assembly.

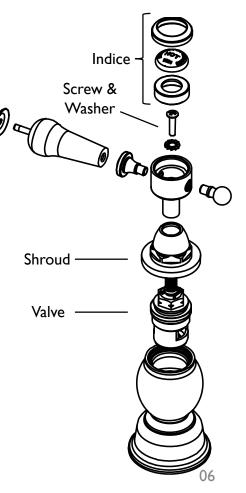

Troubleshooting

Symptom	Cause	Remedy
No flow or poor flow rate.	Partially closed stop or service valve in water supply pipework to the tap.	Open stop or service valve.
	Head of water is below the minimum distance required.	Refer to the Specification section for minimum pressures required.
	Possible airlock / blockage in supply pipework	Remove water supplies from the fitting and flush the system to remove any airlocks / debris.
	Cartridge / Valve not opening fully.	Service fitting. Refer to maintenance section on page 06.
Water dripping for a few seconds after the tap has been turned off.	This is caused by 'capillary action' and residual water in the spout being siphoned out. This should only last for a couple of seconds.	
Constant dripping / leaking when the tap is not in use.	Cartridge / Valve not fully shutting off.	Service fitting and replace cartridge / valve. Refer to maintenance section on page 06.
Fitting does not turn on.	Water supplies not turned on.	Check that the water supplies to the fitting are turned on.
	Closed stop or service valve.	Open stop or service valve.
Water does not come out of the showerhead when using the bath shower mixer.	Diverter mechanism not fully open.	Open the diverter mechanism fully.
THACE.	Insufficient water pressure / header height.	Refer to the specification section for minimum pressures required.





Heritage Bathrooms Guarantee

When you buy a Heritage product, you can be confident that it not only features distinctive design, but that it has also been made to meet our rigorous quality standards.

We offer robust guarantees and an attentive aftercare service to ensure that if you do experience any issues, we can deal with a problem quickly, and effectively.

Please note that guarantees are only valid with proof of purchase.

Our guarantees are as follows:



2 Years on Mirrors & WC Seats



5 Years on Bath Screens, Furniture, Shower Valves, Taps, Wastes & Accessories



Lifetime Guarantee on Acrylic & Cast Iron Baths And Sanitaryware

Register now for additional peace of mind

Register your product with us now and, if you do have any queries after installation, we'll be able to quickly identify the product and give you the best advice. It also means that you won't have to keep your proof of purchase to validate your guarantee. To register, simply go online at www.heritagebathrooms.com/register

Guarantee Terms and Conditions

This guarantee is in addition to your statutory and other legal rights and is subject to the following conditions:

- The product was purchased within the United Kingdom or Republic of Ireland
- The product is used in domestic applications only
- The guarantee applies solely to the original purchaser with proof of purchase
- The installation must allow ready access to all products for the purpose of inspection, maintenance or replacement
- Repair under this guarantee does not extend the original expiry date. The guarantee on any replacement parts or product ends at the original expiry date

Any part found to be defective during the guarantee period will be replaced without charge, providing that the product has been installed in accordance with the instructions given in this guide and used as the manufacturer intended. If the product is no longer available, Heritage will endeavour to provide the nearest equivalent.



Heritage Bathrooms Guarantee Cont.

The guarantee does not cover:

- Damage or defects caused by
 - General wear and tear (including special non-chrome finishes; components such as filters, seals, 'O' rings and washers)
 - Incorrect installation
 - Repair using non-Heritage parts
 - Accidental or wilful misuse
 - Corrosion and the use of inappropriate cleaning products.
 - System debris including the build-up of limescale (which can be controlled through regular servicing and maintenance)
- Compensation for loss of use of the product or consequential loss of any kind.

In the interests of continuous product improvement, Heritage reserves the right to alter product specifications without notice.

Need help?

In the unlikely event that you encounter a problem with your Heritage product, you must, in the first instance, contact the retailer you purchased it from. They will advise as to whether it is due to a manufacturing fault or an installation fault. If the problem is due to a manufacturing fault, they will contact us to arrange a supply of a replacement product as soon as possible. To speak to a Heritage customer service advisor, please contact our technical helpline on **0330 026 8503**.





Notes

Please use this space to add any notes which you or your installer may have regarding the plumbing and/or installation of this product.





Heritage Bathrooms Birch Coppice Business Park Dordon Tamworth B78 ISG

Website: www.heritagebathrooms.com

Telephone: 0330 026 8503

Email: enquire@heritagebathrooms.com

HFI (GLASTONBURY BAS/BATH) REV. D4