



ErP CE

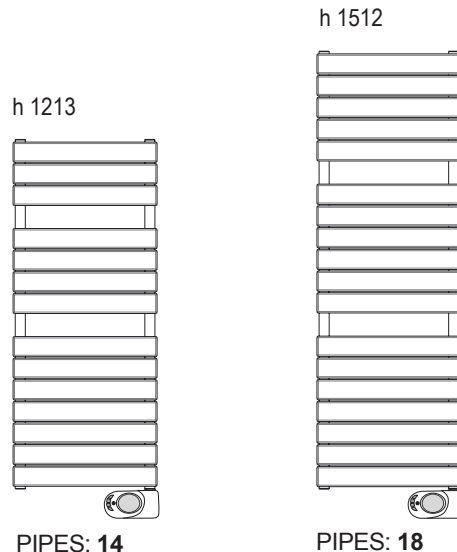


| | straight |
|------------------------------------|--|
| Material | carbon steel |
| Pipes - mm | 70x11x1,5 |
| Collectors - Ø | 35x1,5 |
| Wall fixings | 4 |
| Max surface temperature | 90 °C |
| Paint | epoxypolyester powder |
| Packaging (ECO packaging) | cardboard box and protections |
| Protection rate | IP24 |
| Electrical insulation | Class 2 |
| Heating element protection systems | Overtemperature cut/out systems |
| Wire | Wire with schuko plug; approximate lenght 1m |

Standard equipment: 1 kit wall fixing brackets

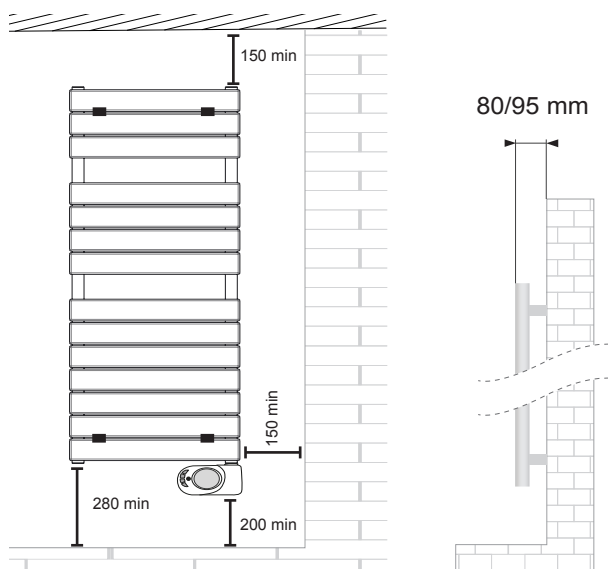

Anthracite VOV12 - straight

| code | height mm | width mm | weight kg | heating element watt | heating element kcal/h | heating element btu | overtemperature °C |
|--------|-----------|----------|-----------|----------------------|------------------------|---------------------|--------------------|
| 389051 | 1213 | 500 | 21,4 | 500 | 430 | 1706 | 105 |
| 389052 | 1512 | 500 | 26,9 | 750 | 649 | 2559 | 105 |

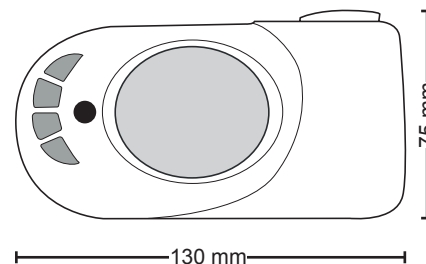

MAIN FUNCTIONS OF THE DIGITAL THERMOSTAT

