DARTMOUTH Tap Range Dartmouth BSM Chrome



|--|


E۵	.	ti	ır	es	
ı c	a	ιι	11	ರು	

- Compatible with low pressure water systems, optimised for UK market
- Quarter turn ceramic discs for smooth operation and added durability
- Available in a selection of finishes


Specification						
Product Type:	Bathroom Tap					
Main Construction Material:	Brass					
Mount Type:	Deck					
Handle Type:	Lever					
Connection Inlet:	3/4" BSP					
Connection Outlet:	MI6.5xI Aerator					
Number of Tap Holes:	2					
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/2 Turn					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.5 bar					
Maximum Dynamic Pressure (bar):	5 bar					
Maximum Hot Water Temperature °C:	65°C					
Maximum Static Pressure (bar):	I0 bar					
Flow Type:	Single					
Isolation Included:	No					

Dimensions (measurements in mm)

Product Certifications:



Additional Information:

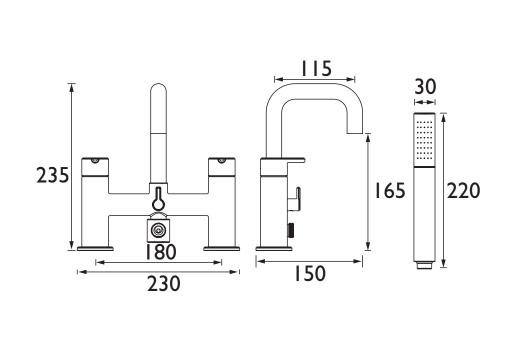

Flow Rates (I/min)								
System Pressure (bar)	0.5	I	2	3	5			
Through Bath Filler (mixed)	4.3	6.4	9.0	10.6	13.7			
Through Handset (mixed)	4.0	8.0	8.0	10.3	13.3			

TECHNICAL DATA SHEET





