

Technical Data Sheet

Index Thermostatic Concealed Dual Function Valve with Square Shower Head and Handset

TAVISTOCK

No.	Description	Code	Fixings Included
1	Index Concealed Valve	SND1610	YES




Inlet Pressure	Flow Rate (l/min)
0.5bar	8.63
1bar	12.20
2bar	17.25
3bar	18.40
4bar	24.40

Flow from valve may vary depending on accessories and domestic supply.

Dimensions - SND1610

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

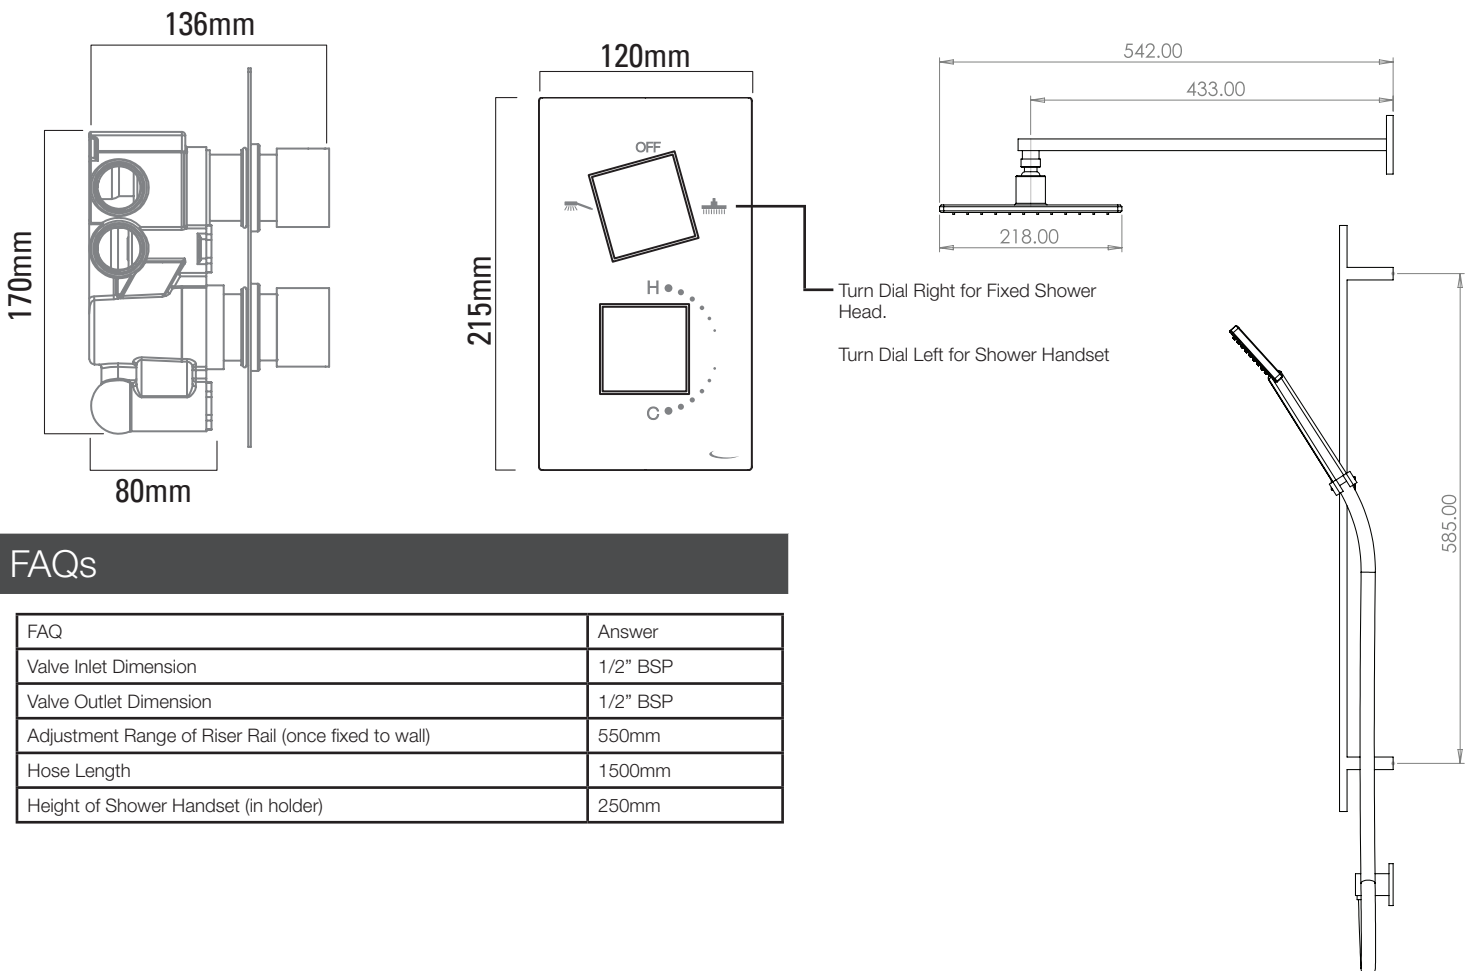

FAQs

FAQ	Answer
Valve Inlet Dimension	1/2" BSP
Valve Outlet Dimension	1/2" BSP
Adjustment Range of Riser Rail (once fixed to wall)	550mm
Hose Length	1500mm
Height of Shower Handset (in holder)	250mm