

## VICARI (SINGLE/DOUBLE) INSTALLATION GUIDE


This product must be fitted only by a fully qualified installer.



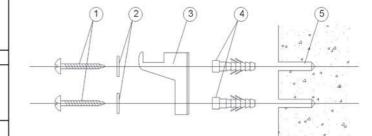


1-	SCREWS WASHERS				
2-					
3-	CLIPS (BRACKETS)				
4-	WALL ANCHORS				
5-	WALL				





NAMES	A	В	C	TUBE QTY	DA	DM	DO	н	L
VICARI (SINGLE)	600	400	545	4	25	34	65	480	162
VICARI (SINGLE)	600	600	545	6	25	34	65	480	362
VICARI (SINGLE)	600	800	545	8	25	34	65	480	362
VICARI (SINGLE)	600	1000	545	10	25	34	65	480	562
VICARI (SINGLE)	600	1200	545	12	25	34	65	480	762
VICARI (SINGLE)	600	1400	545	14	25	34	65	480	962
VICARI (SINGLE)	1800	300	1745	3	25	34	65	1680	62
VICARI (SINGLE)	1800	400	1745	4	25	34	65	1680	162
VICARI (SINGLE)	1800	500	1745	5	25	34	65	1680	262



## GENERAL RECOMMENDATION

- Before fitting the radiator it is necessary to wash out the heating system to remove any existing mud, scale, work residues, traces of flux, oil, etc.
- When the system water pH is outside the 5,5-8,5 range and/or when the dissolved is above 0,1mg/liter, it is always needed to protect the heating system components (the radiator is one of these) with a proper chemical treatment compatible with all parts in contact with water (silicon rubber too).
- In order to fit the radiator to the wall, it is necessary to choose the proper fixings for the wall material.
- If the system water exceeds 50°C, please install a warning mark near the radiator to avoid any accidental scalding.
- Clean the radiator surface only with a soft cloth to avoid scratching the finish and do not use chemical againts during cleaning operations. It is prohibited to climb onthe radiator.
- Maximum working temperature 95°C, maximum working pressure 4 bar.