



---

**Pre-installation Data Sheet**

Bathtubs and Whirltubs

## Index

---

Notes.....	2
Pre-installation .....	3
Maintenance openings .....	5
Data sheets for bathtubs and whirltubs .....	9

## Notes

---

### PLANNING

Before starting the installation, plan the layout in detail, taking the site conditions into consideration.

### TARGET READERSHIP AND QUALIFICATIONS

All work associated with the installation and water connection may only be undertaken by a plumber and all work associated with the electrical installation may only be undertaken by a licensed electrician.

### SAFETY INSTRUCTIONS

#### **Incorrect handling/transport may result in product damage.**

The metal frame and whirl system are not resilient.

- > Never hold by the metal frame or whirl system.

Improper transport can cause damage to the product and/or property damage, e.g. leaks.

- > Wear appropriate protective clothing.
- > Avoid knocks.

#### **Risk of product and/or property damage!**

The breach of local and country-specific regulations and standards can cause damage to the product and/or property damage.

- > Observe the local installation regulations and any country-specific standards at all times.

Duravit AG assumes no liability for the consequences of improper handling or improper transport.

## Pre-installation

### INSTALLATION LOCATION / INSTALLATION ROOM

> Make sure that the installation location fulfils the following criteria

<b>Doors / external access</b>	<ul style="list-style-type: none"> <li>Ensure that doors or other access openings are large enough to accommodate transport dimensions, keeping in mind the weight and need for sufficient manoeuvring room.</li> </ul>
<b>Required area</b>	<ul style="list-style-type: none"> <li>Allow for enough space around the tub for the installation.</li> </ul>
<b>Floor</b>	<ul style="list-style-type: none"> <li>Completely level.</li> <li>At a right angle to the wall.</li> <li>Note the overall strength of the floor structure including the floor finish.</li> <li>There must not be any underfloor heating under the tub.</li> <li>Install tubs <b>after</b> the tiles. (Top edge of finished floor).</li> <li>Depending on the combination of tub and whirl system it is possible that system components may protrude beyond the edge of the tub. We therefore recommend installation in a support frame.</li> <li><b>Tolerances for acrylic:</b> As a result of the manufacturing process, deviations from the nominal dimensions may occur within the limits specified in the DIN 198 standard. Please take this into account in your planning.</li> </ul>
<b>Wall</b>	<ul style="list-style-type: none"> <li>Tiled.</li> <li>At a right angle to the tub.</li> <li>Completely straight.</li> <li>Note the overall strength of the wall structure including the wall finish.</li> </ul>

### WATER INSTALLATION

#### NOTE


Bathtubs without overflow will overflow into the room.

> If a bathtub is installed without an overflow, a floor drain must be installed to protect the building against overflow water in accordance with DIN 1986-100.

#### NOTE

A pipe interrupter is absolutely essential for tubs with a base inlet (DIN EN 1717).

> Comply with assembly scheme.

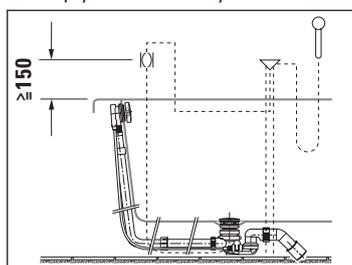

### Water connection

- Connections for the water supply and drains must be in compliance with the currently valid standards and public regulations.
- Position the water drain (DN 50) flush to the mounting surface or out of the wall directly above the mounting surface; see drawing for recommended area.

### MAINTENANCE OPENINGS AND AIR SUPPLY

#### NOTE

It is recommended to install the tub with a removable bathtub panel due to the improved maintenance options.

#### Tiling the tub

The following maintenance openings must be provided:

- Cable-driven waste and overflow 200 x 200 mm
- Units 500 x 500 mm  
(Please see the section on "Maintenance openings")
- Provide an opening in the panel for the air supply with an effective area of approx. 15 cm<sup>2</sup> (e.g. 3 x 5 cm or 2 x 7.5 cm).

#### Tub with a panel

- The panel must be removed for maintenance, and with a seamless panel, the tub must be removed from the wall. Your plans should therefore include a clearance in front of the tub.
- The air supply for the whirl system (ventilation grille/ventilation slot) must not be covered.

### ELECTRICAL INSTALLATION



**DANGER**

**Risk of fatal electric shock**

- Disconnect the power supply while working on the electrical components.
- The device must be earthed. Earthed appliances must be permanently connected to fixed wiring.
- Connect the device only to the designated electrical cable.
- NEVER touch the power supply line with wet hands.

### Pre-installation

- Lay a permanent power supply line which must be on a separate circuit.
  - The device itself does not have electrical leakage protection function. The device must be supplied through a residual current device (RCD) with a rated residual operating current not exceeding 30 mA.
  - Means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules and have a contact separation in all poles that provides full disconnection under overvoltage category III conditions outside the prescribed protection zones (0 – 2).
  - Leave 3000 mm of the supply line exposed.
- Lay an equipotential bonding cable:
  - Leave 3000 mm of cable exposed.
- Select a supply line cross-section based on the connected load on the identification plate (2.5 mm – 4 mm).
- Confirm that the grounding wire is 10 mm (3/8") longer than the L and N wire.


> Install a circuit breaker.

# 76XXXX XX X XX XXX6: 220 – 240 V AC, 60 Hz

**Fuse**  $I_N = 16 \text{ A}$

**RCD**  $I_{\Delta N} \leq 30 \text{ mA}$

## PROTECTION ZONES

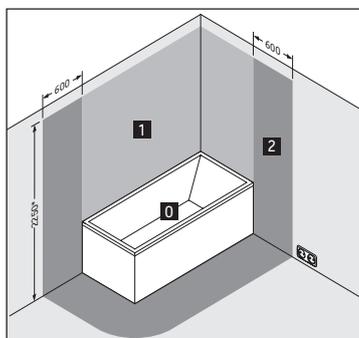

\* Or the height of the highest fixed-location shower head/water outlet, whichever is higher.

## WHITE LED LIGHT UNDER THE EDGE OF THE TUB FOR BATHTUBS

### Electrical data

#### Power supply

White LED light under the edge of the tub #791847 00 0 00 0000 #791848 00 0 00 0000 #791849 00 0 00 0000	220 – 240 V AC, 50/60 Hz, 50 W
---	-----------------------------------

**Fuse**  $I_N = 16 \text{ A}$

**RCD**  $I_{\Delta N} \leq 30 \text{ mA}$

## WHIRLTUBS

### Electrical data

Whirl system	Rated power with standard equipment	Max. rated power, fully-equipped
Air System (# 760XXX XX X AS 00XX)	0.76 kW	0.85 kW
Air System (DuraSolid) (# 760XXX XX X AS 00XX)	0.58 kW	0.58 kW
Jet Project (# 760XXX XX X JP 10XX)	0.66 kW	0.66 kW
Jet System (# 760XXX XX X JS 10XX)	0.59 kW	0.67 kW
Combi-System P (# 760XXX XX X CP 10XX)	1.89 kW	1.98 kW
Combi-System E (# 760XXX XX X CE 10XX)	1.91 kW	2.96 kW
Combi-System L (# 760XXX XX X CL 10XX)	1.59 kW	2.64 kW
Jet System E (# 760XXX XX X JE 10XX)	1.14 kW	2.20 kW

#### Power supply

# 76XXXX XX X XX XXX0: 220 – 240 V AC, 50 Hz

## Maintenance openings

### Maintenance


Install the whirltub in such a way that all of the important equipment (pump, blower and control system) remains accessible. It is recommended to install the tub with a removable furniture panel for easy maintenance.

### Location of the whirl system components


The illustrations show the standard configuration for the components of the whirl system\* with the location of the operating unit. The back massage is located at the head end (depending on the whirl system).

Custom-made designs available on request. In such cases we will require a drawing showing the desired layout. Duravit will confirm whether the desired layout can be implemented.

### Blue Moon

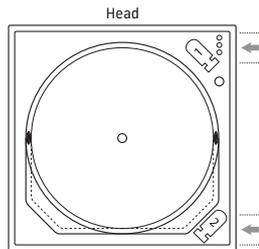


# 760143

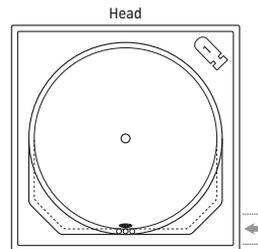


# 760402


### Cape Cod

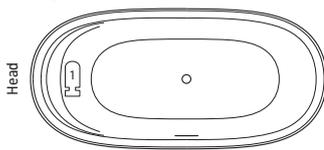


# 760330

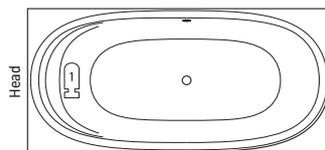

# 760362

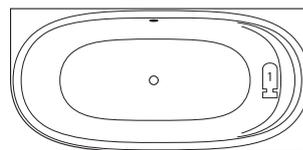


# 760363

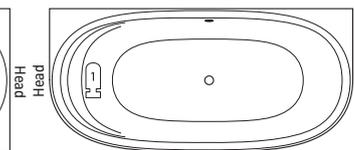


# 760364


### Darling New

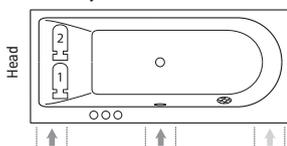


# 760242

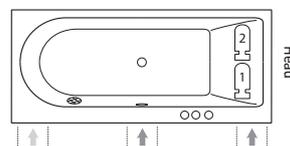


# 760243

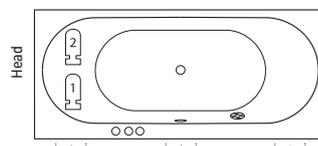


# 760244, # 760245

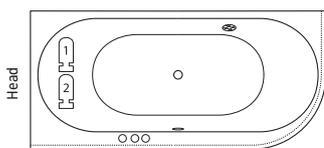

# 760246

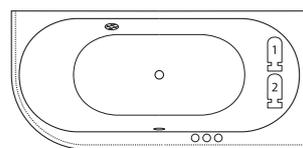


# 760247

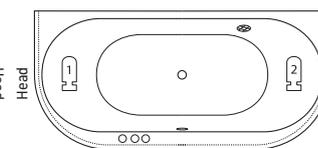


# 760248


### D-Code

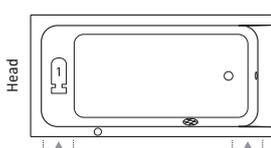


# 760095, # 760096,  
# 760098, # 760100

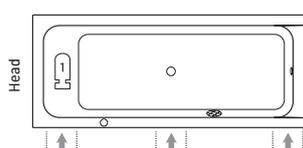


# 760097, # 760099

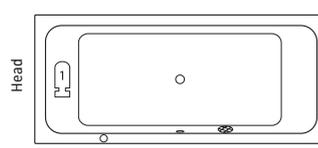

# 760101

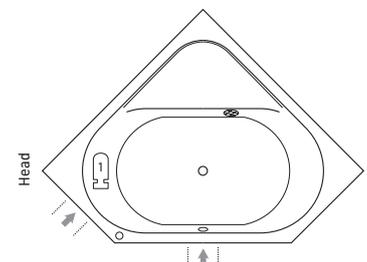


# 760137

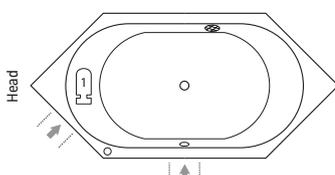


# 760138

\* Please note that depending on the combination of tub and whirl system it is possible that system components may protrude beyond the edge of the tub. We therefore recommend installation in a support frame

**D-Neo**

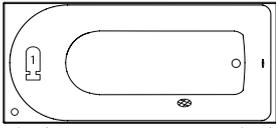


# 760471, # 760472, # 760475,  
# 760478, # 760479

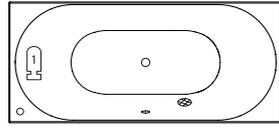


# 760476


**DuraSquare**

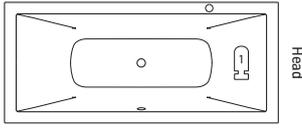


# 760426

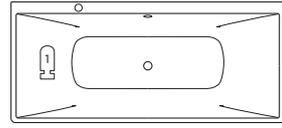

# 760427

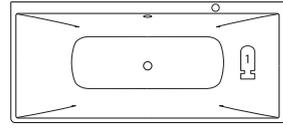


# 760428, # 760429

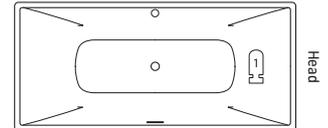


# 760430


**DuraStyle**

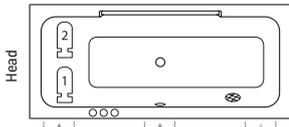

# 760292, # 760294, # 760296

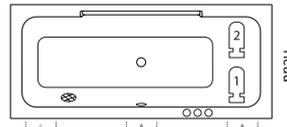


# 760293, # 760295, # 760297

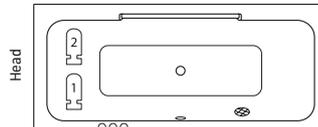


# 760298


**Happy D.2**

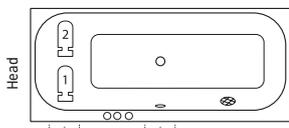


# 760308, # 760310, # 760312

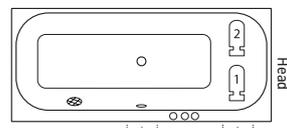

# 760309, # 760311, # 760313

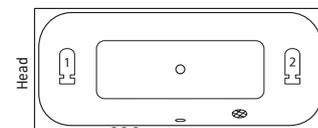


# 760314, # 760315

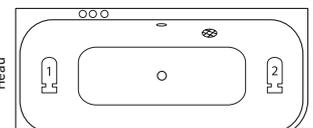


# 760316

# 760317


**Happy D.2 Plus**

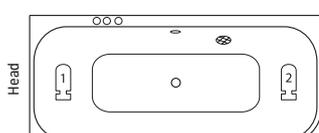


# 760449

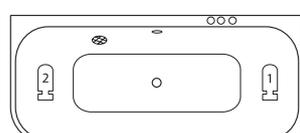

# 760450

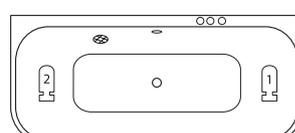


# 760451

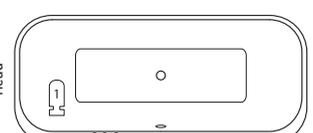


# 760453


**Luv**

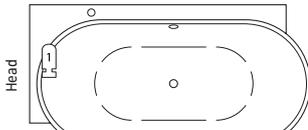

# 760431

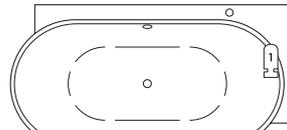


# 760432

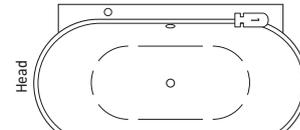


# 760433


### Paiova

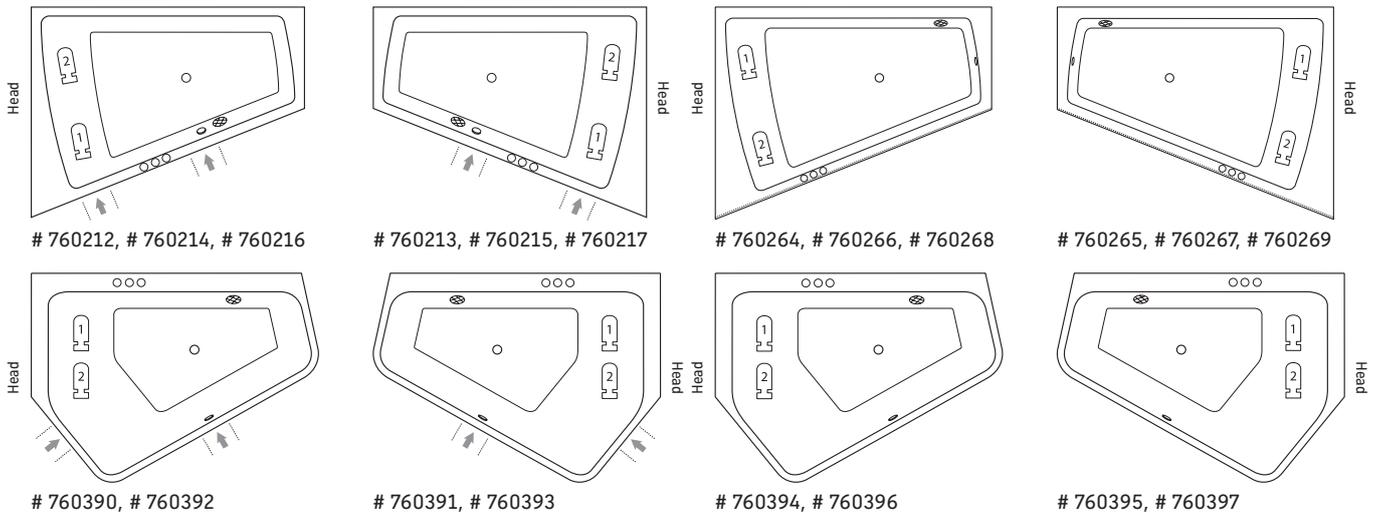


### Starck

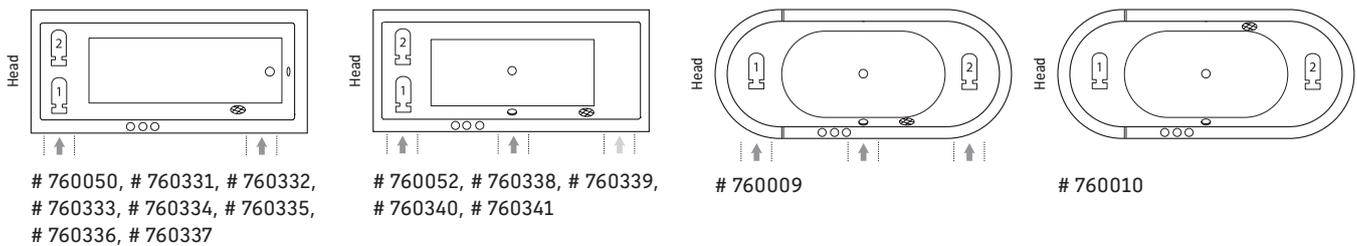


### Vero Air

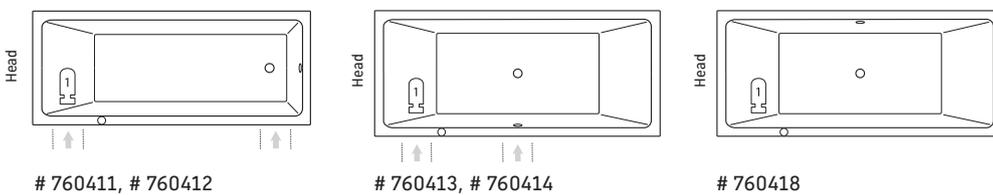

### Vero

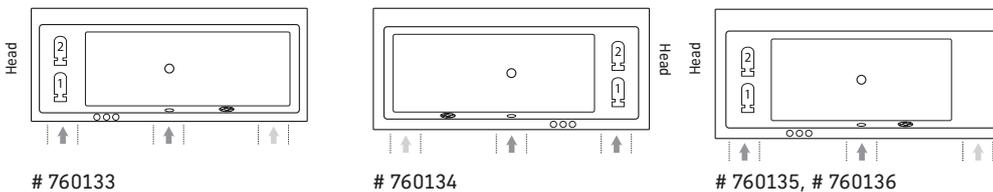

### Legend

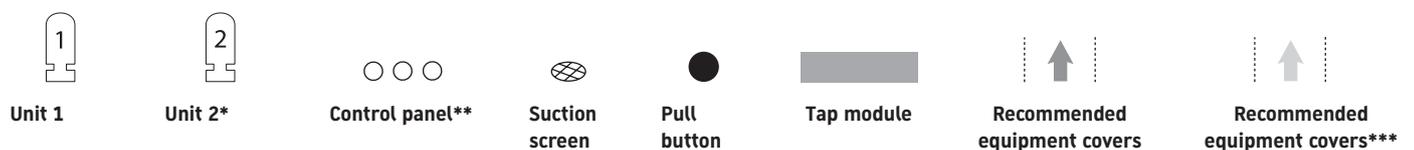

\* Only Combi-Systems / \*\* The number of operating elements is based on the whirl system and the additional modules selected / \*\*\* Only necessary for Combi-System E/L in combination with sound and/or coloured LED light




## Data sheets for bathtubs and whirltubs


# Pre-installation Happy D.2 # 700308/760308

1600 x 700 x 460


Design by sieger design

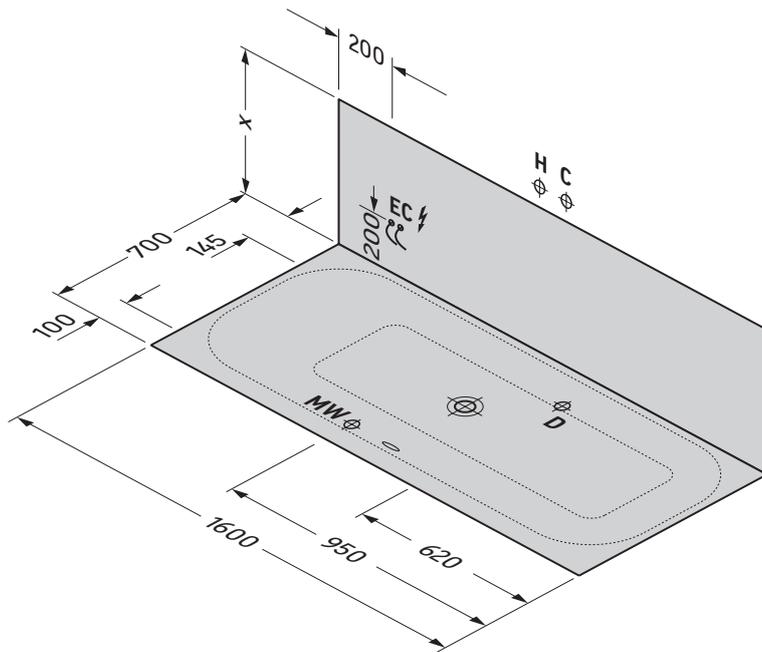

- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for waste and overflow with water inlet
- EC Electricity connection

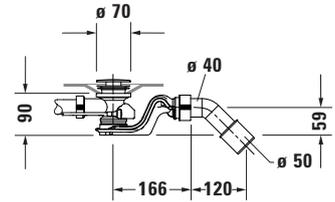

Siphon for bathtub # 700308

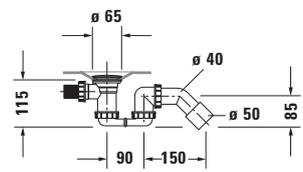

Siphon for whirltub # 760308

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


### Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
32,0	212	47,0	120 x 80 x 175	1/2"		700308 00 0 00 0000
43,0	221	85,0	206 x 109 x 86	3/4"	Air-System	760308 00 0 AS 0000
47,0	225	89,0	206 x 109 x 86	3/4"	Jet-System	760308 00 0 JS 1000
52,0	229	94,0	206 x 109 x 86	3/4"	Combi-System P	760308 00 0 CP 1000
65,0 - 72,0	241 - 247	107,0 - 114,0	206 x 109 x 86	3/4"	Combi-System E	760308 00 0 CE 1000
72,0 - 79,0	247 - 254	114,0 - 121,0	206 x 109 x 86	3/4"	Combi-System L	760308 00 0 CL 1000


# Pre-installation Happy D.2 # 700309/760309

1600 x 700 x 460


Design by sieger design

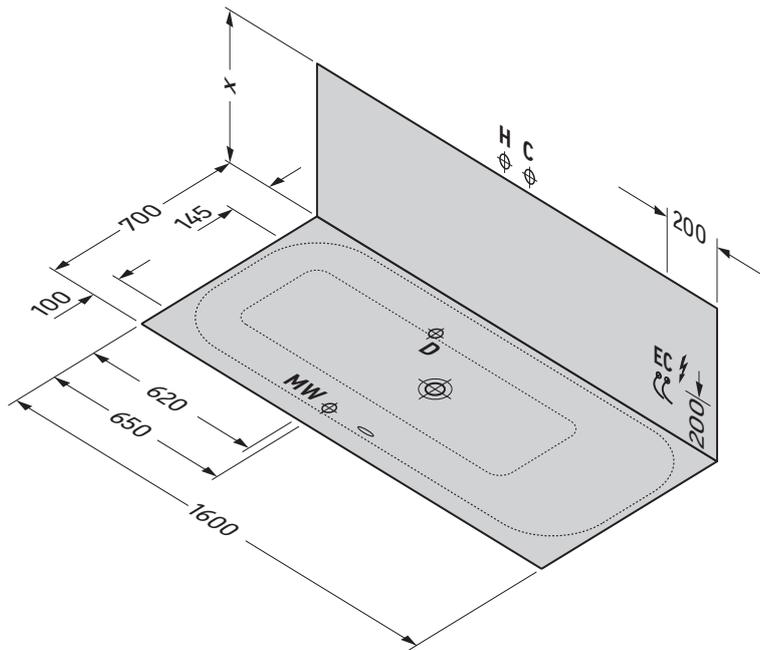

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with water inlet
- EC** Electricity connection

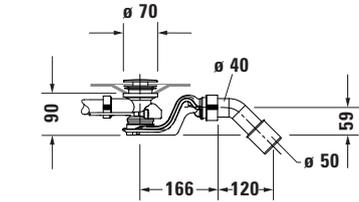

Siphon for bathtub # 700309

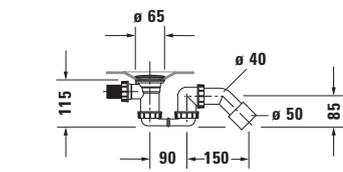

Siphon for whirltub # 760309

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-



### Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
32,0	212	47,0	120 x 80 x 175	1/2"		700309 00 0 00 0000
43,0	221	85,0	206 x 109 x 86	3/4"	Air-System	760309 00 0 AS 0000
47,0	225	89,0	206 x 109 x 86	3/4"	Jet-System	760309 00 0 JS 1000
52,0	229	94,0	206 x 109 x 86	3/4"	Combi-System P	760309 00 0 CP 1000
65,0 - 72,0	241 - 247	107,0 - 114,0	206 x 109 x 86	3/4"	Combi-System E	760309 00 0 CE 1000
72,0 - 79,0	247 - 254	114,0 - 121,0	206 x 109 x 86	3/4"	Combi-System L	760309 00 0 CL 1000


# Pre-installation Happy D.2 # 700310/760310

1700 x 700 x 460

Design by sieger design

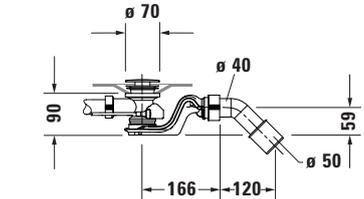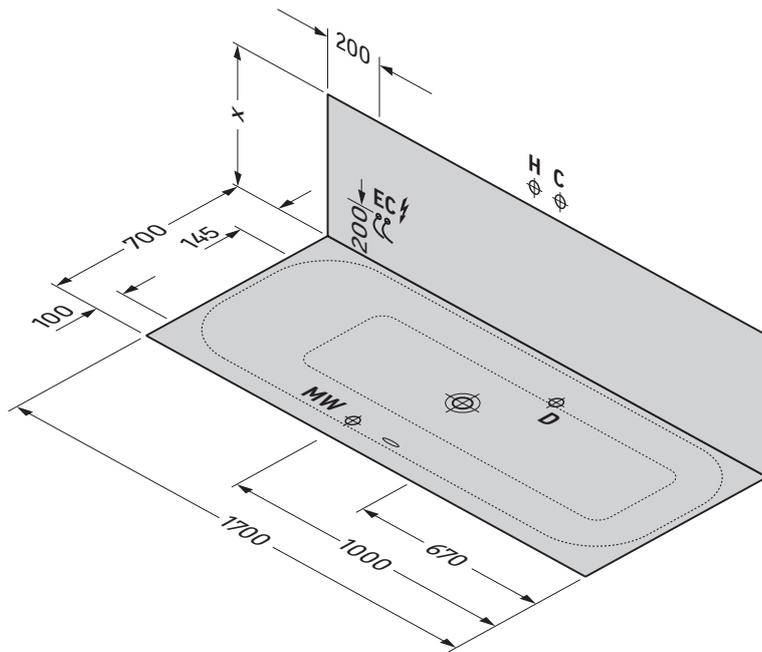

Siphon for bathtub # 700310

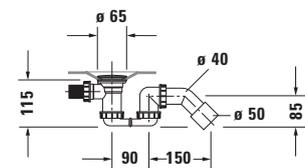

Siphon for whirltub # 760310

- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for waste and overflow with water inlet
- EC Electricity connection

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


## Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
34,0	205	49,0	120 x 80 x 185	1/2"		700310 00 0 00 0000
45,0	214	87,0	206 x 109 x 86	3/4"	Air-System	760310 00 0 AS 0000
49,0	218	91,0	206 x 109 x 86	3/4"	Jet-System	760310 00 0 JS 1000
54,0	222	96,0	206 x 109 x 86	3/4"	Combi-System P	760310 00 0 CP 1000
67,0 - 74,0	233 - 239	109,0 - 116,0	206 x 109 x 86	3/4"	Combi-System E	760310 00 0 CE 1000
74,0 - 81,0	239 - 245	116,0 - 123,0	206 x 109 x 86	3/4"	Combi-System L	760310 00 0 CL 1000


# Pre-installation Happy D.2 # 700311/760311

1700 x 700 x 460


Design by sieger design

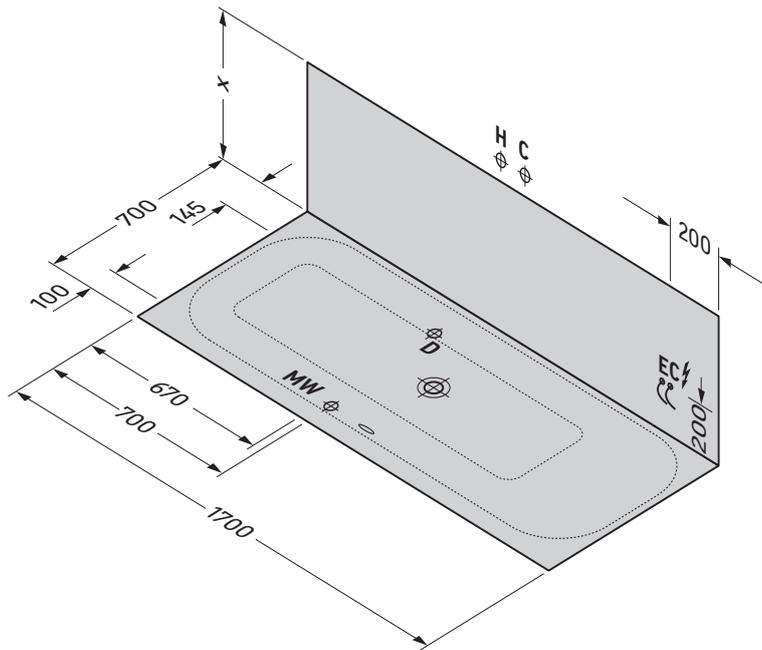

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with water inlet
- EC** Electricity connection

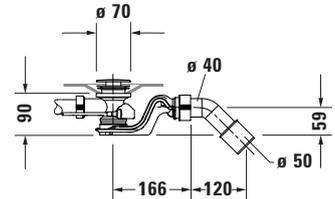

Siphon for bathtub # 700311

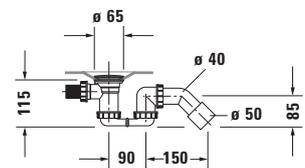

Siphon for whirltub # 760311

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


### Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
34,0	205	49,0	120 x 80 x 185	1/2"		700311 00 0 00 0000
45,0	214	87,0	206 x 109 x 86	3/4"	Air-System	760311 00 0 AS 0000
49,0	218	91,0	206 x 109 x 86	3/4"	Jet-System	760311 00 0 JS 1000
54,0	222	96,0	206 x 109 x 86	3/4"	Combi-System P	760311 00 0 CP 1000
67,0 - 74,0	233 - 239	109,0 - 116,0	206 x 109 x 86	3/4"	Combi-System E	760311 00 0 CE 1000
74,0 - 81,0	239 - 245	116,0 - 123,0	206 x 109 x 86	3/4"	Combi-System L	760311 00 0 CL 1000


# Pre-installation Happy D.2 # 700312/760312

1700 x 750 x 460


Design by sieger design

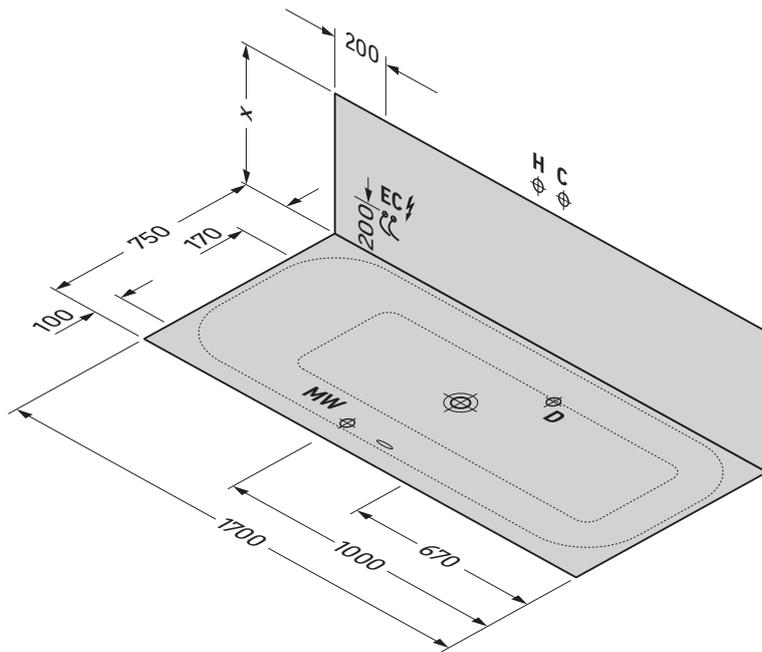

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with water inlet
- EC** Electricity connection

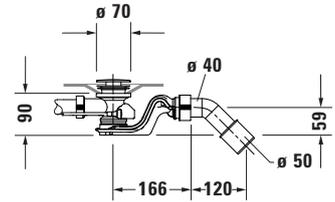

Siphon for bathtub # 700312

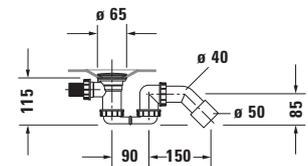

Siphon for whirltub # 760312

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


### Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
36,0	216	51,0	120 x 80 x 185	1/2"		700312 00 0 00 0000
47,0	225	89,0	206 x 109 x 86	3/4"	Air-System	760312 00 0 AS 0000
51,0	228	93,0	206 x 109 x 86	3/4"	Jet-System	760312 00 0 JS 1000
56,0	232	98,0	206 x 109 x 86	3/4"	Combi-System P	760312 00 0 CP 1000
69,0 - 76,0	242 - 248	111,0 - 118,0	206 x 109 x 86	3/4"	Combi-System E	760312 00 0 CE 1000
76,0 - 83,0	248 - 253	118,0 - 125,0	206 x 109 x 86	3/4"	Combi-System L	760312 00 0 CL 1000


# Pre-installation Happy D.2 # 700313/760313

1700 x 750 x 460


Design by sieger design

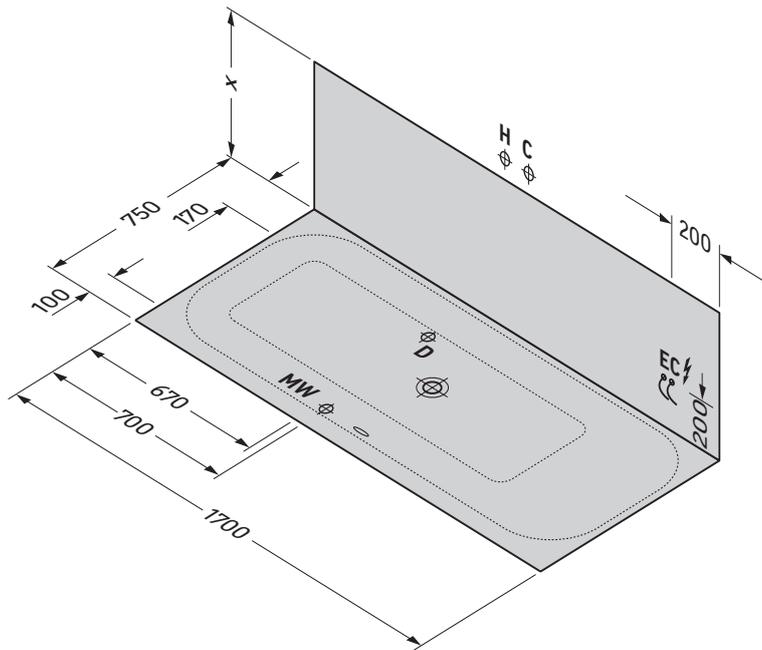

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with water inlet
- EC** Electricity connection

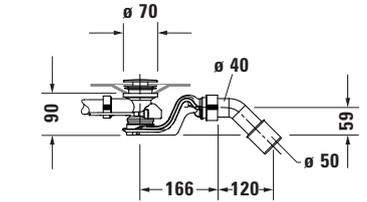

Siphon for bathtub # 700313

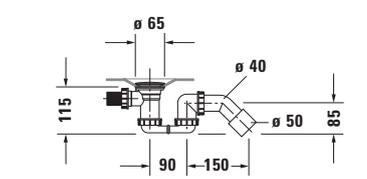

Siphon for whirltub # 760313

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


### Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
36,0	216	51,0	120 x 80 x 185	1/2"		700313 00 0 00 0000
47,0	225	89,0	206 x 109 x 86	3/4"	Air-System	760313 00 0 AS 0000
51,0	228	93,0	206 x 109 x 86	3/4"	Jet-System	760313 00 0 JS 1000
56,0	232	98,0	206 x 109 x 86	3/4"	Combi-System P	760313 00 0 CP 1000
69,0 - 76,0	242 - 248	111,0 - 118,0	206 x 109 x 86	3/4"	Combi-System E	760313 00 0 CE 1000
76,0 - 83,0	248 - 253	118,0 - 125,0	206 x 109 x 86	3/4"	Combi-System L	760313 00 0 CL 1000


# Pre-installation Happy D.2 # 700314/760314

1800 x 800 x 460


Design by sieger design

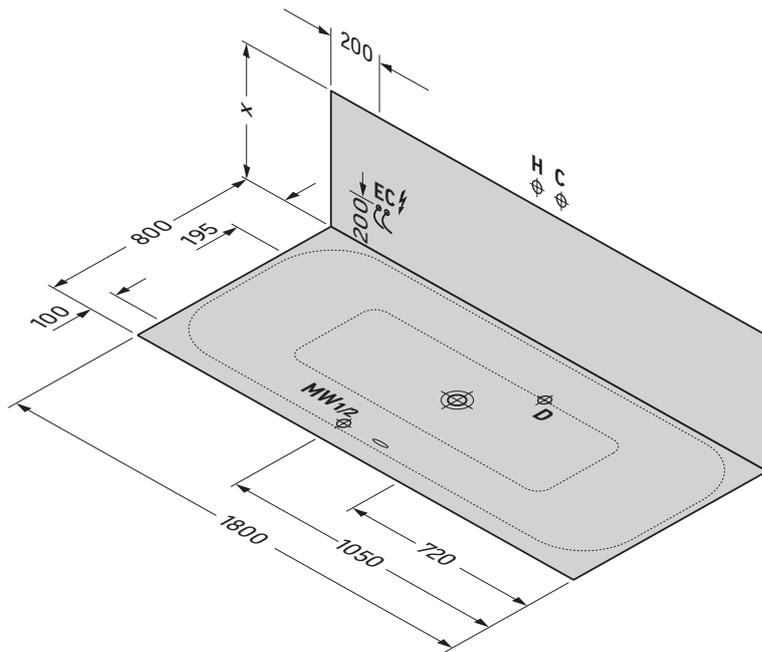


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection

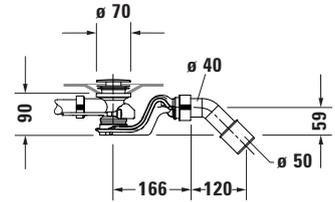


Siphon for bathtub # 700314

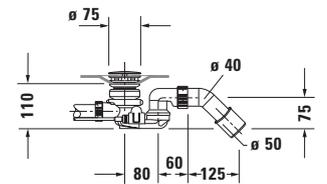

Siphon with base inlet for bathtub # 700314

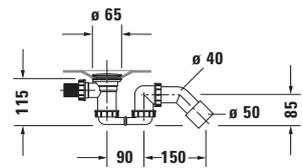

Siphon for whirltub # 760314

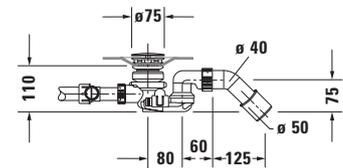

Siphon with base inlet for whirltub # 760314

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


### Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, Base inlet OD	Whirlsystem	Model-No.
39,0	194	54,0	120 x 80 x 195	1/2", 3/4"		700314 00 0 00 0000
50,0	201	92,0	206 x 109 x 86	3/4", 3/4"	Air-System	760314 00 0 AS 0000
54,0	204	96,0	206 x 109 x 86	3/4", 3/4"	Jet-System	760314 00 0 JS 1000
59,0	208	101,0	206 x 109 x 86	3/4", 3/4"	Combi-System P	760314 00 0 CP 1000
72,0 - 79,0	217 - 222	114,0 - 121,0	206 x 109 x 86	3/4", 3/4"	Combi-System E	760314 00 0 CE 1000
79,0 - 86,0	222 - 226	121,0 - 128,0	206 x 109 x 86	3/4", 3/4"	Combi-System L	760314 00 0 CL 1000


# Pre-installation Happy D.2 # 700315/760315

1900 x 900 x 460


Design by sieger design

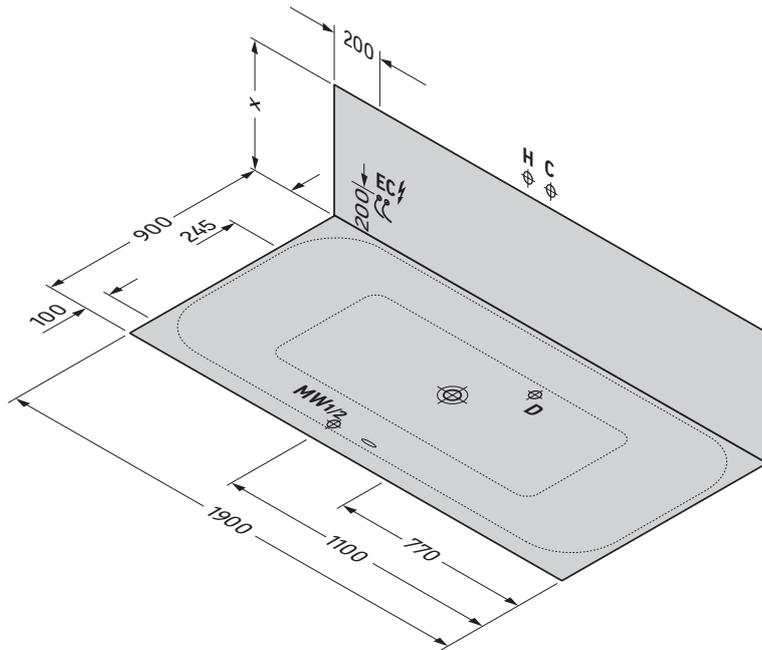


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection

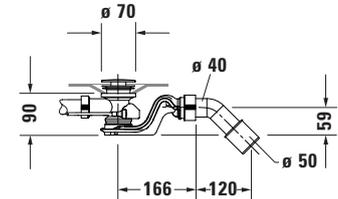


Siphon for bathtub # 700315

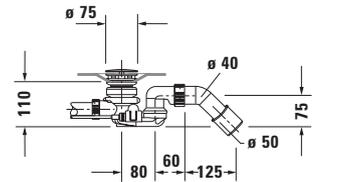

Siphon with base inlet for bathtub # 700315

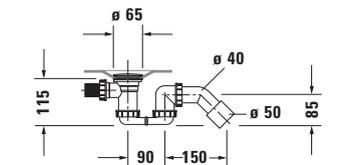

Siphon for whirltub # 760315

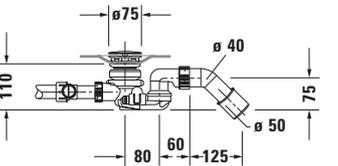

Siphon with base inlet for whirltub # 760315

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


### Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, Base inlet OD	Whirlsystem	Model-No.
41,0	195	56,0	120 x 80 x 205	1/2", 3/4"	Air-System	700315 00 0 00 0000
52,0	203	94,0	206 x 109 x 86	3/4", 3/4"	Jet-System	760315 00 0 AS 0000
56,0	206	98,0	206 x 109 x 86	3/4", 3/4"	Combi-System P	760315 00 0 JS 1000
61,0	209	103,0	206 x 109 x 86	3/4", 3/4"	Combi-System E	760315 00 0 CP 1000
74,0 - 81,0	218 - 223	116,0 - 123,0	206 x 109 x 86	3/4", 3/4"	Combi-System L	760315 00 0 CE 1000
81,0 - 88,0	223 - 228	123,0 - 130,0	206 x 109 x 86	3/4", 3/4"		760315 00 0 CL 1000


# Pre-installation Happy D.2 # 700316/760316

1800 x 800 x 460


Design by sieger design

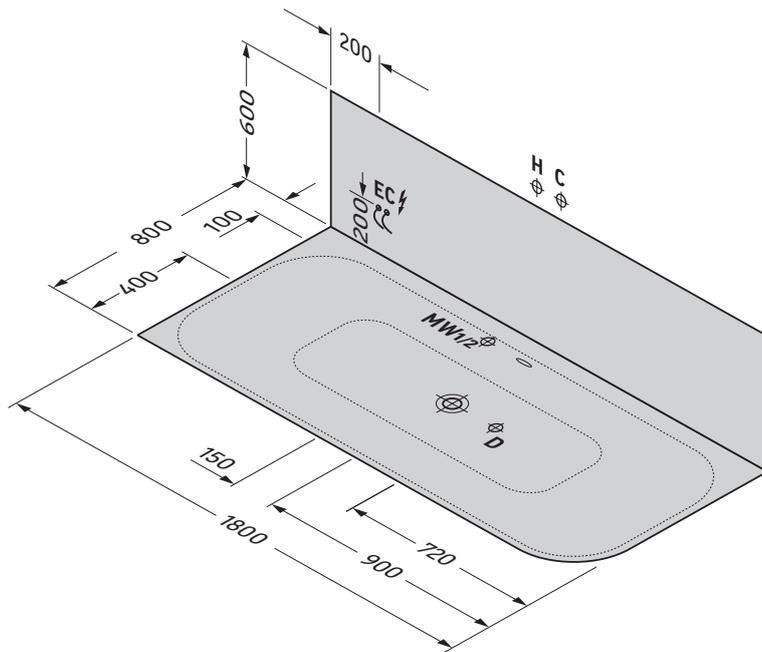


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection

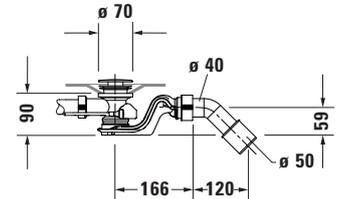


Siphon for bathtub # 700316

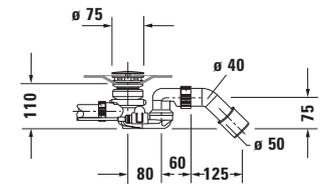

Siphon with base inlet for bathtub # 700316

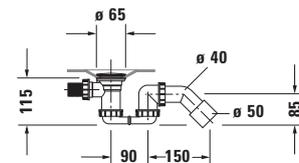

Siphon for whirltub # 760316

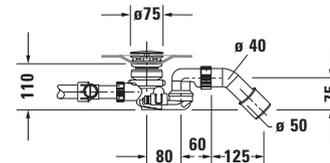

Siphon with base inlet for whirltub # 760316


## Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions (l x w x h (cm))	Water inlet OD, Base inlet OD	Whirlsystem	Model-No.
64,0	211	88,0	187 x 87 x 78	1/2", 3/4"		700316 00 0 00 0000
71,0	216	113,0	206 x 109 x 86	3/4", 3/4"	Air-System	760316 00 0 AS 0000
74,0	218	116,0	206 x 109 x 86	3/4", 3/4"	Jet-System	760316 00 0 JS 1000
80,0	222	122,0	206 x 109 x 86	3/4", 3/4"	Combi-System P	760316 00 0 CP 1000
93,0 - 100,0	231 - 236	135,0 - 142,0	206 x 109 x 86	3/4", 3/4"	Combi-System E	760316 00 0 CE 1000
100,0 - 107,0	236 - 241	142,0 - 149,0	206 x 109 x 86	3/4", 3/4"	Combi-System L	760316 00 0 CL 1000


# Pre-installation Happy D.2 # 700317/760317

1800 x 800 x 460


Design by sieger design

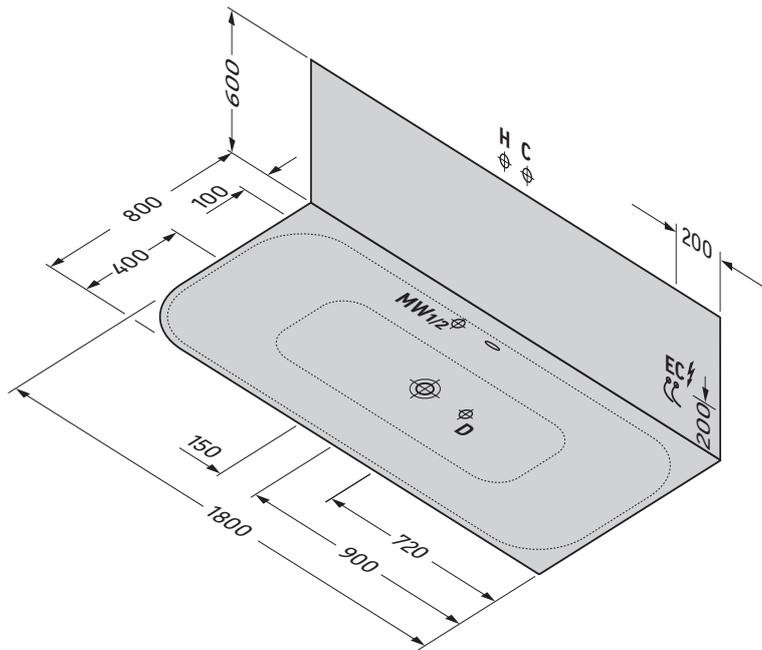


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection

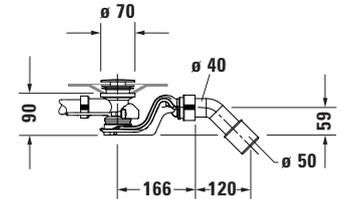


Siphon for bathtub # 700317

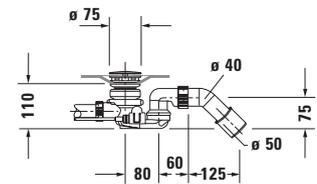

Siphon with base inlet for bathtub # 700317

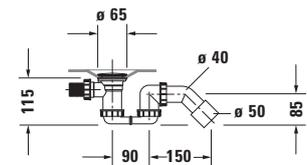

Siphon for whirltub # 760317

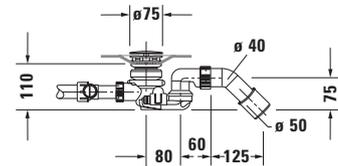

Siphon with base inlet for whirltub # 760317


## Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions (l x w x h (cm))	Water inlet OD, Base inlet OD	Whirlsystem	Model-No.
64,0	211	88,0	187 x 87 x 78	1/2", 3/4"		700317 00 0 00 0000
71,0	216	113,0	206 x 109 x 86	3/4", 3/4"	Air-System	760317 00 0 AS 0000
74,0	218	116,0	206 x 109 x 86	3/4", 3/4"	Jet-System	760317 00 0 JS 1000
80,0	222	122,0	206 x 109 x 86	3/4", 3/4"	Combi-System P	760317 00 0 CP 1000
93,0 - 100,0	231 - 236	135,0 - 142,0	206 x 109 x 86	3/4", 3/4"	Combi-System E	760317 00 0 CE 1000
100,0 - 107,0	236 - 241	142,0 - 149,0	206 x 109 x 86	3/4", 3/4"	Combi-System L	760317 00 0 CL 1000


# Pre-installation Happy D.2 # 700318/760318

1800 x 800 x 460


Design by sieger design

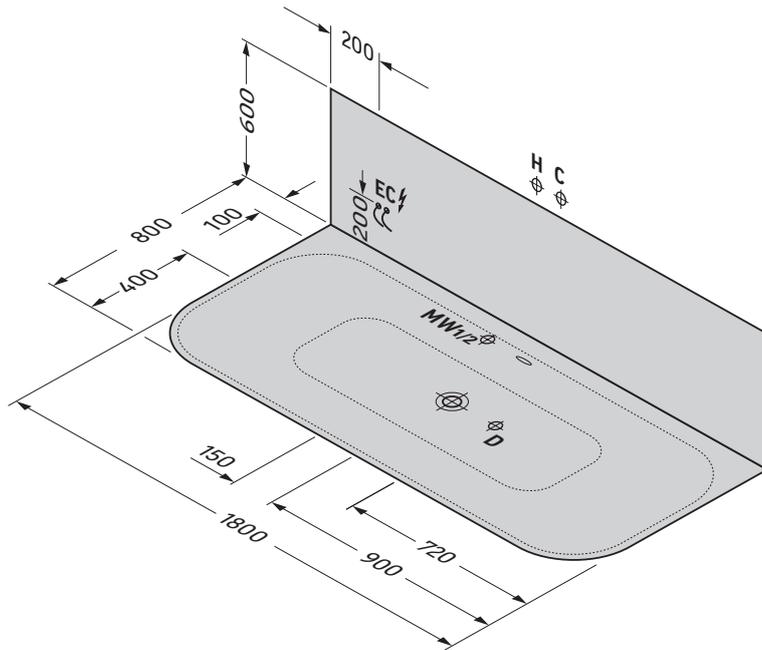


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection

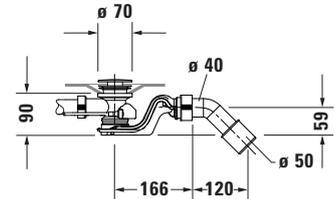


Siphon for bathtub # 700318

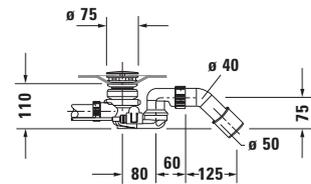

Siphon with base inlet for bathtub # 700318

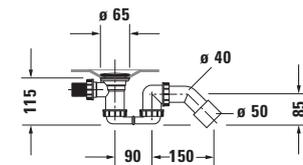

Siphon for whirltub # 760318

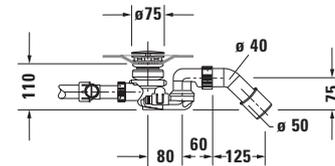

Siphon with base inlet for whirltub # 760318

## Technical specifications

Net weight kg	Floor load kg/m <sup>2</sup>	Shipping weight kg	Shipping dimensions (l x w x h (cm))	Water inlet OD, Base inlet OD	Whirlsystem	Model-No.
68,0	214	92,0	187 x 87 x 78	1/2", 3/4"		700318 00 0 00 0000
75,0	219	117,0	206 x 109 x 86	3/4", 3/4"	Air-System	760318 00 0 AS 0000
78,0	221	120,0	206 x 109 x 86	3/4", 3/4"	Jet-System	760318 00 0 JS 1000
84,0	225	126,0	206 x 109 x 86	3/4", 3/4"	Combi-System P	760318 00 0 CP 1000
97,0 - 104,0	234 - 239	139,0 - 146,0	206 x 109 x 86	3/4", 3/4"	Combi-System E	760318 00 0 CE 1000
104,0 - 111,0	239 - 244	146,0 - 153,0	206 x 109 x 86	3/4", 3/4"	Combi-System L	760318 00 0 CL 1000

**DURAVIT AG**  
P.O. Box 240  
Werderstr. 36  
78132 Hornberg  
Germany  
Phone +49 78 33 70 0  
Fax +49 78 33 70 289  
info@duravit.com  
www.duravit.com

