



Specification

| | |
|--|-----------------------------------|
| Product Type: | Bathroom Tap |
| Main Construction Material: | Brass |
| Mount Type: | Deck Mounted |
| Handle Type: | Crosshead Handles |
| Connection Inlet: | G 1/2" BSP |
| Connection Outlet: | Flow Straightener |
| Number of Tap Holes: | 3 |
| Valve/Cartridge Type: | 1/4 Turn 1/2" Ceramic Disc Valve |
| Plumbing System Requirements: | Suitable for all plumbing systems |
| Minimum Dynamic Pressure (bar): | 0.4 bar |
| Maximum Dynamic Pressure (bar): | 5.0 bar |
| Maximum Hot Water Temperature °C: | 60°C |
| Maximum Static Pressure (bar): | 10 bar |
| Flow Type: | Single Flow |
| Isolation Included: | No |


Features:

- Compatible with low pressure water systems, optimised for UK market
- Quarter turn ceramic discs - for smooth operation and added durability
- Spout swivels left to right
- Includes pop up waste
- Available in a selection of finishes

Product Certifications:



Dimensions (measurements in mm)

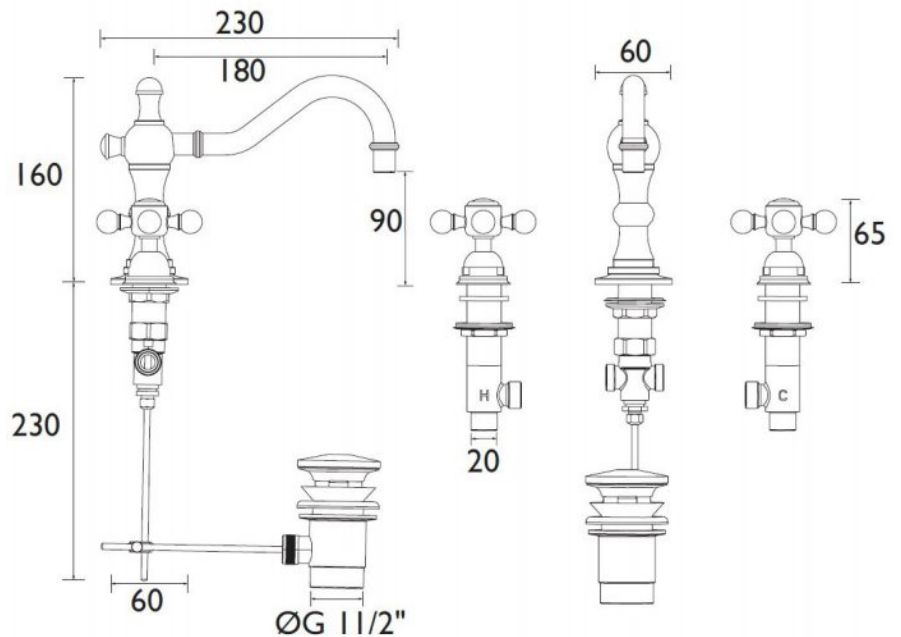

Additional Information:

Flow Rates (l/min)

| System Pressure (bar) | 0.4 | 0.5 | 1 | 2 | 3 | 5 |
|-----------------------|-----|-----|------|------|------|------|
| THRG09 (mixed) | 8.8 | 9.8 | 13.9 | 19.7 | 24.1 | 31.1 |