

Zehnder Alura



Stocked Items



In stock items highlighted in black	Height mm	Width mm	Finish	No. of sections	With factory fitted controls, IPX4 Zone 1 Bath, Zone 2 Shower, Class II Electric Rating (Watts)	Weight kg		
Zehnder Alura Electric								
ALE-050-036/F	575	372	white	3	500	7		
ALE-075-046/F	575	472	white	4	750	9		
ALE-100-056/F	575	572	white	5	1000	11		
ALE-125-076/F	575	772	white	7	1250	15		
ALE-150-086/F	575	872	white	8	1500	17		
ALE-200-116/F	575	1172	white	11	2000	23		
white (RAL 9010)								

Temperature controller: Backlit LCD digital display screen gives complete control. Temperature can be adjusted in 0.5°C increments. 3 pre-set programmes and 5 mode settings. Open window detection system and parental lock. 7 day programmable function.

Open Window detection

The Integral control unit recognises if a window has been opened for an extended period and switches the radiator off. Once the window is closed, the radiator returns to normal operation.

- Temperature changes are quickly recognised via the external temperature sensor
- The integral thermostat proactively reacts to sensor information; delivering the perfect indoor climate
- Intuitive radiator which automatically switches off if a window is open for an extended period
- An intelligent heating solution which lowers costs and energy consumption

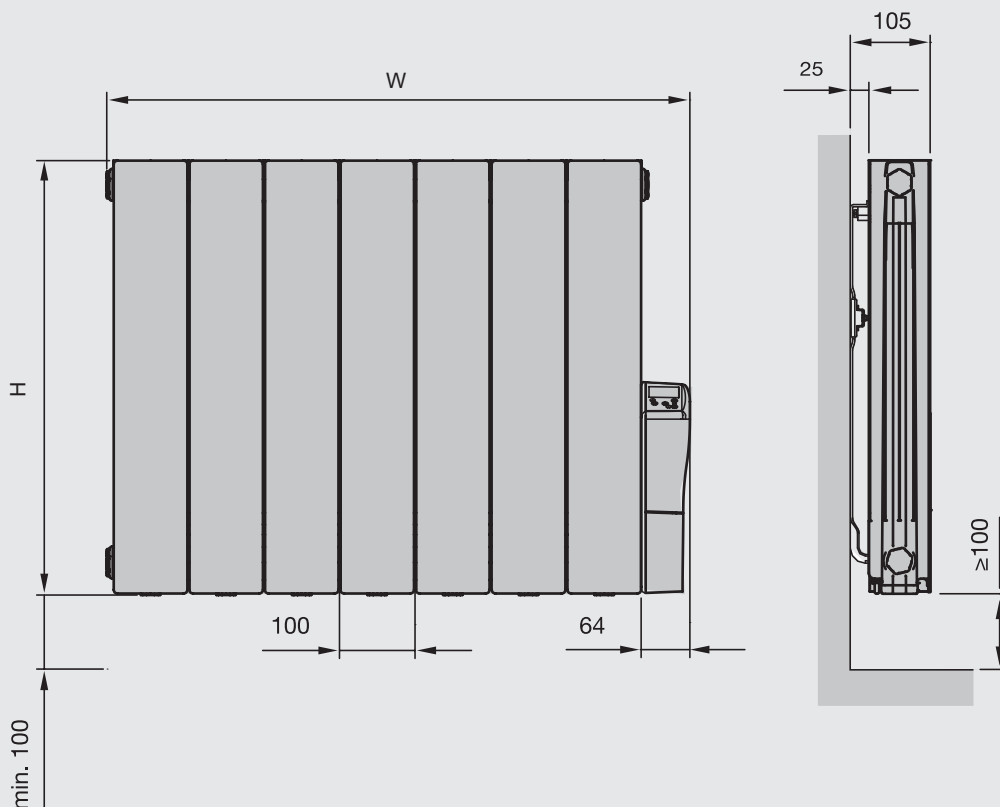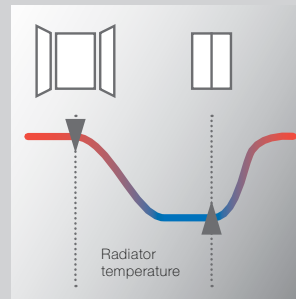

H = height
W = width
All dimensions in mm

The **Alura**, is a fast response electric aluminium radiator with a high heat output despite its compact size. It is lightweight and easy to install, plus the straightforward digital controls make it easy and economical to use. H shaped mounting brackets with a removable spirit level and locking system are also included.



Please note
a 15% surcharge
will be applied to
all prices
displayed, on all
orders placed from
1st August 2021



ALE-100-056/F PURE WHITE 9010