


## Toilet wall mounted for SensoWash® # 253759..00 / 253759..00

| < 370 mm > |

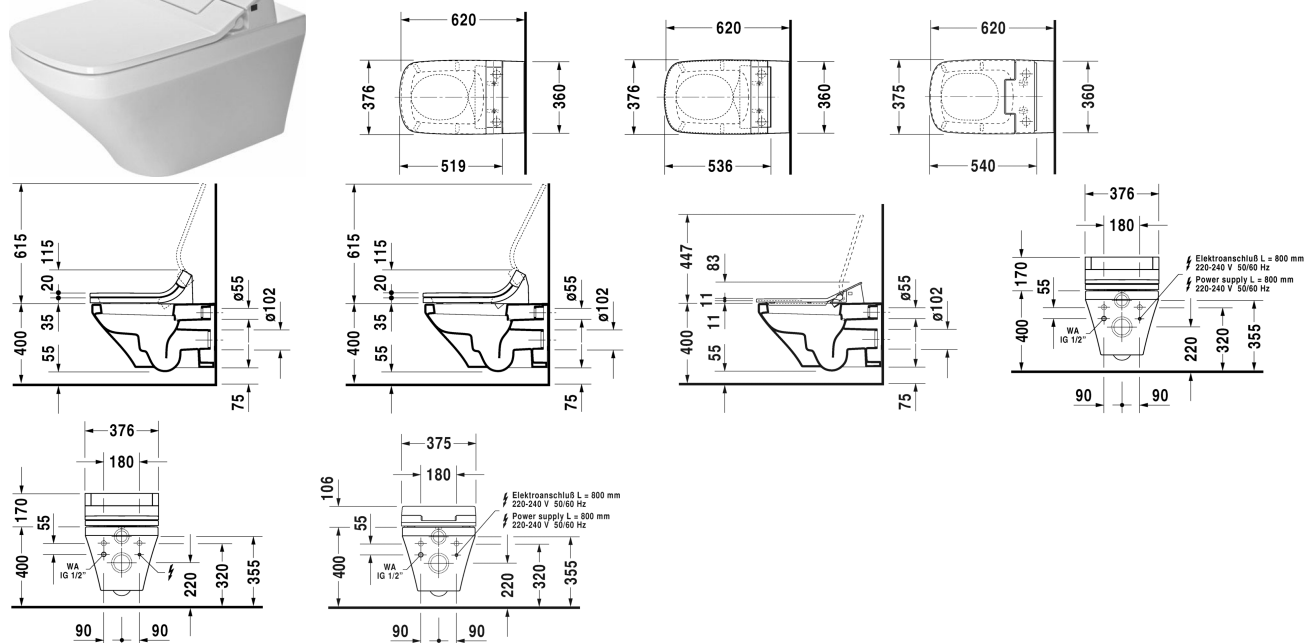

Toilet wall mounted for SensoWash®	Dimension	Weight	Order number
washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included, UWL class 1			
<b>Colors</b>			
00 White Alpin 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
<b>Variant</b>			
4,5 litre flush	370 x 620 mm	30.800 kg	253759..00
4,5 litre flush	370 x 620 mm	30.800 kg	253759..00
<b>Infobox</b>			
Durafix for invisible fixation is included in delivery			
Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number.			
<b>Accessory for ceramics</b>			
Fixing for wall mounted bidet and wall mounted toilet	Ø 12 x 180 mm	0.200 kg	006500

**Toilet wall mounted for SensoWash® # 253759..00 / 253759..00**

|&lt; 370 mm &gt;|

<b>Accessory</b>	
Noise reduction gasket	005090
Connecting set in combination with SensoWash shower toilet seat, for Geberit Monolith sanitary modules for WCs	100692
Connecting set in combination with SensoWash shower toilet seat, for in-wall carriers H=82-100 cm, with conduit pipe for connection inside the tank	100730
Connecting set in combination with SensoWash shower toilet seat, for in-wall carriers H=112-115 cm, with conduit pipe for connection inside the tank	100691
Pre-installation kit in combination with SensoWash, for in-wall carrier with horizontal support without shower toilet pre-installation/conduit pipe	005072
<b>Suitable products</b>	
SensoWash Slim shower toilet seat for DuraStyle* rear-, front and oscillating wash, with automatic closure, night light, remote control included, Locking function via remote control, self-cleaning wand, on / off-button, with concealed connections, Automatic drainage in periods of prolonged disuse, 375 x 540 mm	611200

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*