


GENERAL FITTING GUIDE for BATH SHALLOW SEAL TRAP

PRODUCT SHOWN WILL VARY
DEPENDING ON MODEL

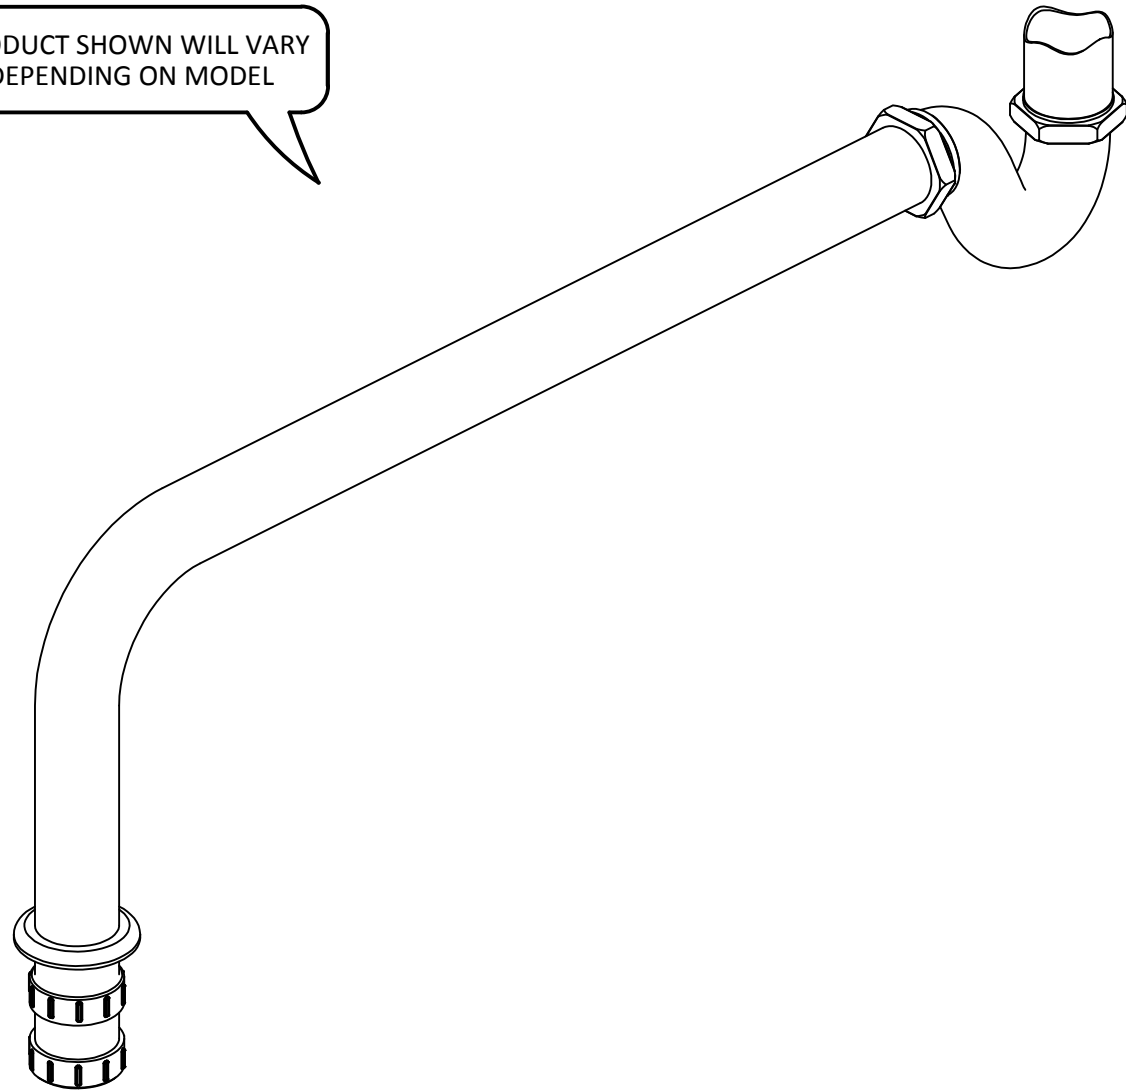

GUARANTEE & AFTERCARE

When installing or using tools, extra care must be taken to avoid damaging the finish or fitting. To maintain the appearance, please ensure it is cleaned regularly using a clean soft damp cloth only. Abrasive cleaners or detergents must not be used as they may cause surface deterioration. The company provides a guarantee against faulty material or manufacture excluding serviceable parts, providing they have been installed, cared for and used in accordance with our instructions.

The company reserves the right to continually evolve its product lines without notification. The company will not accept any liability regarding specification changes and their consequences unless previously quoted by the company in writing.

INSTALLATION PROCEDURE

1. Connect trap to bath waste ensuring the fibre washer is in place.
2. Cut the outlet tube to the required length (for wall or floor outlet).
3. Slide the free nut onto the outlet tube. Flanged side first.
4. Place fibre washer and rubber seal onto the outlet pipe.
5. Tighten free nut onto trap.
6. Fit flange over short end of outlet tube.
7. Attach multi-fit connector to short end of outlet tube.
8. Check for leaks.
9. Push flange against floor or wall.

Note! Always release the captive nut before attempting to align the outlet tube. Failure to do so will result in damage to the components.

