

600 Underslung Basin Unit

ROPER RHODES®
BATH



Handle Specification: Chalk White
No. of Handles - 2
Screw Dimensions - 2 x (4mm x30mm)


All other finishes:
No. of Handles - 2
Screw Dimensions 2 x (4mm x 29mm)



NO.	DESCRIPTION	PRODUCT CODE	FIXINGS INCLUDED?	GROSS WEIGHT	NET WEIGHT
1	HAMPTON 600 UNDERSLUNG BASIN UNIT	HAM600US	YES	26.5kg	26.5kg
2	HAMPTON 600 UNDERSLUNG WORKTOP	HAM4W6AUS.AR	N/A	12.6kg	12.6kg
3	HAMPTON 600 UNDERSLUNG BASIN	HAMUSC1	YES	6.5kg	6.5kg

DIMENSIONS

DIAGRAMS NOT TO SCALE
ALL DIMENSIONS IN MM
TOLERANCE OF ± 5MM

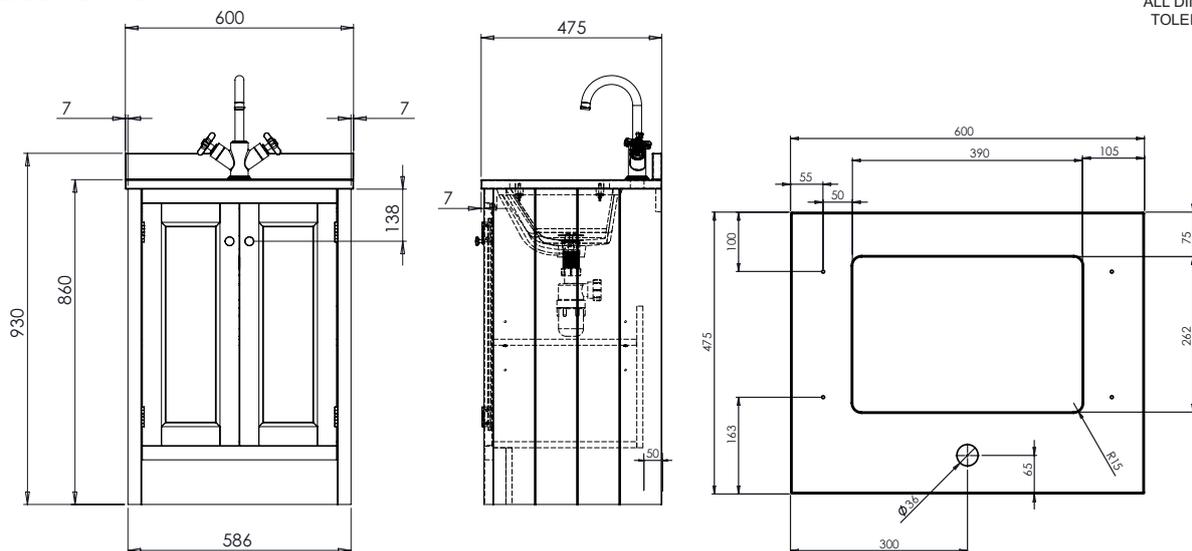

FAQ

- What is the depth of the units with the door open? 740mm
- What is the width of the unit with the doors open? 1600mm
- Are the shelves adjustable? There are a number of shelf positioning holes drilled into the unit side panels.
- How deep is the basin water level? The bowl will fill 120mm from the waste to the overflow.
- How tall is the worktop upstand? How thick is the worktop? Upstand: 70mm Worktop Thickness: 25mm
- Is the underslung basin glazed on the underside? No.
- Can I use other basins with the worktop? No, the worktop is pre-cut to suit the Hampton Underslung Basin in size.
- Is the basin pre-fixed to the worktop? No, they are supplied separately. Fixing brackets are supplied with the worktops to hold the basin in place.
- Can I repair small areas of damage? Yes, we can supply small touch up paint pens for small paint repairs.
- How is the unit secured in place? The unit can be secured to the wall through the upper brace at the rear of the unit. Fixings not supplied.