


thermo Sphere

Self-Adhesive Decoupling Membrane System

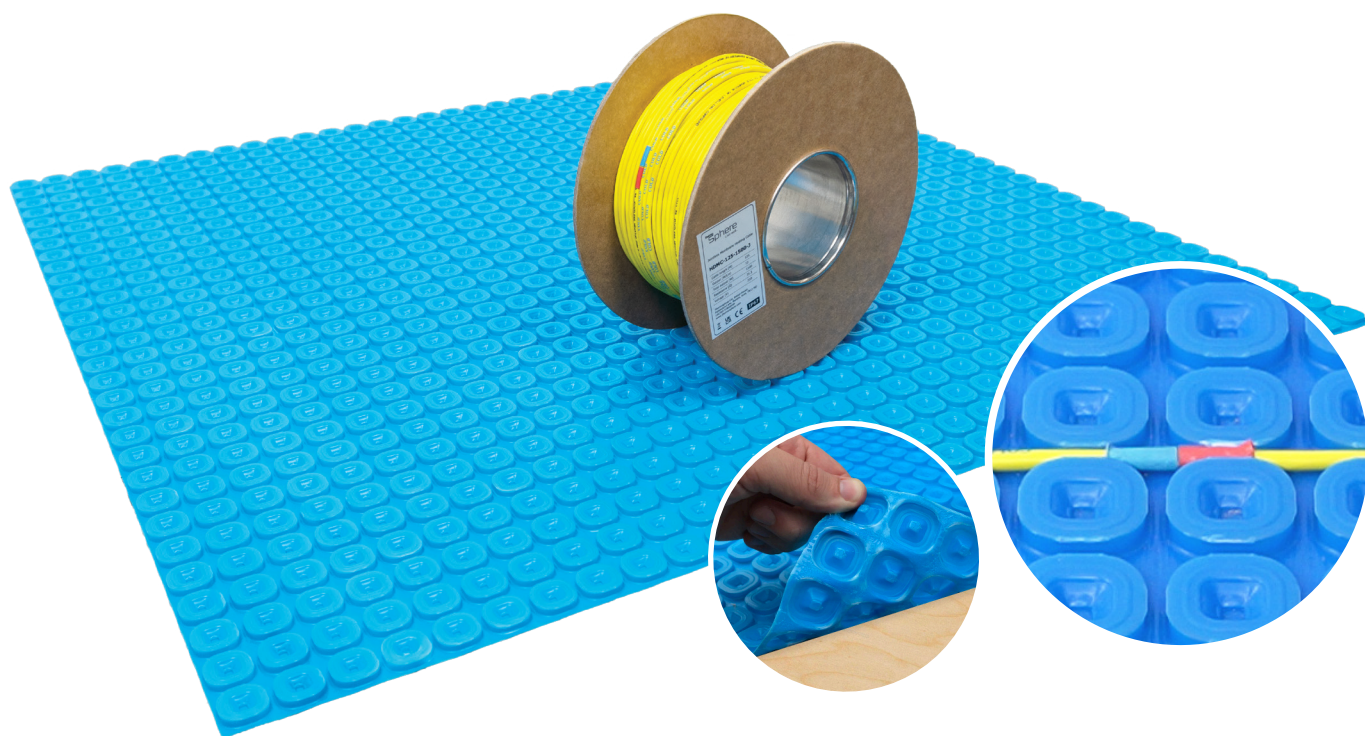

A combined, self-adhesive, electric underfloor heating and decoupling membrane system tested for extra heavy use under tiled floors on clean plywood sub floors.

- **New cable** with slim-line cold tail joint that fits in the membrane channels for faster and easier installation.
- Peel off the protective layer and adhere the self-adhesive membrane to a clean plywood substrate. Activate the adhesive with a weighted roller.
- The mat holds ThermoSphere Membrane Cable at variable spacing to achieve either 130 or 195W/m².
- Decoupling properties neutralise lateral movement in tiled floors and minimise the risk of cracking.
- Creates a waterproof layer within the floor when used with waterproofing products.
- Simple and flexible self adhesive installation process.

Technical data

Voltage	230V
Outputs	130 or 195W/m ²
Total thickness	5.5mm
Cable Length	12 to 200m
Protection rating	IP68
Membrane material	Polypropylene
Cable insulation	FEP and HR-PVC
Robinson test rating	Extra heavy use
Recommended max temp	27°C (limited by controls)
Warranty	Lifetime

Membrane sizes and outputs


Code	Description	Area (m ²)	Size (M)	Unit
HDM-SA-001	Self adhesive decoupling membrane 1m ²	1	1 x 1	Panel
HDM-SA-015	Self adhesive decoupling membrane 15m ²	15	15 x 1	Roll

Cable sizes and outputs


Code	Length (m)	Area 130W/m ²	Area 195W/m ²	Output (W)	Resistance (Ω)
HDMC-012-0150J	12	1.15	0.77	150	352.67
HDMC-018-0225J	18	1.73	1.15	225	235.11
HDMC-025-0300J	25	2.31	1.54	300	176.33
HDMC-031-0375J	31	2.88	1.92	375	141.07
HDMC-037-0450J	37	3.46	2.31	450	117.56
HDMC-042-525J	NEW! 42	3.90	2.60	525	100.76
HDMC-050-0600J	50	4.62	3.08	600	88.17
HDMC-055-675J	NEW! 55	5.10	3.40	675	78.37
HDMC-061-0750J	61	5.77	3.85	750	70.53
HDMC-075-0900J	75	6.92	4.62	900	58.78
HDMC-090-1080J	NEW! 90	8.32	4.99	1080	48.98
HDMC-100-1200J	100	9.23	6.15	1200	44.08
HDMC-125-1500J	125	11.54	7.69	1500	35.27
HDMC-150-1800J	150	13.85	9.23	1800	29.39
HDMC-175-2100J	NEW! 175	16.17	10.78	2100	25.19
HDMC-200-2400J	200	18.46	12.31	2400	22.04

thermo Sphere


New slim-line cold tail joint for easier, faster installation

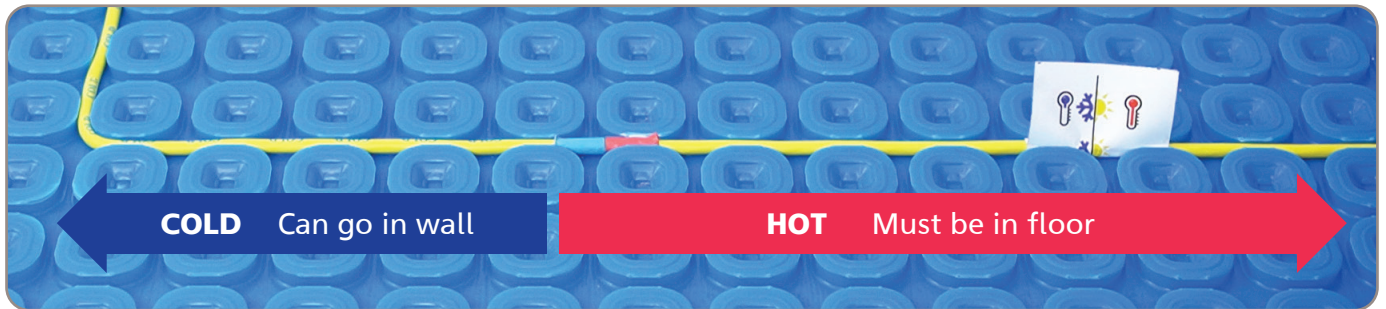

Variable spacing and output per m²

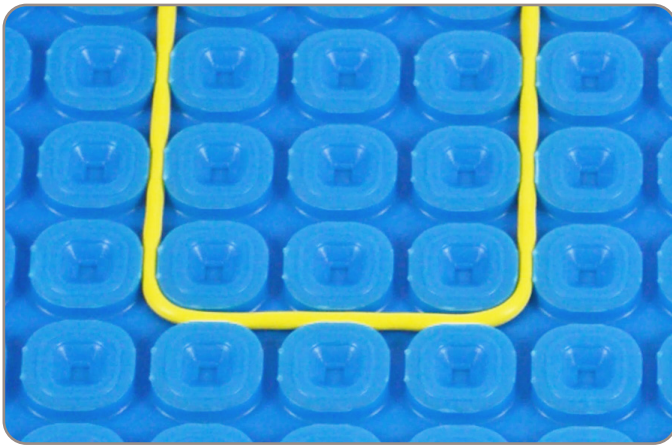

130W/m² at 3 dimple spacing

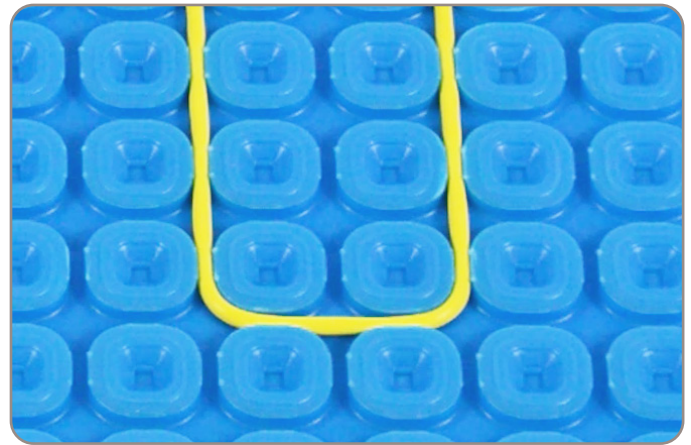

195W/m² at 2 dimple spacing

Tiled floor build up on a plywood sub floor

