

AFTERCARE INSTRUCTIONS


These products have a high quality, durable finish which in order to preserve, should be treated with care.

Clean with warm soapy water and a soft damp cloth only.

Cleaning products, including non-scratch ones could damage the finish.

Maintain your brassware by wiping dry after use, removing water drops and soap deposits

Water Flow Rate:

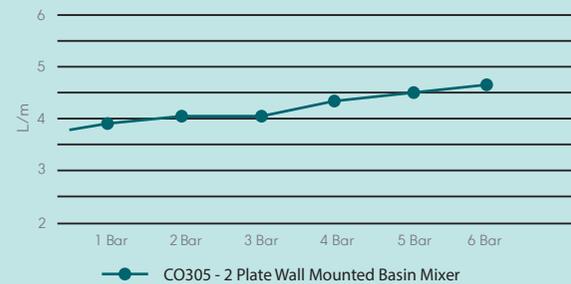

CUSTOMER SERVICE


t: +44(0)208 686 5100
e: technical@saneux.com

Iain Stewart Centre, Beehive Ring Road,
Gatwick, RH6 0PB

www.saneux.com

COS

INSTALLATION INSTRUCTIONS

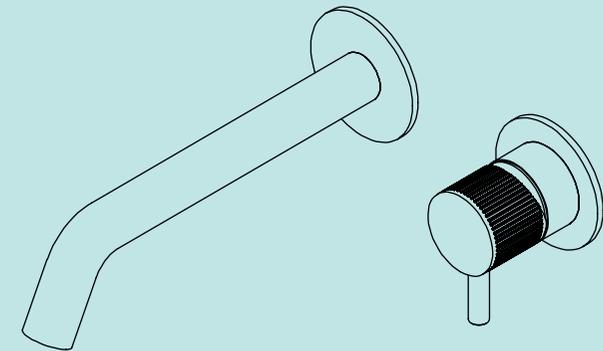

CO305 - CO305S - CO305L
Classic / Knurled / Fluted

2 Plate Wall mounted Basin Mixer

saneux



BEFORE YOU BEGIN

Be sure to flush the pipes of any possible debris before connecting the tap to the water supply as this could cause damage to the tap.

Ensure all components are present prior to installation.



Before installation ensure the water mains are off.

Exploded component assembly

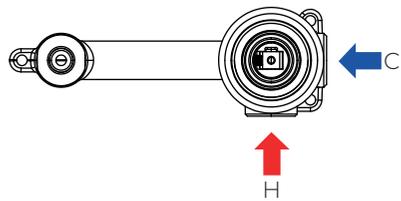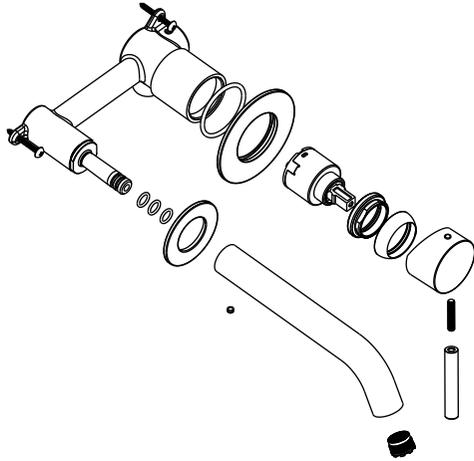


1. Ensure the pipework is correctly arranged to suit the position of the hot / cold inlets (etched on the valve body).

2. Fix the valve to the supporting framework using the screws provided.

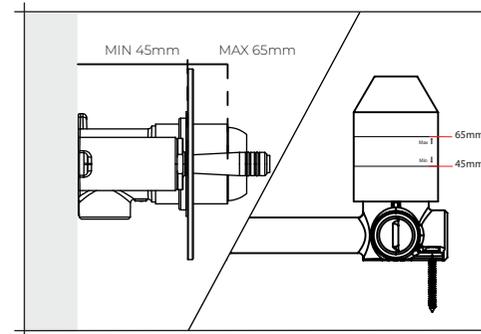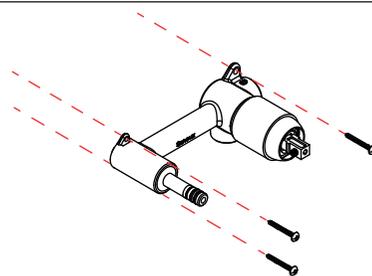

3. Ensure the valve is set back from the finished front face of the wall by the correct depth of min 45mm max 65mm (Allow for tiles, adhesive, etc).

4. Fix the valve to the supporting framework using the screws provided.



5. Ensure the pipework is correctly arranged to suit the position of the hot / cold inlets (etched on the valve body).



6. Fix the valve to the supporting framework using the screws provided.

