

SI PROSNK C

SILHOUETTE Tap Range Silhouette Professional Sink Mixer Chrome



Specification

Product Type:	Kitchen Taps
Main Construction Material:	Stainless Steel; ABS
Mount Type:	Deck
Handle Type:	Lever
Connection Inlet:	1/2" BSP Flexible Tails
Connection Outlet:	Spray Handset
Number of Tap Holes:	1
Valve/Cartridge Type:	35mm Single Lever Cartridge
Plumbing System Requirements:	Suitable for high pressure systems only
Minimum Dynamic Pressure (bar):	1.5 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	60°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

Features:

- Swivel spout with professional pull-down hose for easy use
- Everything you need in the box including flexible tails and fixing kit
- Long life ceramic cartridge for added durability and ease of use
- High quality metal fixings for security and durability
- Particular attention should be paid to this product which will need to be installed in accordance with your local Water Authority/Water Regulations


Product Certifications:



For more products, visit our website:
<http://www.bristan.com>



Dimensions (measurements in mm)

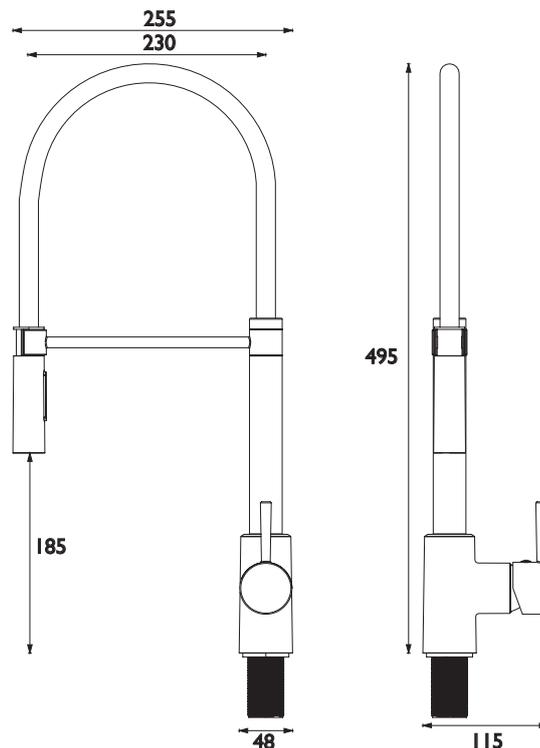

Flow Rates (l/min)

System Pressure (bar)	1.5	2	3	4	5
SI PROSNK C (mixed)	6.2	7.1	8.8	10	11.4

TECHNICAL DATA SHEET



BRISTAN

D1