

SOLO-NMT LL

SOLO Tap Range Solo Non-Thermostatic Tall Pillar Healthcare Tap with Long Lever Handle



Features:

- Pressure balancing tall basin mixer tap with long lever handle
- Maximum temperature stop is adjustable for user safety and comfort
- Removable spout to aid infection control regimes
- A choice of fully draining or laminar flow outlets supplied
- Smooth machined internal waterways to help limit the build-up of bacteria within the tap body
- All flow limiters accurate to +/- 10%

Product Certifications:



WRAS Certificate No: 2210900
WRAS Expiry Date: 31/10/2027




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Commercial
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Lever
Connection Inlet:	15mm Compression
Connection Outlet:	M24 Flow Straightener
Number of Tap Holes:	1
Valve/Cartridge Type:	35mm Cartridge
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.5 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	80°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

Dimensions (measurements in mm)

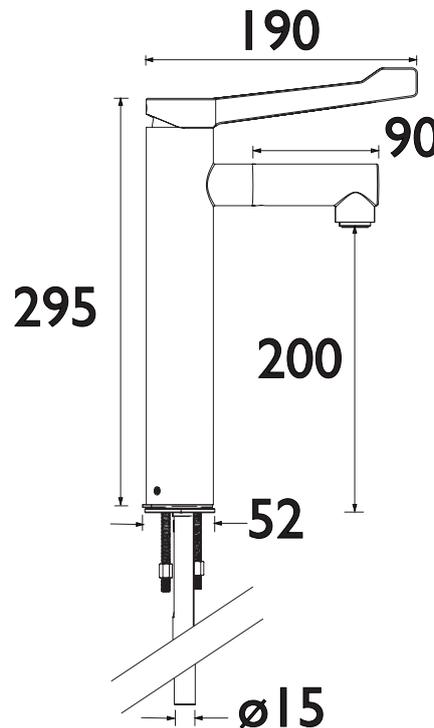

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	4	5
SOLO-NMT LL (mixed)	3.3	4.6	5	5	5	5

TECHNICAL DATA SHEET



BRISTAN

D5