

Technical Data Sheet

Shower Systems

TAVISTOCK

No.	Description	Code	Fixings Included
1	Axiom Single Function System with Shower Head	SAX2377	YES




**FLOW RATE DATA IS TESTED UNDER
LABORATORY CONDITIONS: ACTUAL FLOW
RATE MAY VARY DEPENDING ON DOMESTIC
SUPPLY AND ACCESSORIES**

Inlet Pressure	Flow Rate (l/min)
0.5bar	7.2
1bar	10.6
2bar	14.5
3bar	17.6
4bar	20.2
5bar	22.1

Dimensions - Overview

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

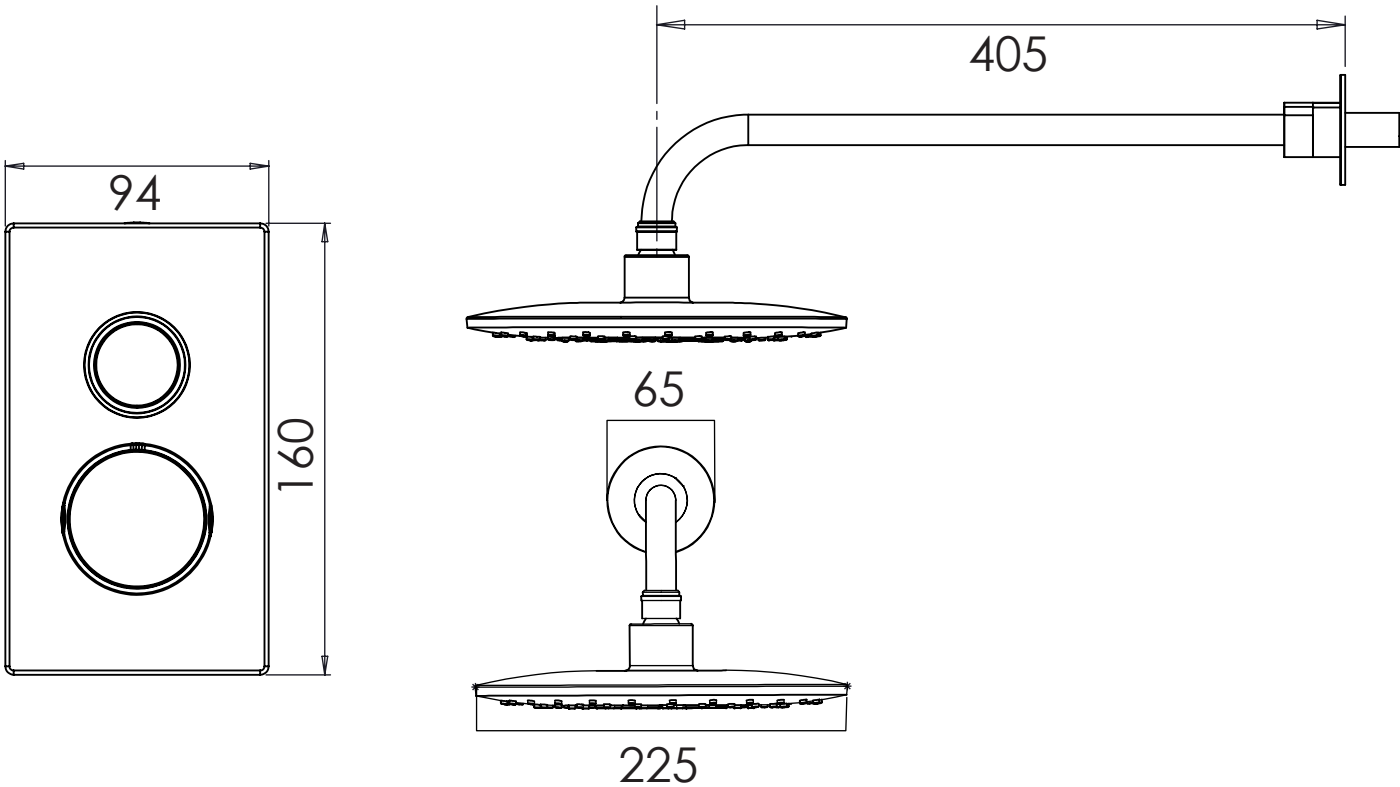

FAQs

Components

- What is the minimum pressure for the valve?** 1.0bar

What is the valve connection size? 1/2" suitable for 15mm pipework
- Thermostatic Single Function Push Button Brass Shower Valve - RR15

Single Function Chrome Plated Shower Valve Cover Plate - SVCOMP5

225mm Chrome Plated Shower Head - SVARM01

Round Adjustable Chrome Plated Shower Arm - TAVSHEAD1