

Technical Data Sheet

Cheltenham 2F Concealed Shower System CH - SMT1611

TAVISTOCK

No.	Description	Code	Fixings Included
1	Cheltenham 2F Concealed Shower System CH	SCM1611	YES




Chrome Plated

**FLOW RATE DATA IS TESTED UNDER
LABORATORY CONDITIONS: ACTUAL FLOW
RATE MAY VARY DEPENDING ON DOMESTIC
SUPPLY AND ACCESSORIES**

Minimum Pressure:	1BAR
Inlet Pressure	Flow Rate (l/min)
1bar	11.6
2bar	17
3bar	21

Dimensions - SCM1611

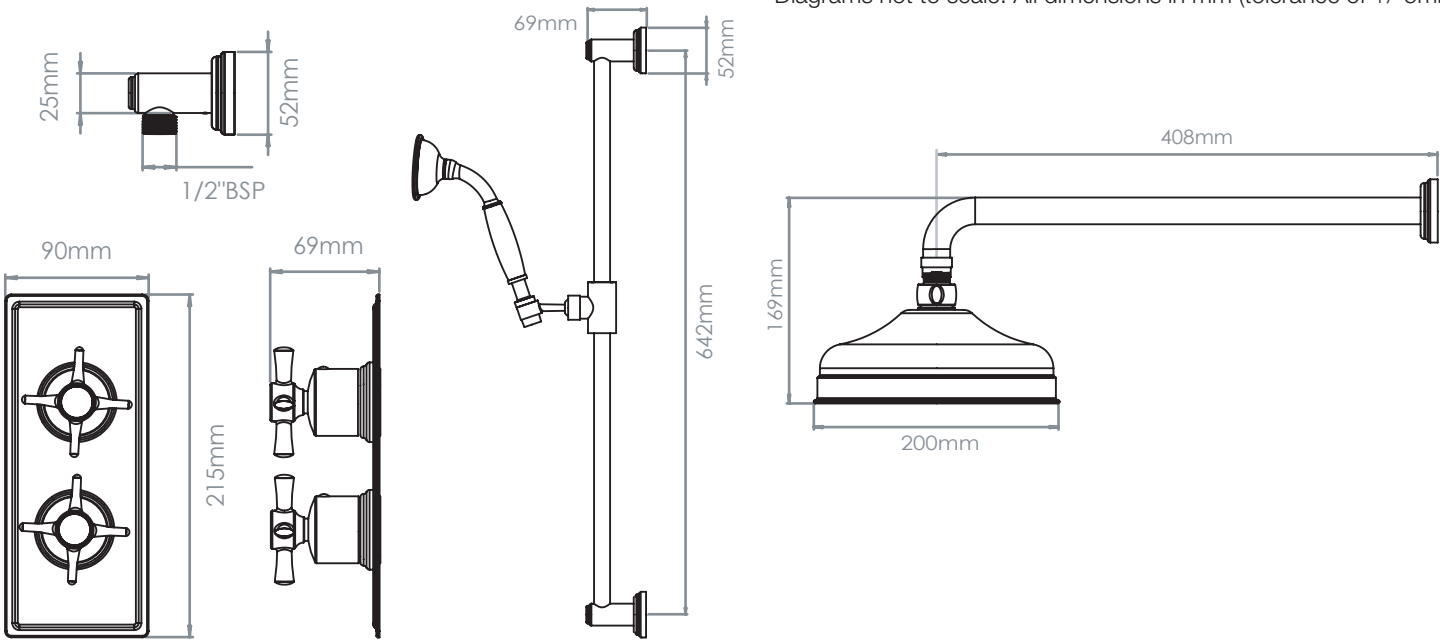

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

FAQs

- What is the size of the connections?** The valve uses 1/2" connections.
- Can I have both shower options on at the same time?** Yes
- What size Pipework do i need?** 15mm
- Is it suitable for stud walls?** It is recommended you use CLS size 89mm depth within the wall
- Does the valve include isolation points?** Yes
- What is the recommended minimum pressure?** 1.0bar

Components

- Dual Function Valve - Brass
- Chrome Shower Plate - Brass
- Chrome Valve Handle - ABS
- Riser rail - Brass
- Handset - Brass
- Shower Hose - Stainless Steel
- Wall Elbow - Brass
- Adjustable Fixed arm - Brass
- Shower Head - Brass