

Technical Data Sheet

Zone Dual Function Concealed Shower Valve

SZN1611 (Chrome)

TAVISTOCK


No.	Description	Code	Fixings Included
1	Cheltenham 2F Concealed shower System CH	SCM1612	YES



FLOW RATE DATA IS TESTED UNDER
LABORATORY CONDITIONS: ACTUAL FLOW
RATE MAY VARY DEPENDING ON DOMESTIC
SUPPLY AND ACCESSORIES

Minimum Pressure:	1BAR
Inlet Pressure	Flow Rate (l/min)
1bar	11.6
2bar	17
3bar	21

Dimensions - Overview

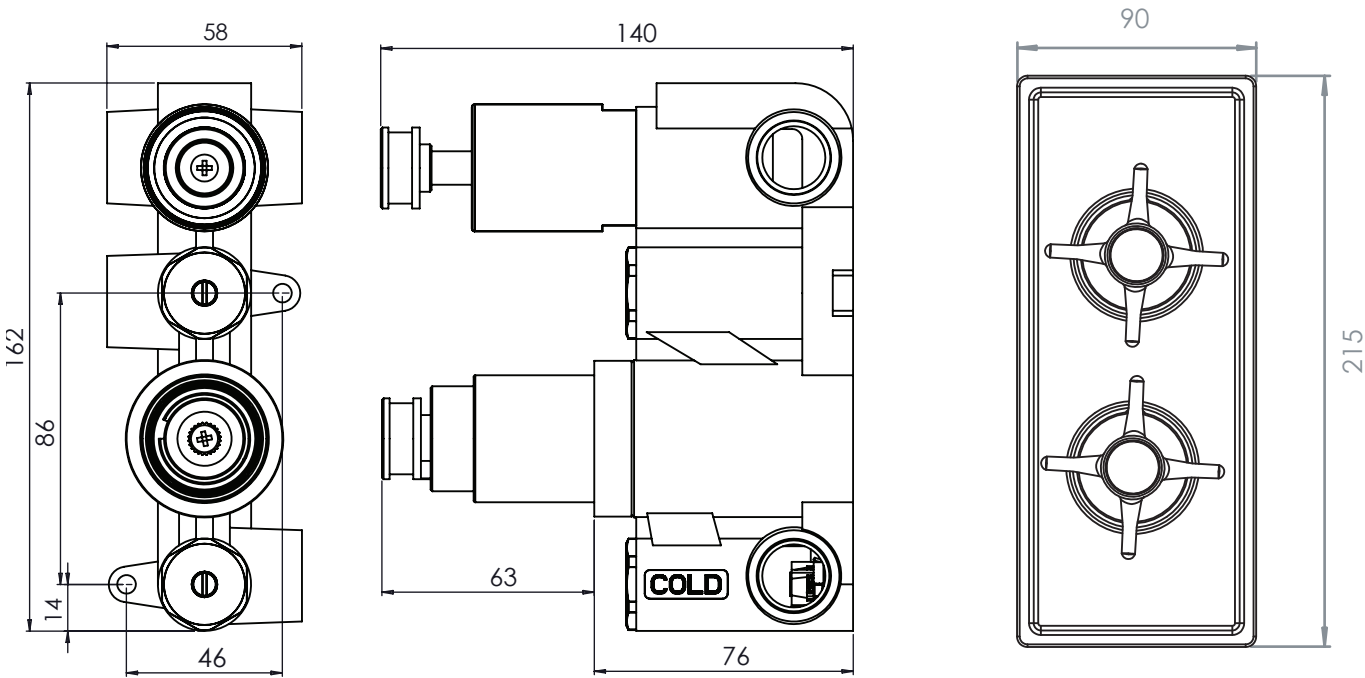

FAQs

Components

- What is included in the valve box?** The valve, a cover plate, a set of handles and trim rings.
- What is the size of the connections?** The valve uses 1/2" connections.
- What is the recommended minimum pressure?** 1.0bar
- Can both outlets be used at the same time?** No, only one outlet can be on at a time

- Dual Function Valve - Brass
- Valve Cover Plate - Steel
- Concealed Valve Handle - ABS