Technical Data Sheet


Shower Systems

TAVISTOCK

No.	Description	Code	Fixings Included
1	Lansdown 2F Exposed Shower System	SLD1701, SLD1702	YES
		FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES	
		Miniumum Pressure:	1 BAR
		Inlet Pressure	Flow Rate (I/min)
		0.5 bar	9.6
	. [\	1 bar	14.7
		2 bar	21.9
		3 bar	26.1

Dimensions - Overview

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

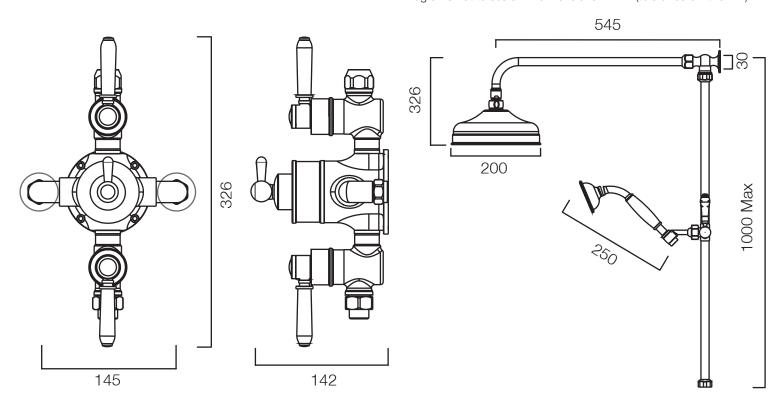

FAQs

How tall is the riser rail? 1000mm - this can be cut down if necessary

How long is the shower hose? 1.5m

What is the minimum pressure for the valve? 1.0bar

What is the valve connection size? 1/2" suitable for 15mm pipework