Technical Data Sheet
Quantum Dual Function Concealed Shower System
SQT1611 (Chrome), SQT1612 (Black), SQT1613 (Brass), SQT1624 (Gunmetal)

TAVISTOCK

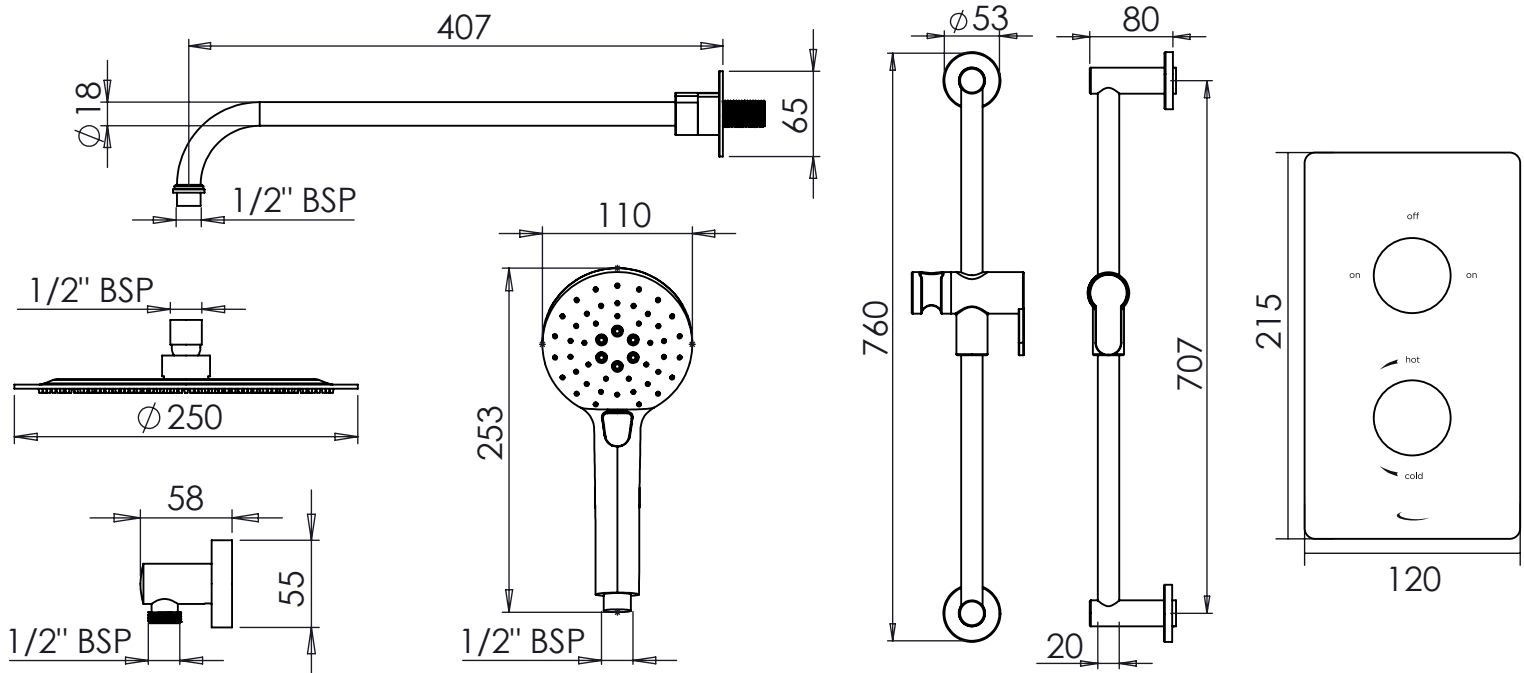| Description	Code
Quantum 2F Concealed Shower System with Riser	SQT1611, SQT1612, SQT1613, SQT1624

Chrome Plated   Electroplated   PVD   PVD

Inlet Pressure	Flow Rate (l/min)
1bar	11.6
2bar	17
3bar	21

FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES.

Dimensions

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

407
ϕ18
65
1/2" BSP

1/2" BSP
ϕ250

58
55
1/2" BSP

110
253
1/2" BSP

ϕ53
80
760
707
20

215
off
on   on
hot
cold
120

FAQs

What is the size of the connections? The valve uses 1/2" connections.

Can I have both shower options on at the same time? No

What size Pipework do I need? 15mm

Does the valve include isolation points? Yes

What is the recomended operating pressure? 1.0bar