

OP TS3650 EL C

OPAC Shower Range TS3650 Opac Lever Exposed Shower Valve



Features:

- Single sequential control for both temperature and flow
- High performance even at low pressure
- Automatic shut off in the event of hot or cold water supply failure
- Adjustable isolation inlet elbows allow centres between 140mm-160mm
- Integral thermal flushing for infection control

Product Certifications:



WRAS Certificate No: 2005903
WRAS Expiry Date: 31/05/2025



TMV3 Cert No: NSF2277/0720
TMV3 Expiry Date: 16/07/2025




TMV2 Cert No: NSF2276/0920
TMV2 Expiry Date: 11/09/2025

Specification

| | |
|--|-----------------------------------|
| Finish/Colour: | Chrome Plated |
| Main Construction Material: | Brass |
| No of Controls: | 1 |
| Shower Type: | Sequential |
| Shower Head Type: | N/A |
| Valve/Cartridge Type: | Sequential Cartridge |
| Maximum Hot Water Supply Temperature °C: | 65 |
| Maximum Static Pressure: (bar) | 10 |
| Plumbing System Suitability: | Suitable for all plumbing systems |
| Minimum Dynamic Pressure: | Min: 0.2 bar, Max: 5 bar |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | G 1/2" |
| Isolation Valve Included: | Yes |
| Check Valve Included: | Yes |

Dimensions (measurements in mm)

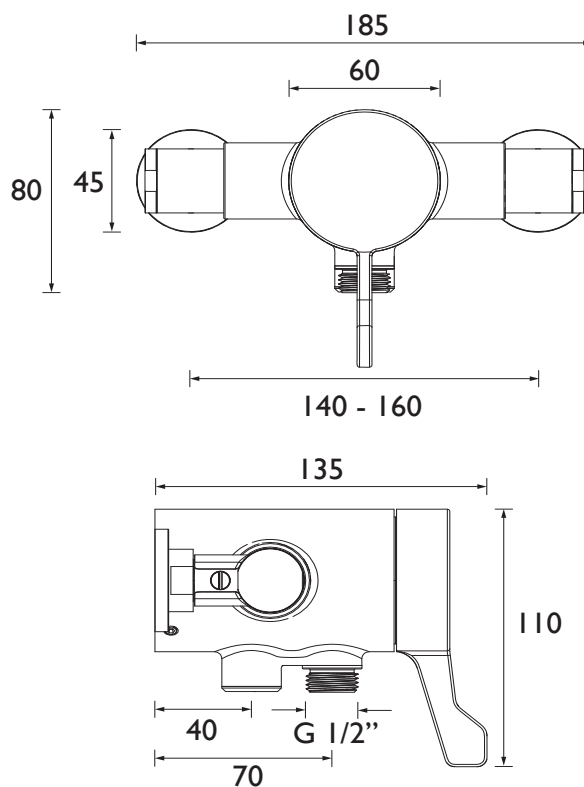

Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 |
|-----------------------|-----|-----|---|---|-----|---|
| Open Outlet (mixed) | 3.9 | 6.3 | 6 | 7 | 7.5 | 8 |

TECHNICAL
DATA
SHEET




BRISTAN

D2

OP TS3650TO EL C

OPAC Shower Range TS3650 Opac Lever Rigid Riser Shower Valve

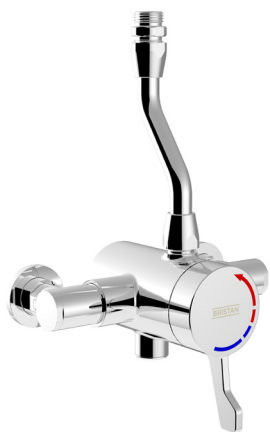

Features:

- Single sequential control for both temperature and flow
- High performance even at low pressure
- Automatic shut off in the event of hot or cold water supply failure
- Adjustable isolation inlet elbows allow centres between 140mm-160mm
- Integral thermal flushing for infection control

Product Certifications:



WRAS Certificate No: 2005903
WRAS Expiry Date: 31/05/2025



TMV3 Cert No: NSF2277/0720
TMV3 Expiry Date: 16/07/2025




TMV2 Cert No: NSF2276/0920
TMV2 Expiry Date: 11/09/2025

Specification

| | |
|--|-----------------------------------|
| Finish/Colour: | Chrome Plated |
| Main Construction Material: | Brass |
| No of Controls: | 1 |
| Shower Type: | Exposed |
| Shower Head Type: | N/A |
| Valve/Cartridge Type: | Sequential Cartridge |
| Maximum Hot Water Supply Temperature °C: | 65 |
| Maximum Static Pressure: (bar) | 10 |
| Plumbing System Suitability: | Suitable for all plumbing systems |
| Minimum Dynamic Pressure: | Min: 0.2 bar, Max: 5 bar |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | G 1/2" |
| Isolation Valve Included: | Yes |
| Check Valve Included: | Yes |

Dimensions (measurements in mm)

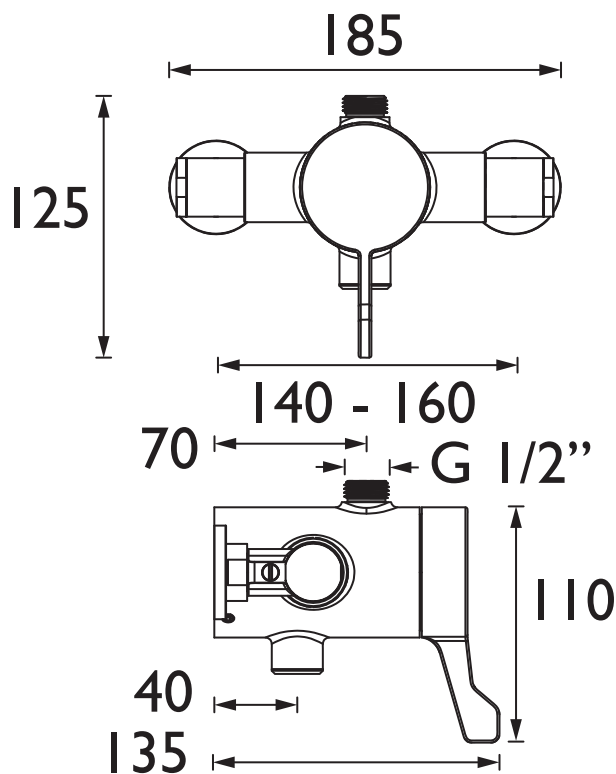

Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 |
|-----------------------|-----|-----|---|---|-----|---|
| Open Outlet (mixed) | 3.9 | 6.3 | 6 | 7 | 7.5 | 8 |

TECHNICAL
DATA
SHEET



BRISTAN

D2