



Installation instructions

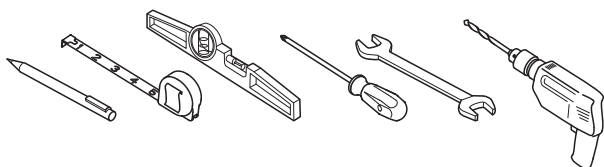

Please read these instructions carefully before installation and store safely for future reference.

INSTALLATION

1. Fit joggle strip to wall 895mm to top edge.
2. Lay unit on to its back and fit front & rear leg sets - (Optional).
3. Remove front access panel.
4. Stand the unit upright on its legs.
5. Fit the B4449AA tap to unit following manufacturer installation detail.
6. Connect 1¼" waste to top bowl.
7. Connect 1½" waste to bottom bowl.
8. Hang the unit on the fitted joggle strip.
9. Once happy with position screw down to floor through the round adjustable feet.
10. Connect incoming water supply to tap gaining access to inlet via removable access panel.
11. Connect Outlet to 1¼" waste gaining access via removable access panel.
12. Connect outlet to 1½" waste gaining access from the underside.
13. Re-fit the access panel.
14. Pin unit to wall gaining access through removable access panel & underside

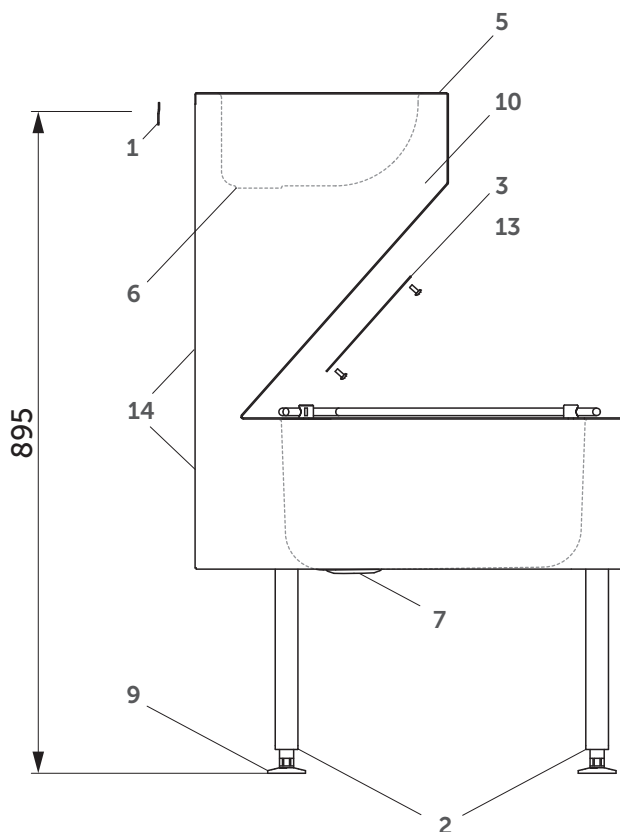

CUSTOMER CARE HELPLINE

01482 496318

FAX LINE 01482 499611
email: customer care@idealstandard.com

ww10**0040**67
ver. 1.0/10.22