AE SHCAR C

ACUTE Shower Range
Acute Recessed Shower Valve with Adjustable Riser Chrome



Features:

- Thermostatic cartridge with preset temperature stop at 41C
- TMV2 thermostatic control for a higher level of performance and protection
- Supplied with 1 x 7L/min and 1 x 5L/min flow regulators
- Adjustable fixing brackets on riser rail enables existing screw holes to be used
- Includes rub-clean anti-limescale handset

Product Certifications:

WRAS APPROVED PRODUCT

WRAS Certificate No: 1904904
WRAS Expiry Date: 30/04/2024

TMV2 NSF SCHEME – NSF Certified to NSF TMV2

TMV2 Certificate No:NSF2124/0619
TMV2 Expiry Date: 13/012/2024


Unified Water Label – 7.5 l/min

For more products, visit our website:
http://www.bristan.com

Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Sequential Mini Valve
Shower Head Type:	Adjustable
Shower Kit:	Adjustable Riser
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	All plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.1
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2”
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

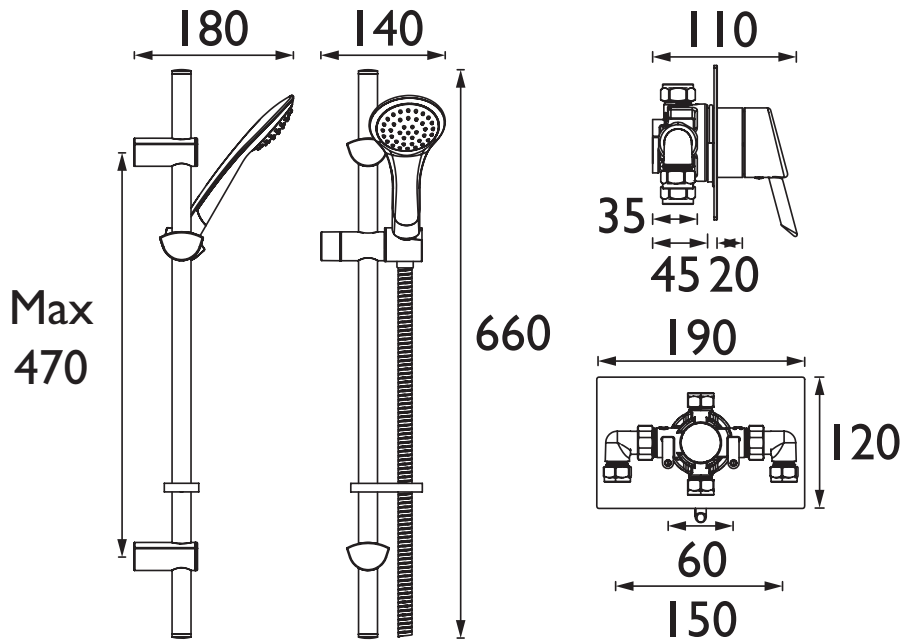

Flow Rates (l/min)

System Pressure (bar)	0.1	0.2	0.5	1	2	3	5
Through Handset (mixed)	1.8	2.8	4.7	6.6	7	7.1	7.9
With Flow Limiters (mixed)	1.6	2.4	4	5.8	6.6	7.5	7.5

TECHNICAL DATA SHEET

TOP QUALITY 5 YEARS GUARANTEED *

BRISTAN

D13

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* **- Non-chrome product finishes carry a 3 year guarantee on finish.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.