





Radiator Name: CLASSICO

This product must be fitted only by a fully qualified installer


Description	Illustration	Qty
Radiator		1
Bracket		4
Fixing Screw		4
Air Vent		1
End Plug		1

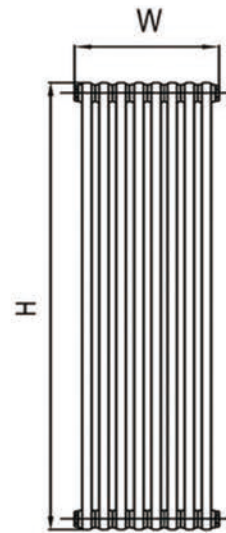

Front View

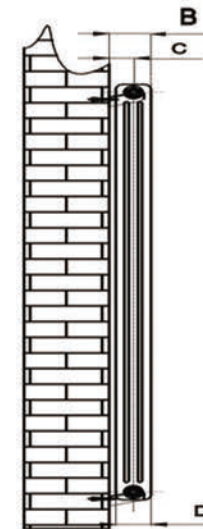

Side View

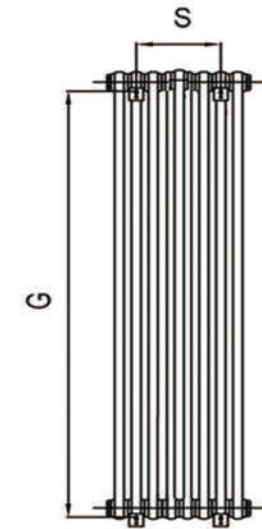

Back View

GENERAL RECOMMENDATION

Before fitting the radiator, it is necessary to wash out the heating system to remove any existing mud, scale, work residues, traces of flux, oil etc...

When the system water PH is outside the 5.5 - 8.5 range and/or when the dissolved is above 0.1mg/litre, it is always needed to protect the heating system components(the radiator is one of these) with a proper chemical treatment compatible with all parts in contact with water(Silicon rubber too).



In order to fit the radiator to the wall, it is necessary to choose the proper fixings for the wall material.

If the system water exceeds 50 degrees Celsius, please install a warning mark near the radiator to avoid any accidental scald.

Clean the radiator surface only with a soft cloth to avoid scratching the finish and do not use chemicals against during cleaning operations.

It is prohibited to climb onto the radiator.

Maximum working temperature is 95 centigrad degree. Maximum working pressure is 6 bar.

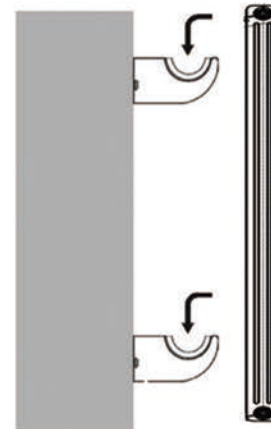

Top view

Hang the radiator on the brackets.

Size	pipe number	Height	Width	Thickness	Hanger Axes Horizontal	Wall to front face of the bracket	Hanger Axes vertical	Wall to pipe center distance	Empty Weight	Water volume
	-	H	W	D	S	B	G	C	-	-
		mm	mm	mm	mm	mm	mm	mm	kg	l
300 X 830	18	300	830	100	675	118	225	68	15.8	10.40
300 X 965	21	300	965	100	810	118	225	68	18.4	12.14
300 X 1190	26	300	1190	100	1035	118	225	68	22.8	15.03
300 X 1370	30	300	1370	100	1215	118	225	68	26.3	17.34
400 X 425	9	400	425	100	270	118	325	68	9.7	6.53
400 X 605	13	400	605	100	450	118	325	68	14.0	9.43
400 X 830	18	400	830	100	675	118	325	68	19.4	13.05
400 X 965	21	400	965	100	810	118	325	68	22.6	15.23
400 X 1190	26	400	1190	100	1035	118	325	68	28.0	18.86
400 X 1370	30	400	1370	100	1215	118	325	68	32.3	21.76
500 X 425	9	500	425	100	270	118	425	68	11.7	7.85
500 X 605	13	500	605	100	450	118	425	68	16.9	11.34
500 X 830	18	500	830	100	675	118	425	68	23.1	15.70
500 X 965	21	500	965	100	810	118	425	68	26.9	18.32
500 X 1190	26	500	1190	100	1035	118	425	68	33.3	22.68
500 X 1370	30	500	1370	100	1215	118	425	68	38.4	26.17
600 X 425	9	600	425	100	270	118	525	68	13.5	9.18
600 X 605	13	600	605	100	450	118	525	68	19.5	13.26
600 X 830	18	600	830	100	675	118	525	68	29.7	18.36
600 X 965	21	600	965	100	810	118	525	68	34.4	21.42
600 X 1190	26	600	1190	100	1035	118	525	68	42.5	26.51
600 X 1370	30	600	1370	100	1215	118	525	68	48.8	30.59
750 X 425	9	750	425	100	270	118	675	68	16.2	11.17
750 X 605	13	750	605	100	450	118	675	68	23.4	16.13
750 X 830	18	750	830	100	675	118	675	68	32.0	22.33
750 X 965	21	750	965	100	810	118	675	68	37.4	26.06
750 X 1190	26	750	1190	100	1035	118	675	68	46.3	32.26
750 X 1370	30	750	1370	100	1215	118	675	68	53.4	37.22
1500 X 425	9	1500	425	100	270	118	1425	68	30.7	21.11
1500 X 515	11	1500	515	100	360	118	1425	68	37.5	25.80
1800 X 245	5	1800	245	100	90	118	1725	68	20.6	13.94
1800 X 335	7	1800	335	100	180	118	1725	68	28.6	19.51
1800 X 425	9	1800	425	100	270	118	1725	68	36.7	25.09
1800 X 515	11	1800	515	100	360	118	1725	68	44.9	30.66
1800 X 560	12	1800	560	100	405	118	1725	68	49.0	33.45