
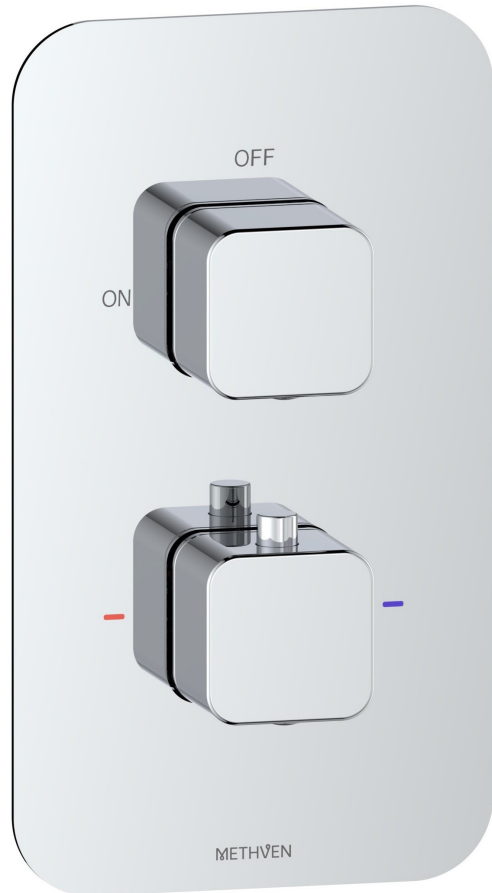


WAI CONCEALED MIXER VALVE - SINGLE OUTLET

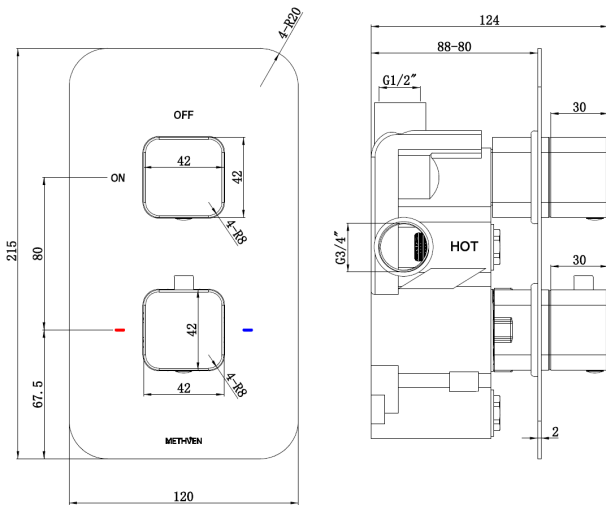

CONSTRUCTION: Brass
CARTRIDGE/VALVE TYPE: Thermostatic
SUPPLY: Suitable For Low Pressure Systems
INLET CONNECTIONS: 3/4" BSP
WORKING PRESSURES: 0.1 - 5.0 bar
OPERATION: Separate Flow And Temperature Controls

- Diverter Cartridge To Single Outlet
- 38°C Temperature Hot Stop With Override Facility
- Front Access Filters - No Need To Disconnect Shower From Water Supply During Maintenance
- Slimline Concealing Plate
- Includes Covers To Protect Valve During Installation

WA1D

Chrome

Open Outlet Flow (Bar - l/min)

| BAR | 0.1 | 0.3 | 0.5 | 1.0 | 2.0 | 3.0 | 4.0 | 5.0 |
|------|-----|-----|------|------|------|------|------|------|
| FLOW | 4.8 | 8.2 | 10.6 | 15.2 | 21.7 | 26.7 | 30.9 | 34.7 |



260717302



2402175

Please Note: Flow rate will be dictated by installation configurations.
 Please ensure to check the appropriate flow restrictor information if applicable.
 *Please refer to website for full warranty details.

FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM

methven.com

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.