

1 1/2" Press Top Bath Waste

PTW404/017

Installation Instructions & Maintenance Guide

Connection: 1 1/2" fitting

Construction: Brass and ABS

Features:

- Extendable overflow tube
- Brass waste body
- Click clack press top waste mechanism



Methven recommends this product should be fitted in compliance with Water Regulations, by a qualified plumber.

Care & Cleaning

Your product has a high-quality finish and should be treated with care to preserve the visible surfaces. Never use abrasives or abrasive cleaning agents to clean this product clean regularly with contamination free warm water and a damp soft cloth. Do not use products containing chlorine bleach or hydrochloric acid as these can damage the product.

Warranty Information

Your product has a warranty of 1 year.

Proof of purchase will be required.

The guarantee does not cover faults or damage caused by incorrect installation and/or maintenance, ordinary wear and tear, water composition, etc.

*Please see www.deva-uk.com for full terms and conditions of warranty.

We have a policy of continuous improvement and reserve the right to change specifications without notice.

METHVEN UK LIMITED
METHVEN EXPERIENCE CENTRE
3/3A STONE CROSS COURT
YEW TREE WAY
GOLBORNE
WARRINGTON
WA3 3JD
UNITED KINGDOM

TEL: 0800 195 1602
FAX: +44 (0) 1942 680 190
EMAIL: sales@uk.methven.com
www.deva-uk.com
www.methven.com



1 1/2" Press Top Bath Waste

PTW404/017

Installation Instructions & Maintenance Guide

Connection: 1 1/2" fitting

Construction: Brass and ABS

Features:

- Extendable overflow tube
- Brass waste body
- Click clack press top waste mechanism



Methven recommends this product should be fitted in compliance with Water Regulations, by a qualified plumber.

Care & Cleaning

Your product has a high-quality finish and should be treated with care to preserve the visible surfaces. Never use abrasives or abrasive cleaning agents to clean this product clean regularly with contamination free warm water and a damp soft cloth. Do not use products containing chlorine bleach or hydrochloric acid as these can damage the product.

Warranty Information

Your product has a warranty of 1 year.

Proof of purchase will be required.

The guarantee does not cover faults or damage caused by incorrect installation and/or maintenance, ordinary wear and tear, water composition, etc.

*Please see www.deva-uk.com for full terms and conditions of warranty.

We have a policy of continuous improvement and reserve the right to change specifications without notice.

METHVEN UK LIMITED
METHVEN EXPERIENCE CENTRE
3/3A STONE CROSS COURT
YEW TREE WAY
GOLBORNE
WARRINGTON
WA3 3JD
UNITED KINGDOM

TEL: 0800 195 1602
FAX: +44 (0) 1942 680 190
EMAIL: sales@uk.methven.com
www.deva-uk.com
www.methven.com




Installation


Sealant can be used on all joints to aide in sealing.

- 1. Extend the overflow tube, undo the overflow face and remove from the overflow elbow.
- 2. Offer up the overflow elbow and elbow washer to the outside of the bath overflow hole.
- 3. Fit the overflow face washer and overflow face to the inside of the bath, and connect to the overflow elbow using the screw.
- 4. Slide the washer up to the underside of the waste flange.
- 5. Place the waste body on the inside of the bath in the waste hole. Use sealant if deemed necessary. Attach the inlet joint and joint washer to the underside of the bath. Ensure the tube connection is aligned with the slotted opening in the waste body.
- 6. Feed the second joint washer onto the waste tail and secure with the backnut.
- 7. Gently slide the overflow tube over the inlet joint and overflow elbow until fully seated, ensuring a secure seal without applying excessive force to prevent splitting.
- 8. Secure the waste tail to the waste pipe (not supplied) Sealant may be required. Once sealant is dry check for leaks.
- 9. To close the waste and fill the bath, simply press down on the waste cover until it clicks to close. Press again to release and raise the cover to drain.

Exploded Diagram

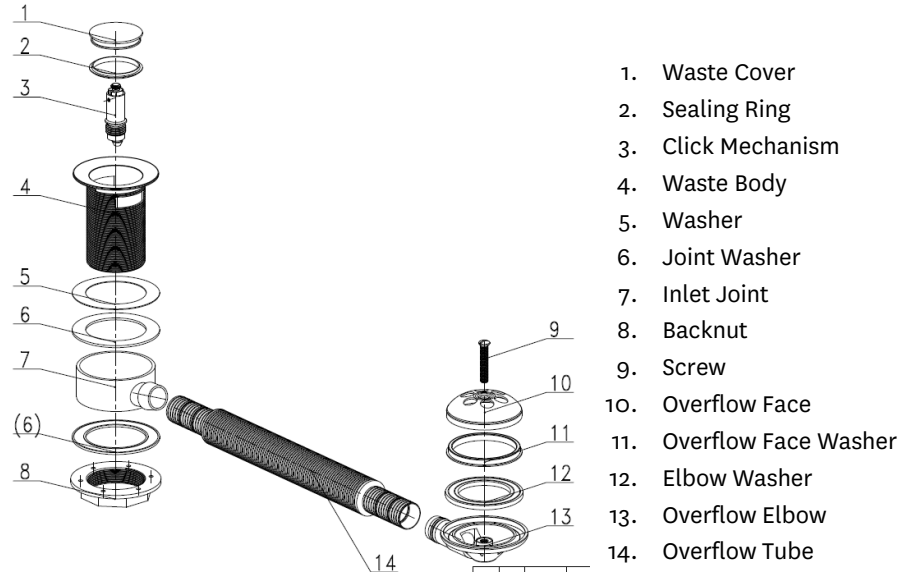

Line Drawing (mm)

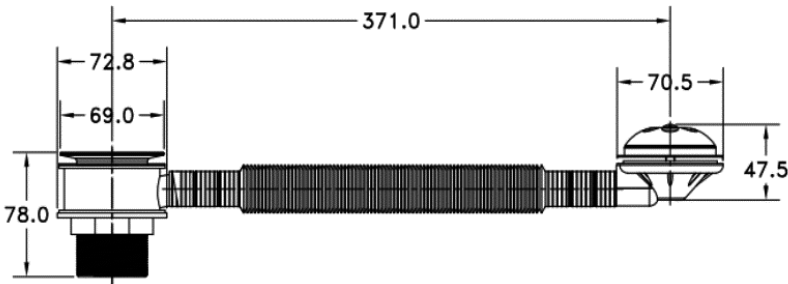


Installation

Sealant can be used on all joints to aide in sealing.

- 1. Extend the overflow tube, undo the overflow face and remove from the overflow elbow.
- 2. Offer up the overflow elbow and elbow washer to the outside of the bath overflow hole.
- 3. Fit the overflow face washer and overflow face to the inside of the bath, and connect to the overflow elbow using the screw.
- 4. Slide the washer up to the underside of the waste flange.
- 5. Place the waste body on the inside of the bath in the waste hole. Use sealant if deemed necessary. Attach the inlet joint and joint washer to the underside of the bath. Ensure the tube connection is aligned with the slotted opening in the waste body.
- 6. Feed the second joint washer onto the waste tail and secure with the backnut.
- 7. Gently slide the overflow tube over the inlet joint and overflow elbow until fully seated, ensuring a secure seal without applying excessive force to prevent splitting.
- 8. Secure the waste tail to the waste pipe (not supplied) Sealant may be required. Once sealant is dry check for leaks.
- 9. To close the waste and fill the bath, simply press down on the waste cover until it clicks to close. Press again to release and raise the cover to drain.

Exploded Diagram

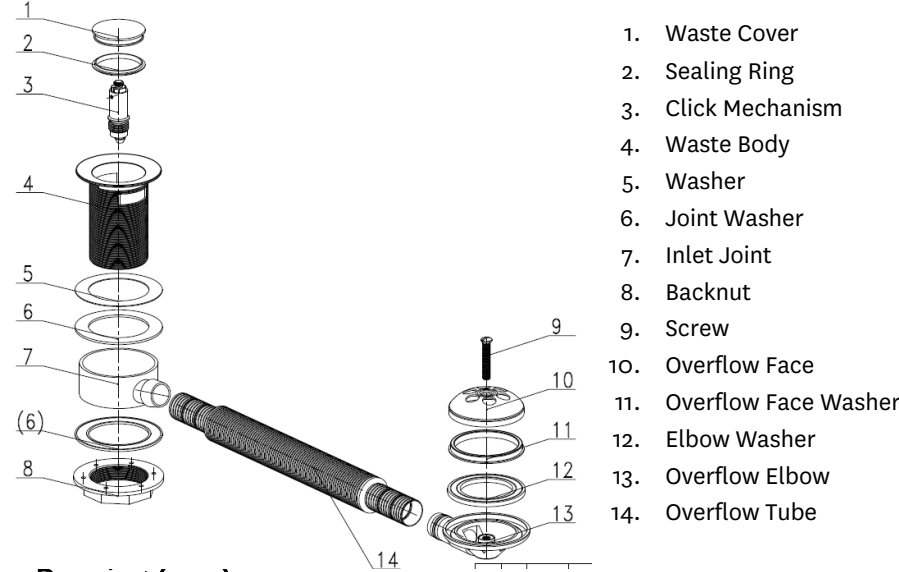

Line Drawing (mm)

