

Technical Data Sheet

TAVISTOCK

Cohort Lever 3 Tap Hole Basin Mixer with Click Waste

TCL79 (Chrome), TCL7904 (Brushed Brass), TCL7905 (Gunmetal)


FLOW RATE DATA IS TESTED UNDER
LABORATORY CONDITIONS: ACTUAL
FLOW RATE MAY VARY DEPENDING ON
DOMESTIC SUPPLY AND ACCESSORIES



Minimum Pressure:	0.5 BAR
Pressure:	Flow Rate (l/min)
0.5 BAR	4.2
1 BAR	5.33
2 BAR	7.7
3 BAR	9.56

Dimensions

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

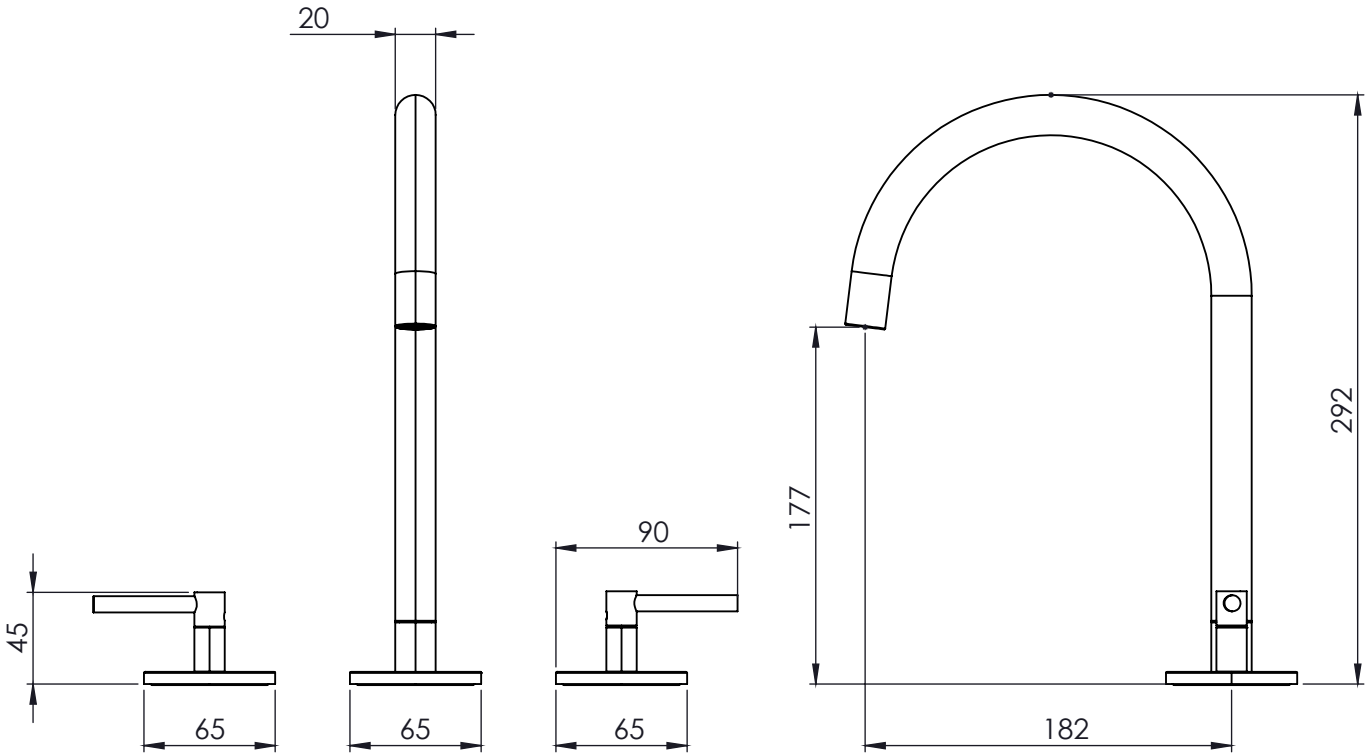

FAQs

- What connections do the flexible hoses have?** This tap uses flexible hoses with 1/2" BSP captive nut connections.
- What size Pipework do i need?** It is recommended to use 15mm with G1/2" plumbing fittings.
- What is the recomendated operating pressure?** 0.5 BAR.
- Can the spout on this product swivel?** Yes, the spout can rotate fully after installation.
- How do I care for the finish on this tap?** We recommend using only a damp cloth and warm water. Do NOT use abrasive cleaning products or cleaning chemicals as this may damage the surface of the product.
- Can the hot and cold valves be swapped to change the handle rotation direction?** Yes.