

Technical Data Sheet

TAVISTOCK

Cohort Lever Wall Mounted Mixer

TCL19 (Chrome), TCL1904 (Brushed Brass), TCL1905 (Gunmetal)


FLOW RATE DATA IS TESTED UNDER
LABORATORY CONDITIONS: ACTUAL
FLOW RATE MAY VARY DEPENDING ON
DOMESTIC SUPPLY AND ACCESSORIES



Minimum Pressure:	0.5 BAR (BM) / 1BAR (BF)
Pressure:	Flow Rate (l/min)
0.5 BAR	10.28
1 BAR	11.42
2 BAR	13.93
3 BAR	16

Dimensions

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

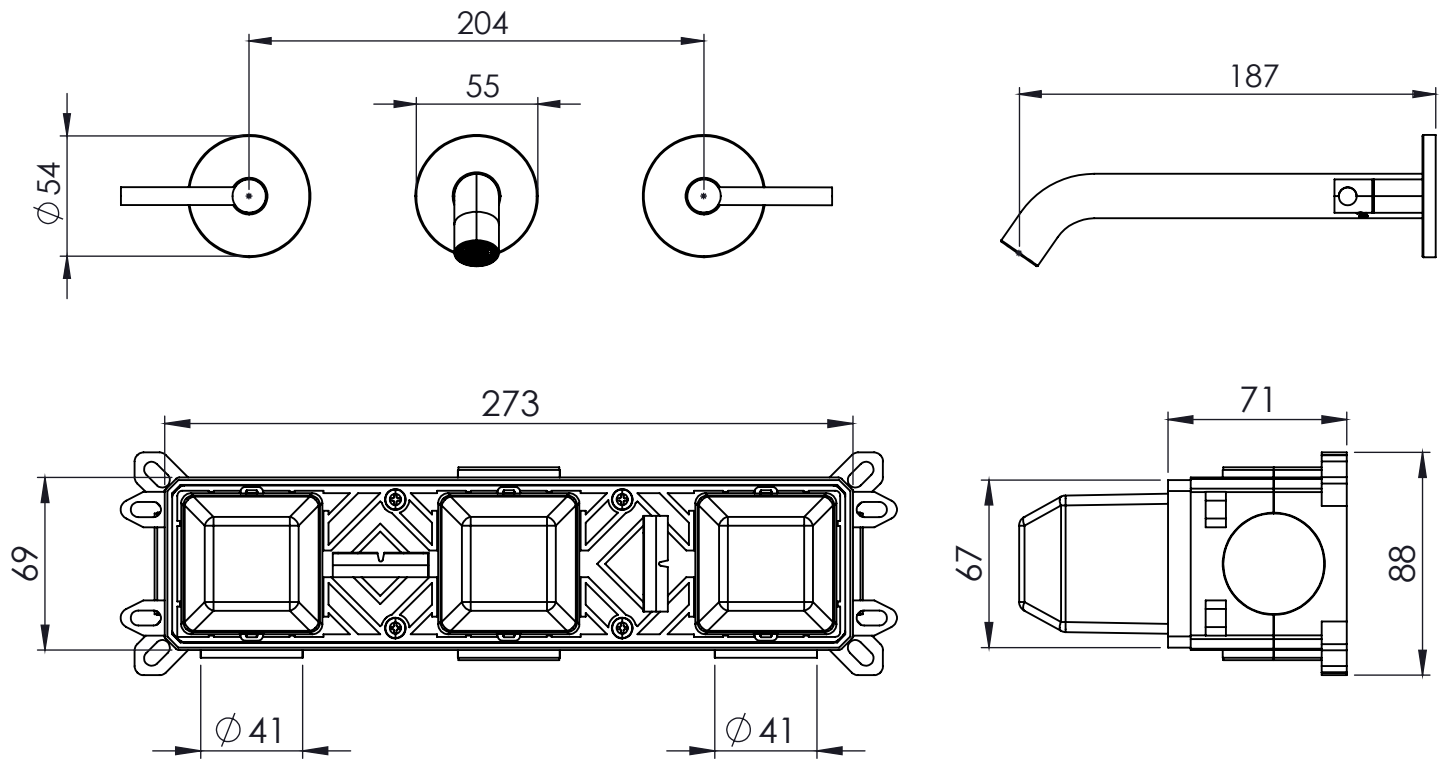

FAQs

- What size are the connections?** This tap uses 1/2" BSP threaded inlets.
- What are the minimum and maximum cavity depth that this product is intended for?** Min: XXmm - Max: XXmm
- What size pipework do i need?** It is recommended to use 15mm pipework with G1/2" plumbing fittings.
- What is the recommended operating pressure?** 0.5 BAR.
- How do I care for the finish on this tap?** We recommend using only a damp cloth and warm water. Do NOT use abrasive cleaning products or cleaning chemicals as this may damage the surface of the product.
- Can the hot and cold valves be swapped to change the handle rotation direction?** Yes.