


Technical Data Sheet

TAVISTOCK

Cohort Cross Bath Shower Mixer

TCC42 (Chrome), TCC4204 (Brushed Brass), TCC4205 (Gunmetal)


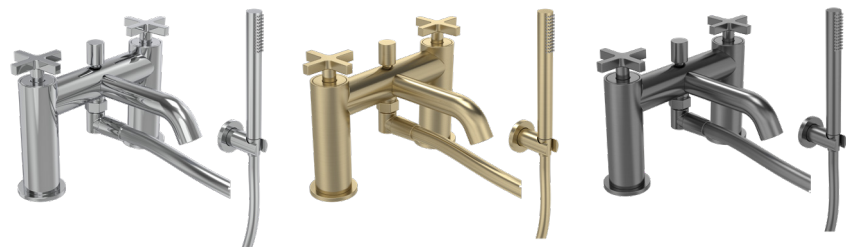


FLOW RATE DATA IS TESTED UNDER
LABORATORY CONDITIONS: ACTUAL
FLOW RATE MAY VARY DEPENDING ON
DOMESTIC SUPPLY AND ACCESSORIES

Minimum Pressure:	0.5 BAR
Pressure:	Flow Rate (l/min)
0.5 BAR	12
1 BAR	15.79
2 BAR	22.73
3 BAR	28

Dimensions

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

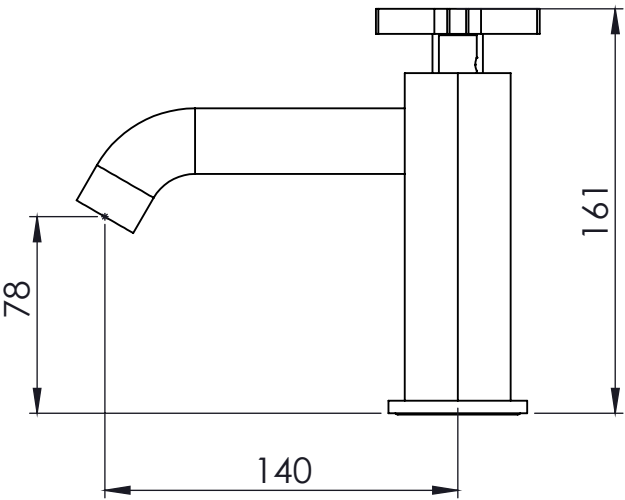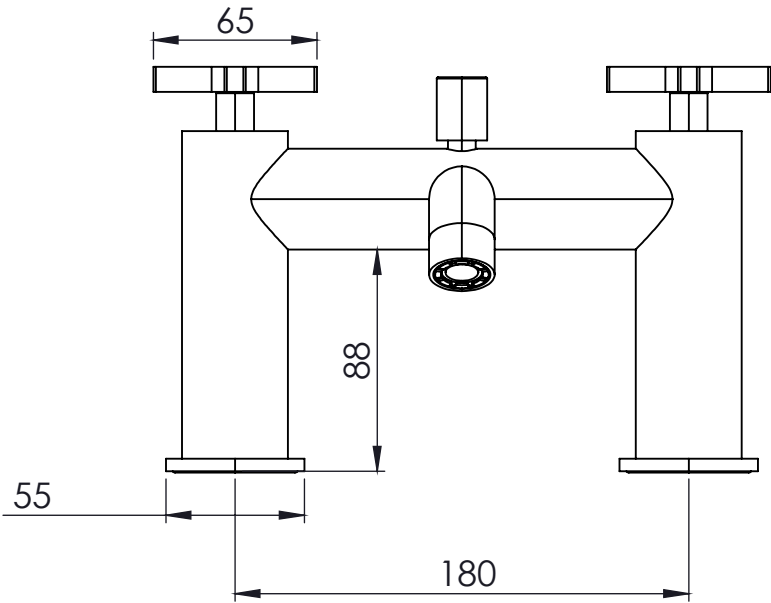

FAQs

- What size are the connections?** This tap uses 3/4" BSP threaded inlets. The shower outlet is 1/2" BSP.
- What size pipework do i need?** It is recommended to use 22mm pipework with G3/4" plumbing fittings.
- What is the recommended operating pressure?** 0.5 BAR.
- How do I care for the finish on this tap?** We recommend using only a damp cloth and warm water. Do NOT use abrasive cleaning products or cleaning chemicals as this may damage the surface of the product.