

Technical Datasheet

Oxygen Mirrors



Box Contents

Oxygen Mirror | Fixing Kit | Instructions booklet

FAQ

	Units	XGM60C-XX	XGM80C-XX	XGM50P-XX	XGM60P-XX	XGM50A-XX	XGM60A-XX	XGM80D-XX	XGM45T-XX
Can the mirror be hung landscape?	-	N/A		No					
What is the thickness of the mirror glass?	mm	4							
What size fuse should I use?	-	Seek the advice of an electrician							
Where is the switch sensor located?	-	Front Centre							
Can the LED lighting be replaced?	-	No							
Can the switch sensor be replaced?	-	Yes							
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.							
Are illuminated mirrors supplied with mains cable?	-	All illuminated cabinets/mirrors are supplied with a removeable 500mm mains cable.							
Why are the lights not switching on?	-	Please note: After the mirror is connected to power for the first time, it may take up to 5 minutes for the sensor to calibrate and become fully responsive.							

Technical Datasheet

Oxygen Mirrors

Electrical Specification

Product Code	Input Voltage	Lamp Type	Total Wattage (LED & Demist)	Demist (W)	Demist Size (mm)	LEDs (W)	LED (lm)	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class
XGM60C-XX	220-240V 50Hz	12V DC LED Lamp	32.6	11.0	200*250	21.6	1950	F	3000-6500	80	IP44	Class II
XGM80C-XX	220-240V 50Hz	12V DC LED Lamp	48.4	23.1	300*350	25.3	2730	F	3000-6500	80	IP44	Class II
XGM50P-XX	220-240V 50Hz	12V DC LED Lamp	34.8	13.2	200*300	21.6	2262	F	3000-6500	80	IP44	Class II
XGM60P-XX	220-240V 50Hz	12V DC LED Lamp	41.15	19.25	250*350	21.9	2484	F	3000-6500	90	IP44	Class II
XGM50A-XX	220-240V 50Hz	12V DC LED Lamp	41.75	19.25	250*350	22.5	2556	F	3000-6500	90	IP44	Class II
XGM60A-XX	220-240V 50Hz	12V DC LED Lamp	50.2	26.4	300*400	23.8	2700	F	3000-6500	90	IP44	Class II
XGM80D-XX	220-240V 50Hz	12V DC LED Lamp	40.7	19.8	300*300	20.9	2376	F	3000-6500	90	IP44	Class II
XGM45T-XX	220-240V 50Hz	12V DC LED Lamp	29.7	11	250*200	18.7	2124	E	3000-6500	90	IP44	Class II

Please note:

- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.
- The LED (lm) values represent the output of the LED. Actual product level Lumen output may vary depending on the diffuser material i.e., glass or acrylic.


MATERIALS

4mm Glass, PVC Backed


Aluminium Frame

Technical Datasheet


XGM60C-XX

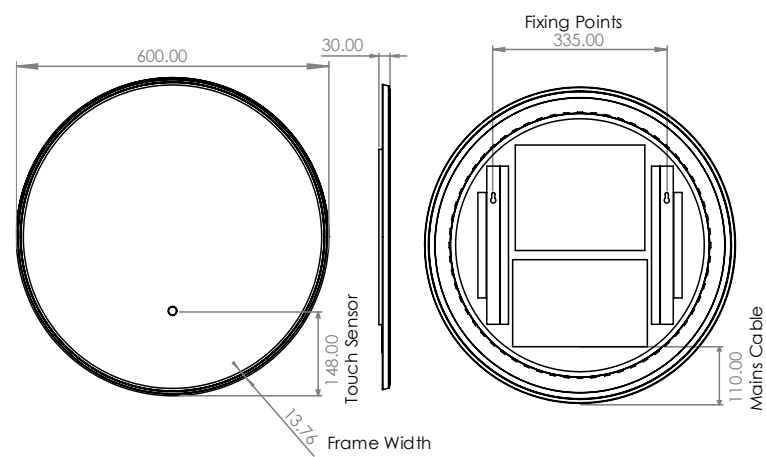


XGM80C-XX

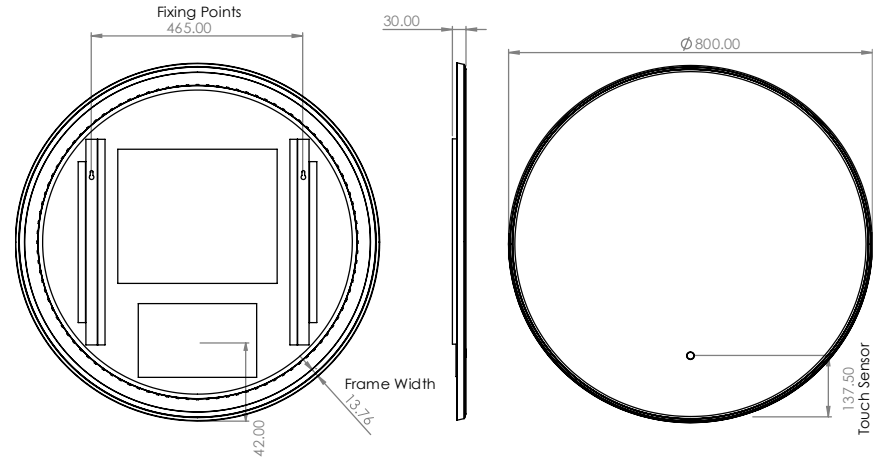

XGM50P-XX

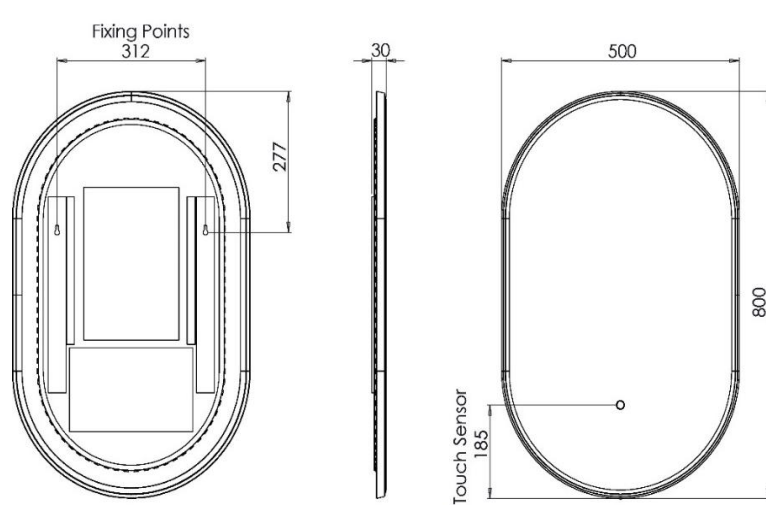


XGM60P-XX

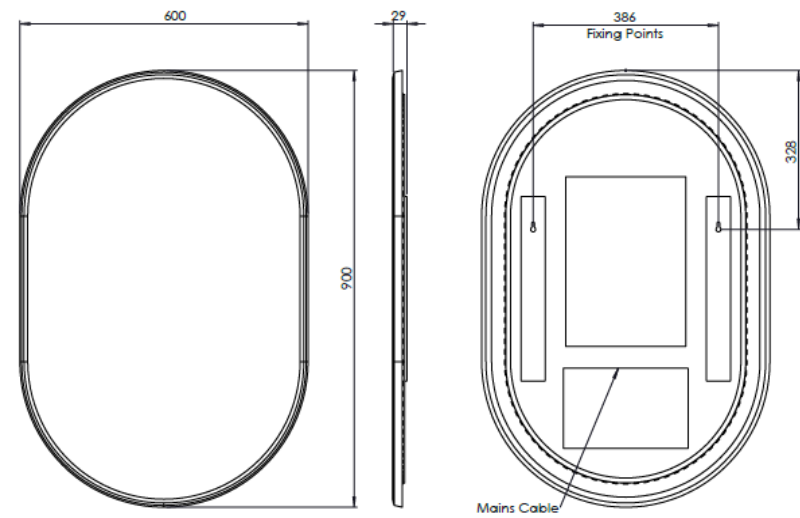


Technical Datasheet


XGM50A-XX

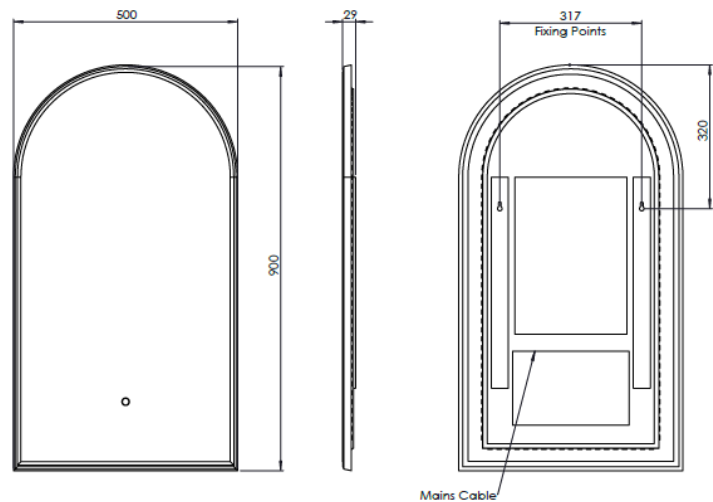

XGM60A-XX

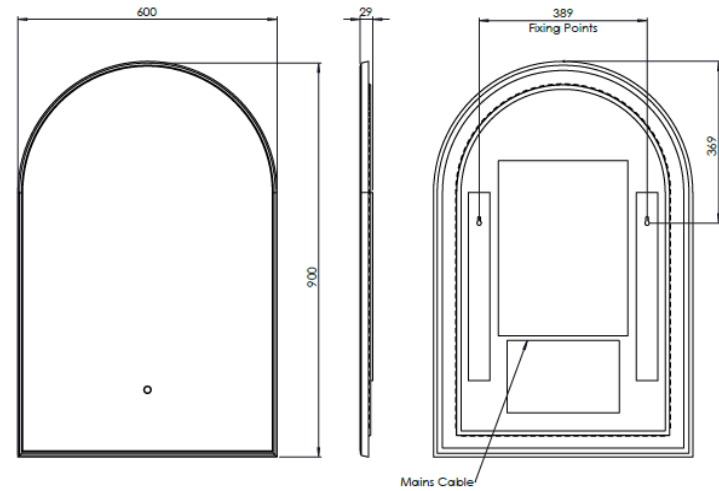

XGM80D-XX

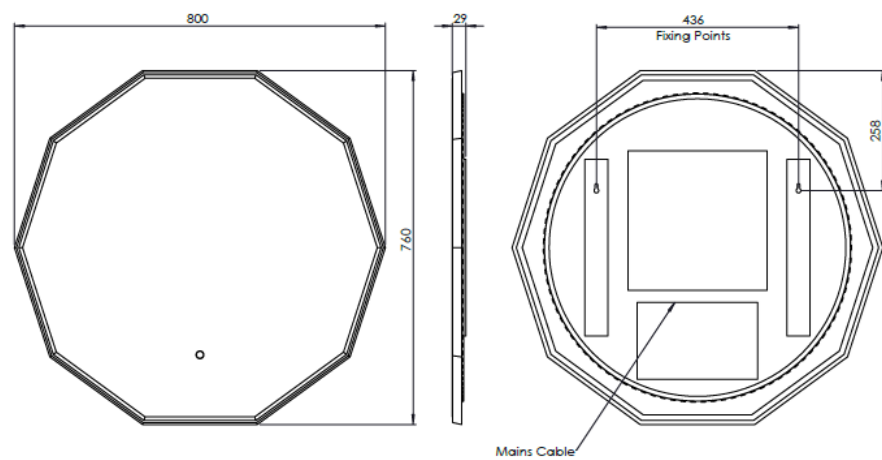

XGM45T-XX

