

Technical Datasheet

Portal Mirrors

TAVISTOCK

Box Contents:

Portal Mirror | Fixing Kit | Instructions booklet

FAQ

	Units	PTM050	PTM060	PTM100	PTM60C	PTM80C	PTM50G	PTM60G	PTM50P	PTM40P
Can the mirror be hung landscape?	-	Yes			NA		No			
What is the thickness of the mirror glass?	mm	4								
What size fuse should I use?	-	Seek the advice of an electrician								
Where is the switch sensor located?	-	Bottom Centre (Portrait) Right (Landscape)	Left (Portrait) Right (Landscape)		Bottom Centre					
Can the LED lighting be replaced?	-	No								
Can the switch sensor be replaced?	-	Yes								
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.								
Are illuminated mirrors supplied with mains cable?	-	All illuminated cabinets/mirrors are supplied with a removeable 500mm mains cable.								
Why are the lights not switching on?	-	Please note: After the mirror is connected to power for the first time, it may take up to 5 minutes for the sensor to calibrate and become fully responsive.								
Are illuminated mirrors supplied with mains cable?	-	All illuminated cabinets/mirrors are supplied with a removeable 500mm mains cable.								
Why are the lights not switching on?	-	Please note: After the mirror is connected to power for the first time, it may take up to 5 minutes for the sensor to calibrate and become fully responsive.								

Technical Datasheet

Portal Mirrors

Electrical Specification

Product Code	Input Voltage	Lamp Type	Total Wattage (LED & Demist)	Demist (W)	Demist Size (mm)	LEDs (W)	LED (lm)	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class
PTM050	220-240V 50Hz	24V DC LED Lamp	34	13	250*250	17	950	E	3000 - 6500	80	IP44	Class II
PTM060	220-240V 50Hz	24V DC LED Lamp	44	20	350*300	20	1125	E	3000 - 6500	80	IP44	Class II
PTM100	220-240V 50Hz	24V DC LED Lamp	41	17	350*250	20	1175	E	3000 - 6500	80	IP44	Class II
PTM60C	220-240V 50Hz	24V DC LED Lamp	30	10	250*200	15	1700	E	3000 - 6500	80	IP44	Class II
PTM80C	220-240V 50Hz	24V DC LED Lamp	47	23	400*300	20	2350	E	3000 - 6500	80	IP44	Class II
PTM50G	220-240V 50Hz	24V DC LED Lamp	38	17	350*250	18	2000	E	3000 - 6500	80	IP44	Class II
PTM60G	220-240V 50Hz	24V DC LED Lamp	48	23	300*400	21	2350	E	3000 - 6500	80	IP44	Class II
PTM50P	220-240V 50Hz	24V DC LED Lamp	34	14	200*350	18	2000	E	3000 - 6500	80	IP44	Class II
PTM40P	220-240V 50Hz	24V DC LED Lamp	31	11	150*350	17	1900	E	3000 - 6500	80	IP44	Class II

Please note:

- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.
- The LED (lm) values represent the output of the LED. Actual product level Lumen output may vary depending on the diffuser material i.e., glass or acrylic.

MATERIALS


4mm Glass, PVC Backed

Aluminium LED Channel


Silicon Diffuser

Technical Datasheet


PTM050

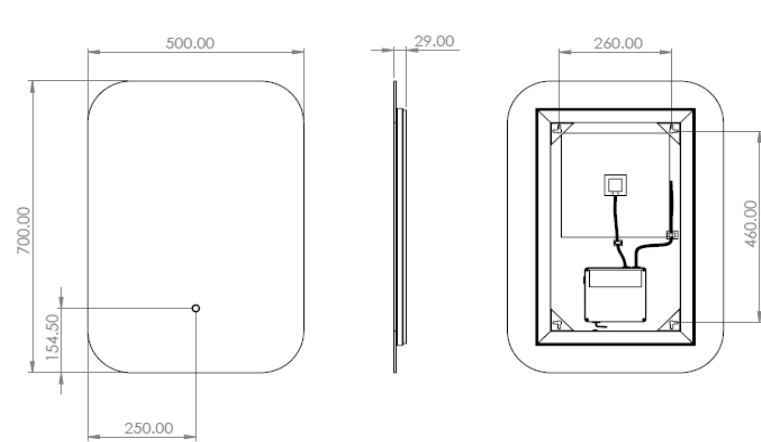

PTM060

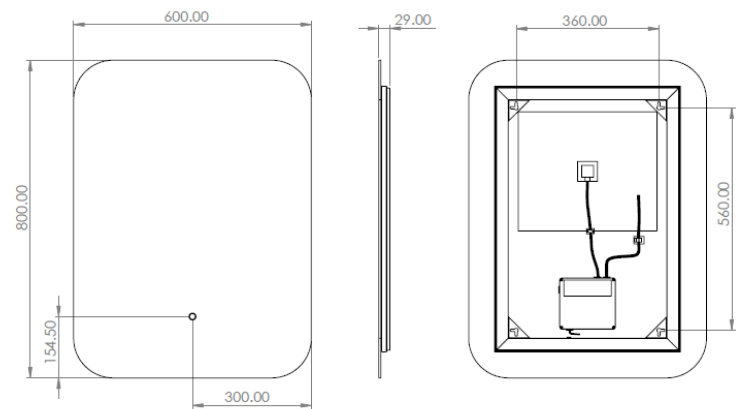


PTM100

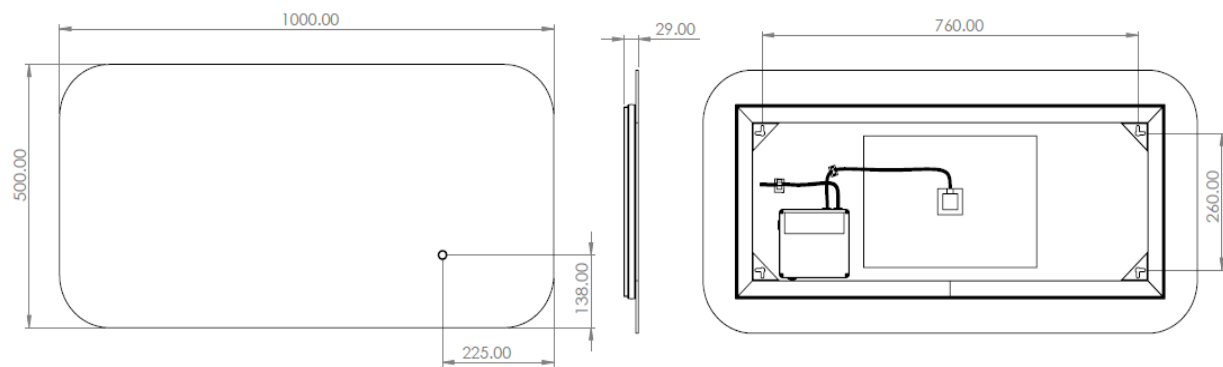


Technical Datasheet


PTM60C

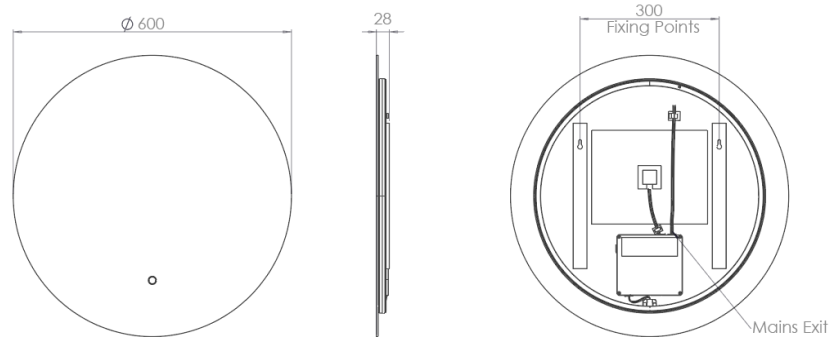


PTM80C

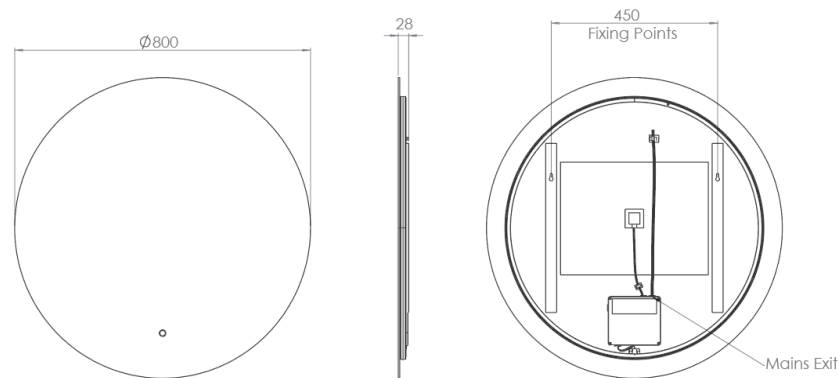

PTM50G

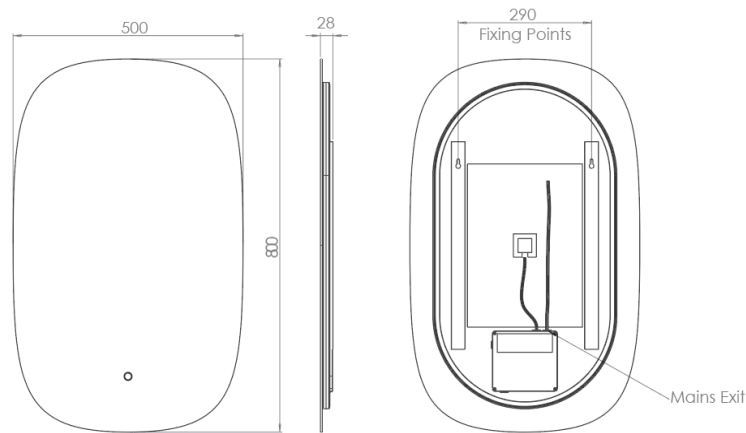


PTM60G

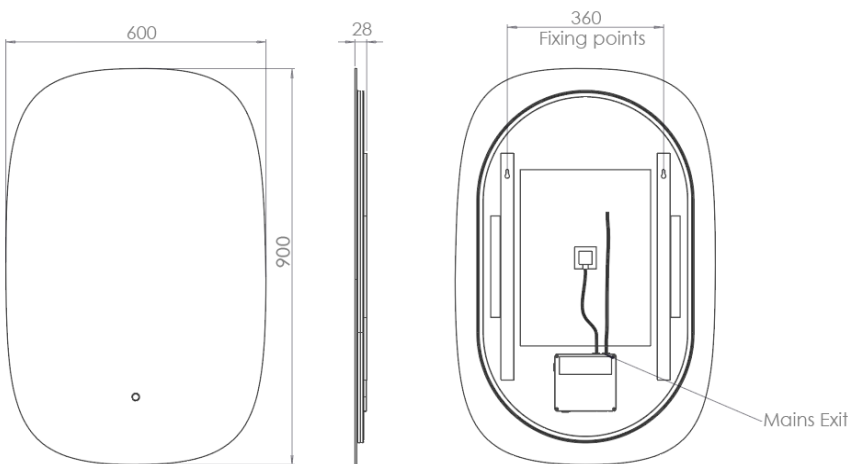

Technical Datasheet

PTM50P

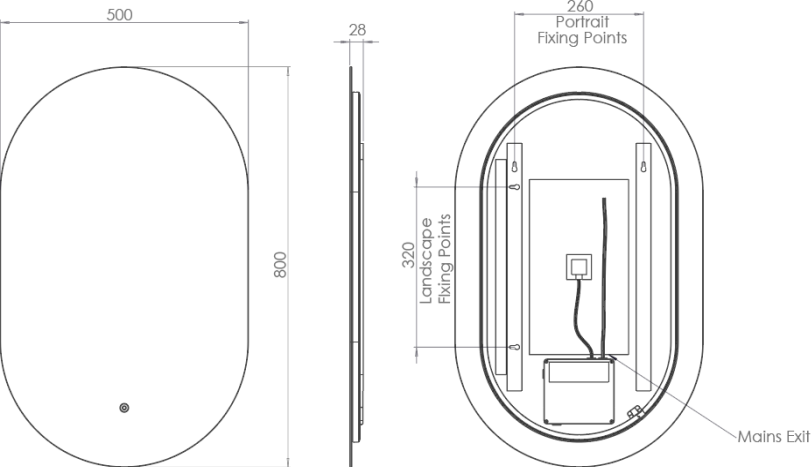

PTM40P

