

Technical Data Sheet

Cohort Dual Function Bar Valve Shower System

SCL1511 (Stainless Steel)

TAVISTOCK




FLOW RATE DATA IS TESTED UNDER
LABORATORY CONDITIONS: ACTUAL
FLOW RATE MAY VARY DEPENDING ON
DOMESTIC SUPPLY AND ACCESSORIES

Minimum Pressure:	1 BAR
Pressure:	Flow Rate (l/min)
1 BAR	7.6
2 BAR	11.31
3 BAR	14.18
4 BAR	16.58

Dimensions

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

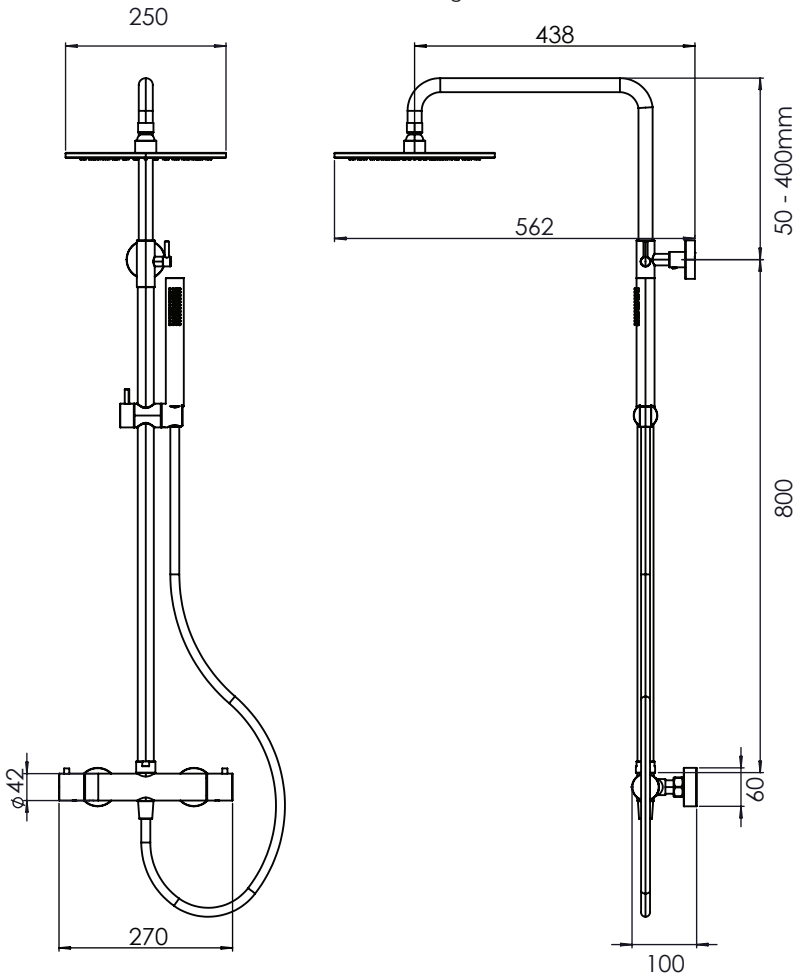

FAQs

- What connections does this bar valve use?** This bar valve is supplied with a quick fixing kit and cranked elbow connections
- Can I have both shower options on at the same time?** No, only one function can be selected at any one time
- What size pipework do I need?** We recommend using 15mm pipework for this shower system
- What is the minimum recommended operating pressure?** 1.0bar