


QuietAir QT120

Toilet, bathroom, utility room and kitchen (adjacent to hob) ventilation



KEY FEATURES

- Two speed ventilation up to 47 l/s (170 m³/h)
- Awarded Quiet Mark by Noise Abatement Society
- Low power consumption – 10 W
- Interval timer for routine auto extraction
- Long-life ball bearings with approx. 40,000 hr life
- Suitable for installation anywhere in Zone 1 of bathrooms when installed with an RCD
- Install in a kitchen adjacent to the hob
- 3 year warranty

Designed and engineered in Germany, the QuietAir range features high-efficiency, low-energy, and ultra-quiet performance. With a variety of controls and features, there is a perfect solution for every application. The simple and compact design will fit perfectly with your decor.

This elegant, discreet axial fan range includes various control options that activate the fan only when needed - remote switching, timer, humidity timer, and motion sensor with timer. By using exceptionally low energy, it helps reduce carbon emissions and save on energy bills.

Room refresh (interval timer) enables automatic extraction at pre-set times if required.

MODELS


Basic	Control by remote switch
Timer	Features a 6-21 minute overrun and automatic room refresh at 8, 12 or 24 hour intervals
Humidity Timer	Adjustable Humidity 60 to 90% RH with adjustable timer
Motion Sensor Timer	Motion sensor activation



TECHNICAL DATA


Specification	QuietAir QT120B	QuietAir QT120T	QuietAir QT120HT	QuietAir QT120MST
Air flow m³/h	150 / 170			
Air flow l/s	42 / 47			
Fan type	Axial			
Controls	Basic	Timer	Humidity Timer	Motion Sensor Timer
Mounting	Wall / Ceiling			
Sound pressure dB(A)@3 m	32 / 36			
Delay start (min)	No	0, 45, 90, 120 sec's	2	No
Adjustable timer (min)	No	6, 10, 15, 21	6, 10, 15, 21	15
Adjustable humidity (%RH)	-	-	60 - 90	-
Interval timer, auto start (hrs)	-	0, 8, 12, 24	-	-
Power watts	10 / 13			
Amps	0.08 / 0.09			
Specific Fan Power (SFP)	0.24			
Building Regulations ADF	Yes			
Duct Diameter (mm)	120 to 125			
Voltage	230 V / 1 ph / 50 Hz			
Rating	IP45			
Max ambient temperature	40°C			
Weight (kg)	1.05			
Dimensions (H x W x D) mm	176 x 176 x 155			
Part No.	9041497	9041498	9041499	9041500
EAN Barcode	5019009307589	5019009307596	5019009307602	5019009307619

DIMENSIONS (mm)

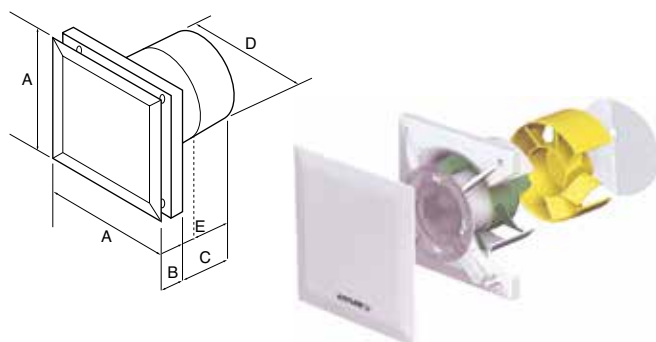

Model	A	B	C	D	E
QuietAir QT120	176	39	116	118	70

PERFORMANCE

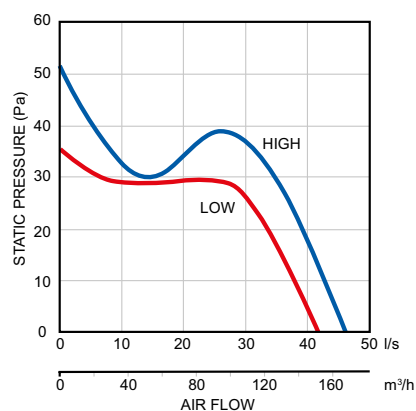

CONTROLS & ACCESSORIES



Others products available from airflow.com

Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80001415 - Issue 6 08/26