

HERITAGE

BATHROOMS

Installation Guide



Models Covered:

NEWICK

AMBERLEY

KINGSTON

STANMER

Please keep this booklet for future reference.

Installer: When you have read these instructions, please ensure you leave them with the user.

INTRODUCTION

Thank you for buying a Heritage Product. When you buy a Heritage product, you can be confident that it not only features a beautiful, distinctive, classic design, but that it has also been made to the very highest quality standards.

To ensure that it works to its full potential, it needs to be fitted correctly.

These fitting instructions have been created to give you all of the information you need and, if you need any further help, please do not hesitate to give us a call on: **0330 026 8503**.

CONTENTS

SAFETY NOTES	3
PRODUCT INFORMATION	4
DIMENSIONS	5 - 6
INSTALLATION REQUIREMENTS	7
PRE-INSTALLATION	8
INSTALLATION	9 - 11
OPERATION	12
CARING FOR YOUR PRODUCT	13
GUARANTEE	13
DISPOSAL & RECYCLING	14
NOTES	15



These products contain a light source of energy efficiency class F.



SAFETY NOTES

Please make sure you read these instructions and retain for future use.

All products manufactured by Heritage Bathrooms are safe, providing they are installed and used correctly and also receive maintenance when needed. These instructions are for your guidance for a safe and successful installation, which we recommend is carried out by a suitably qualified person and must conform with current I.E.E Wiring Regulations and relevant Building Regulations.

Before installation, ensure the domestic electrical mains supply to which the mirror is to be connected is turned off.

This product must not be modified in any way otherwise this will invalidate the guarantee.

Consider the following whilst using power tools:




Prior to drilling into walls, check there are no hidden electrical cables or wires and there are also no water pipes. These can potentially be found using an electrical or metal detector. You may also need to know some of the schematics of previous installations to determine the suitability and accommodation of the installation.

Wear the correct PPE, especially ear, eye and hand protection when using power tools. Unplug any mains equipment after use.

Keep electrical equipment away from sources of water.

This product must not be modified in any way as this will invalidate the guarantee.

TOOLS REQUIRED

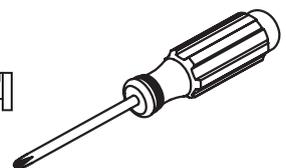

PRODUCT INFORMATION

AMBERLEY CIRCULAR DESIGN (with hanging strap) - 800mm Chrome/Black

- Total Power 45w
- Input AC220 - 240v - 50/60Hz
- 0.9m Power Cable
- Demister Pad
- 1 x Wall Hook and Bracket
- 3 x Wall Plugs and Screws. 2 x Strap Screws

AMBERLEY CIRCULAR DESIGN (with hanging strap) - 590mm Chrome/Black

- Total Power 24w
- Input AC220 - 240v - 50/60Hz
- 0.9m Power Cable
- Demister Pad
- 1 x Wall Hook and Bracket
- 3 x Wall Plugs and Screws. 2 x Strap Screws

NEWICK CIRCULAR DESIGN - 590mm Chrome/Black

- Total Power 24w
- Input AC220 - 240v - 50/60Hz
- 0.9m Power Cable
- Demister Pad
- 2 x Fixings Plates
- 2 x Wall Plugs and Screws

NEWICK CIRCULAR DESIGN - 800mm Chrome/Black

- Total Power 45w
- Input AC220 - 240v - 50/60Hz
- 0.9m Power Cable
- Demister Pad
- 2 x Fixings Plates
- 2 x Wall Plugs and Screws

KINGSTON RECTANGLE MIRROR - 600mm x 800mm Chrome/Vintage Gold/Black

- Total Power 45w
- Input AC220 - 240v - 50/60Hz
- 0.9m Power Cable
- Demister Pad
- 4 x Fixing Plates (2 x Landscape & 2 x Portrait)
- 2 x Wall Plugs and Screws

KINGSTON RECTANGLE MIRROR - 400mm x 800mm Chrome/Vintage Gold/Black

- Total Power 35w
- Input AC220 - 240v - 50/60Hz
- 0.9m Power Cable
- Demister Pad
- 4 x Fixing Plates (2 x Landscape & 2 x Portrait)
- 2 x Wall Plugs and Screws





STANMER CURVED DESIGN - 600mm x 800 mm

- Total Power 45w
- Input AC220 - 240v - 50/60Hz
- 0.9m Power Cable
- Demister Pad
- 4 x Fixing Plates (2 x Landscape & 2 x Portrait)
- 2 x Wall Plugs and Screws




NOTE: The light & power source for these products are non-replaceable.



DIMENSIONS

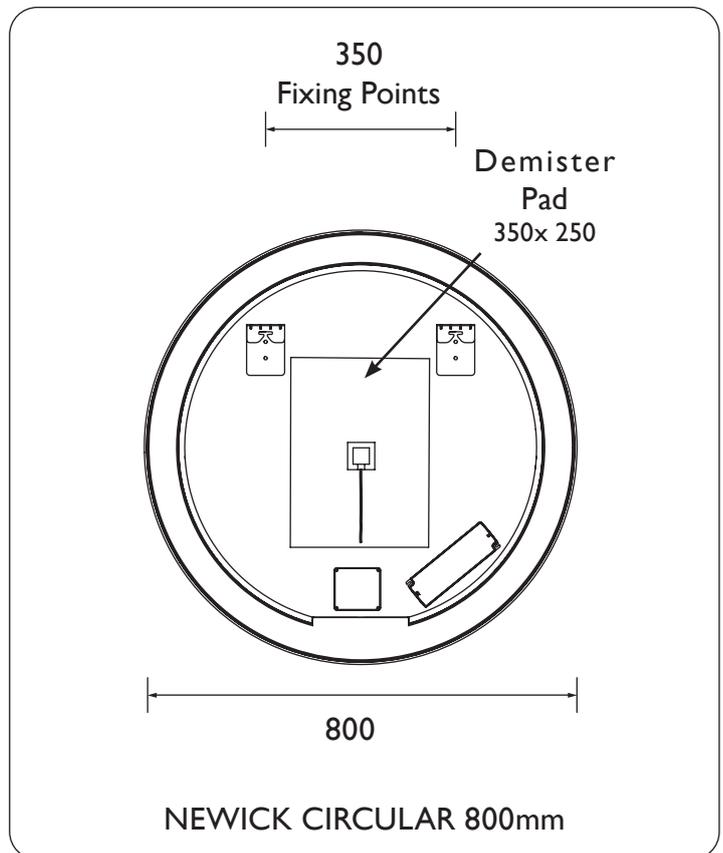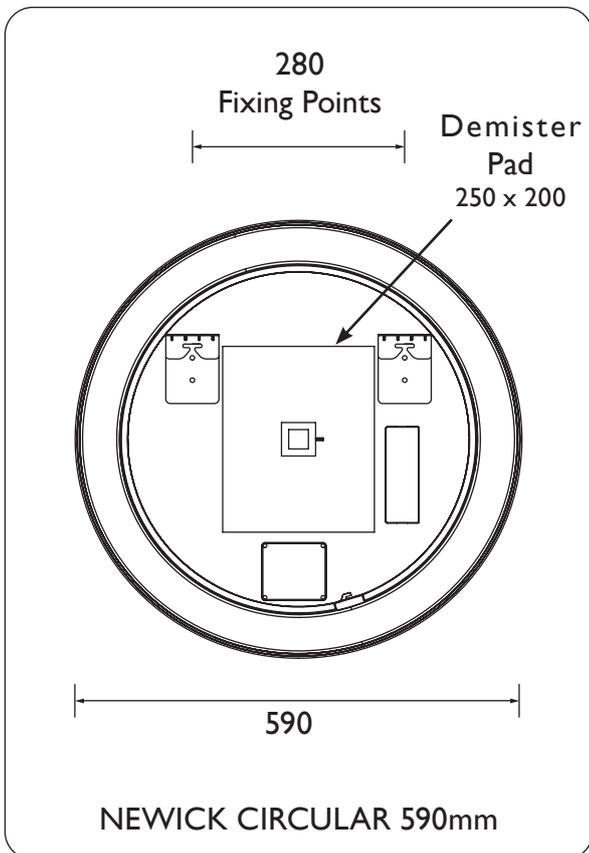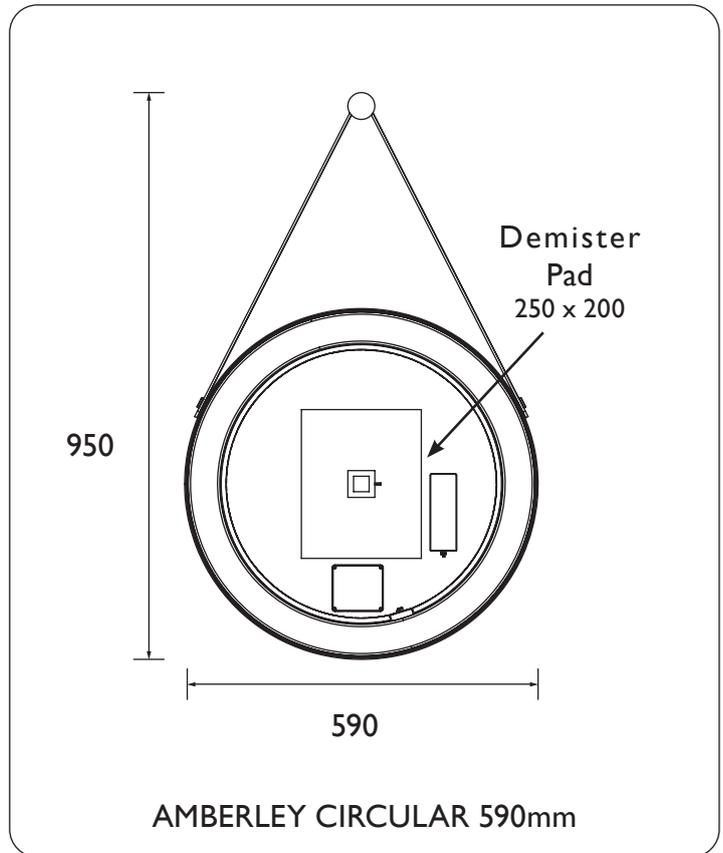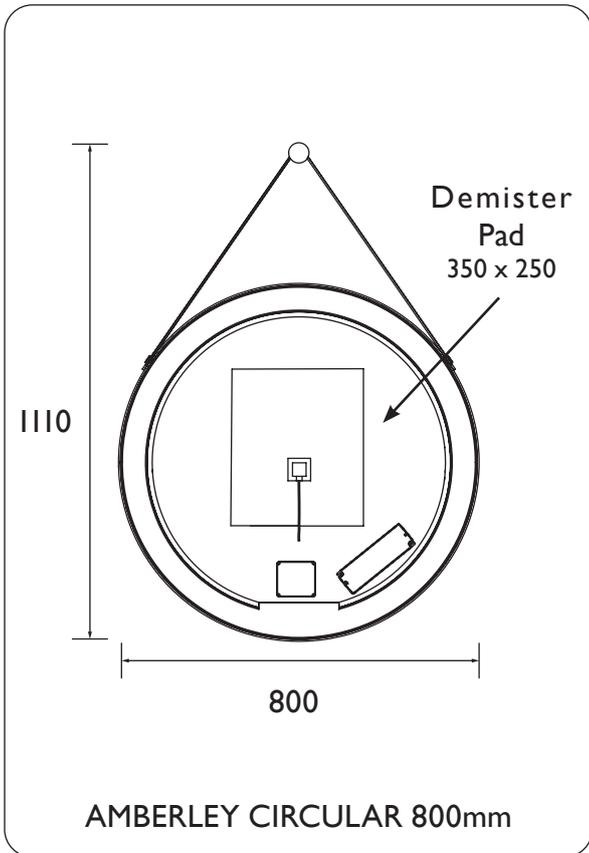

DIMENSIONS

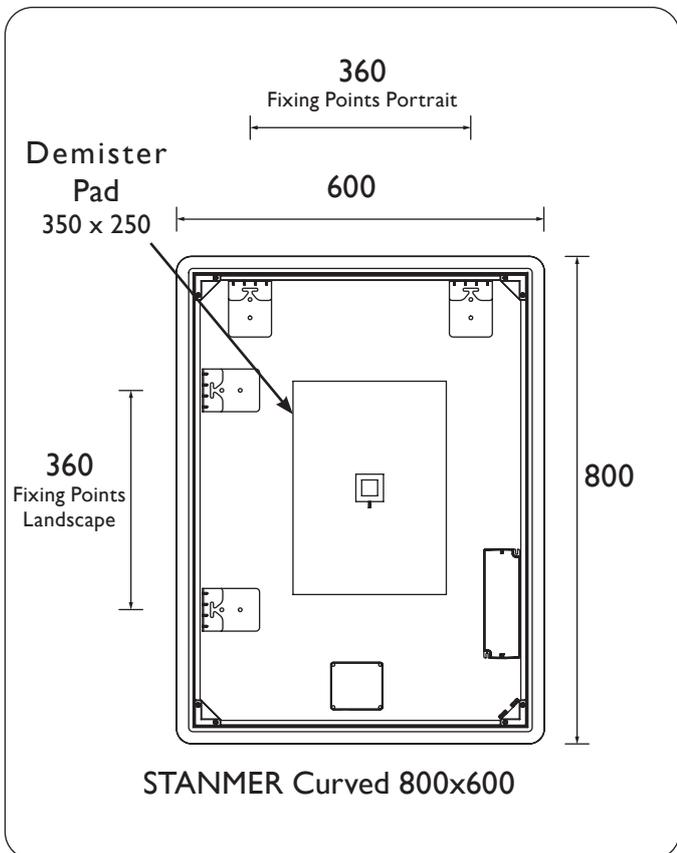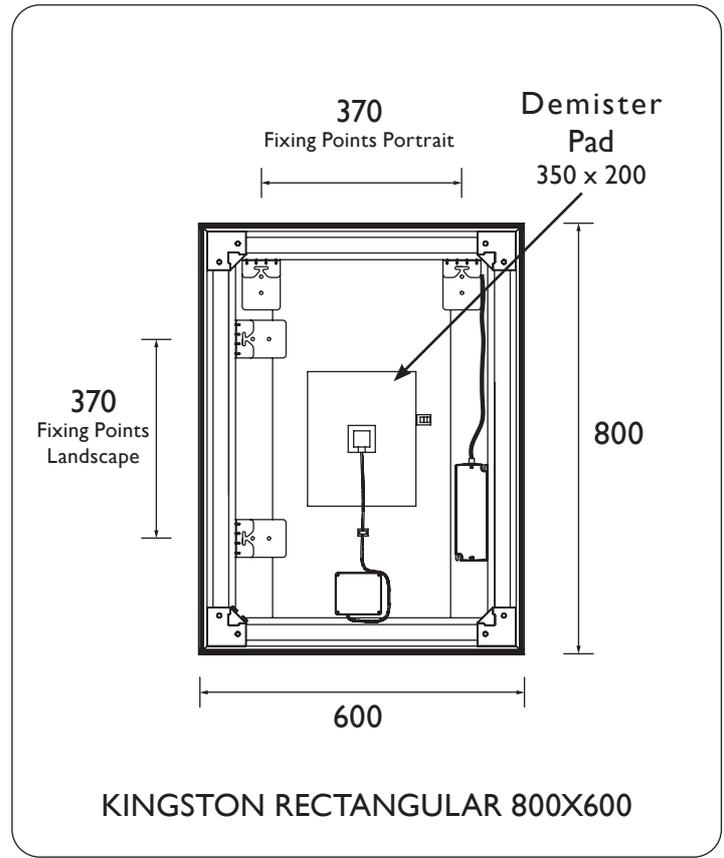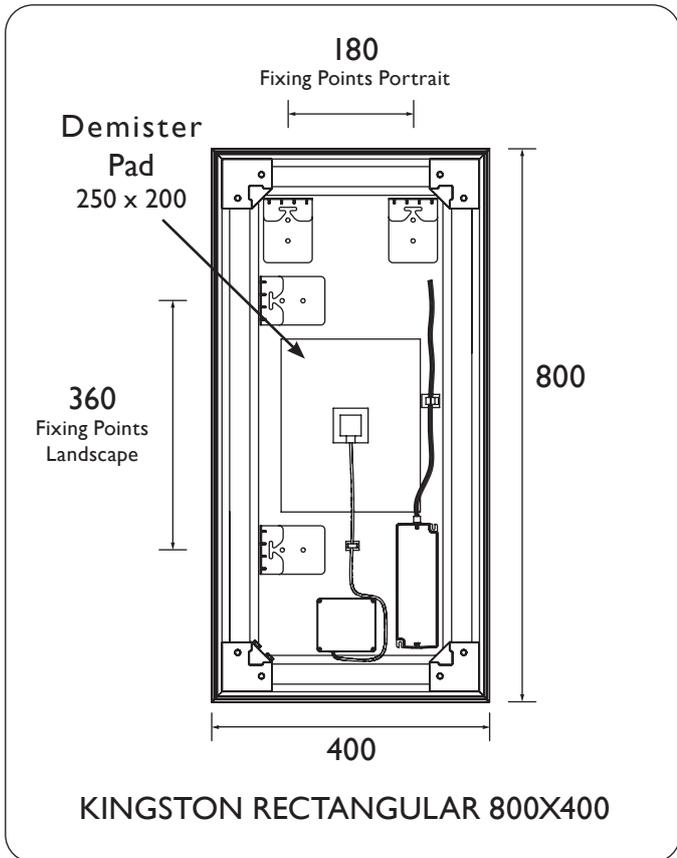

HANDLE WITH CARE!

When unpacked, never place mirror on a hard surface eg. tile floor. Always lay your mirror on a soft surface



INSTALLATION REQUIREMENTS

Electrical Connections

Regulations: The electrical installation must be carried out in accordance with the national electrical regulations and installed by a qualified person.

Before starting work on the electrical supply ensure the power supply is isolated.

DO NOT allow the supply cord to contact hot surfaces. The cord should be safely routed and secured by cable clips.

Connections: The power supply box must be permanently connected to the fixed wiring of the mains supply using the factory fitted supply cord, via a switched fused spur off the ring main.

The wires in the mains lead are coloured in accordance with the following code:

Blue: Neutral


Brown: Live

As the colours of the wires in the mains lead of this product may not correspond with the coloured markings identifying the terminals in your connection unit, proceed as follows:-


The wire which is coloured blue must be connected to the terminal which is marked with the letter 'N' or is coloured black.

The wire which is coloured brown must be connected to the terminal which is marked with the letter 'L' or is coloured red.

Fuse: The following fuse size should be used

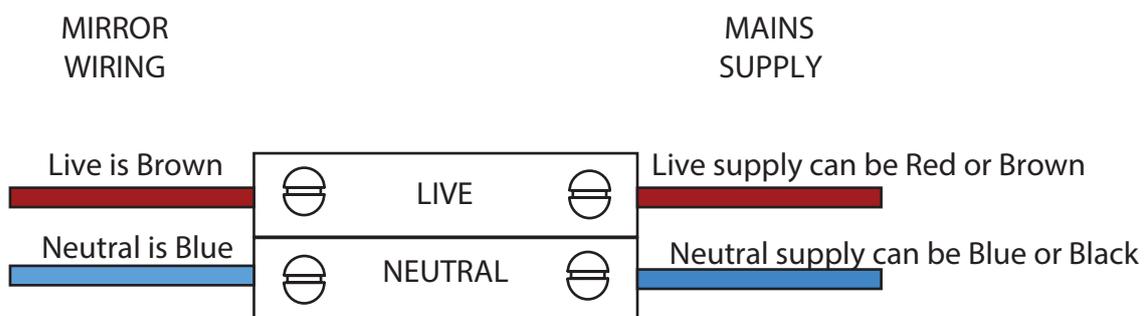

PRE-INSTALLATION

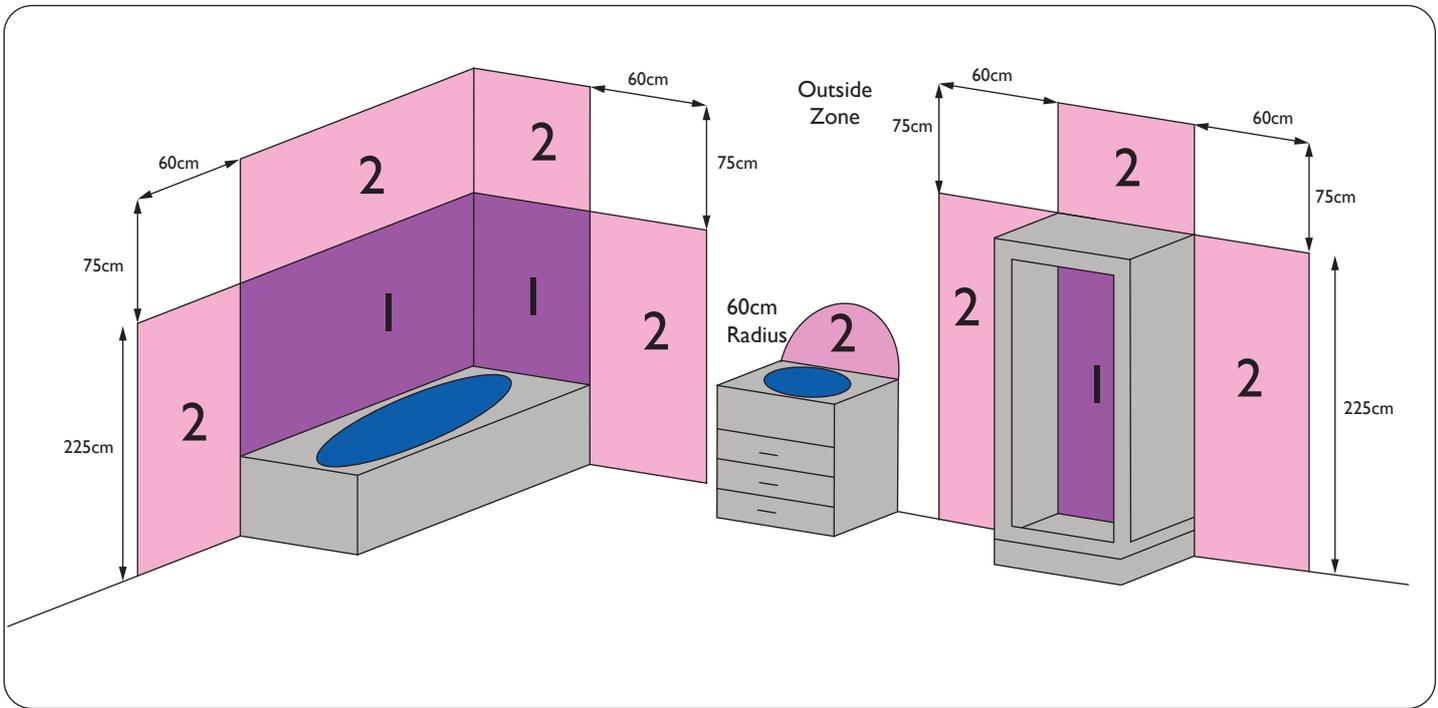

We recommend that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician.

This product is IP44 rated and is suitable for installation within zone 2 and outside zone


All installations must comply with guidelines which are based on a zonal concept. The diagram above illustrates this concept and must be followed to ensure the safe installation of electrical appliances in the bathroom. These regulations apply to domestic installations only. Installations must be made in accordance with current IEE wiring regulations and relevant building regulations.




INSTALLATION

KINGSTON & STANMER


*Portrait hanging position shown in this image.

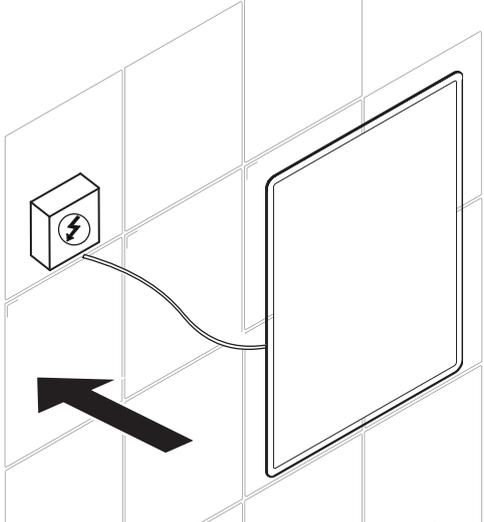

Using the brackets on the reverse of the mirror, offer up the mirror to the desired position. Ensure the mirror power cable is within reach of the connection to the power supply box (not supplied) from the electrical mains.

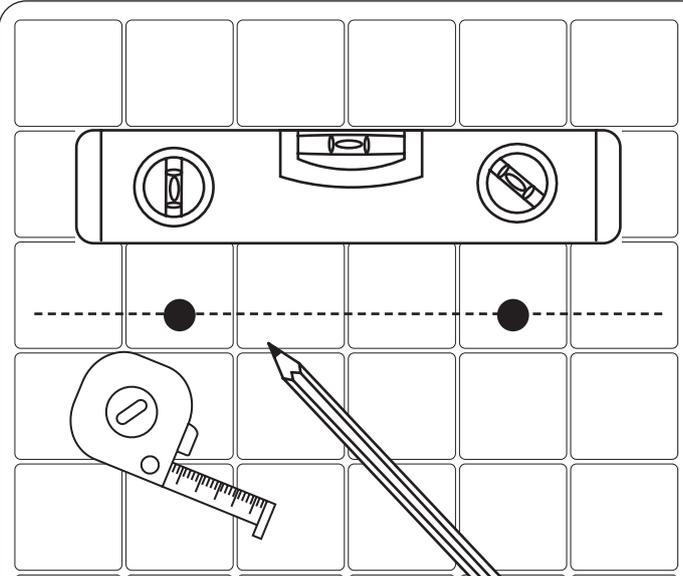


Carefully mark the fixing points using a tape measure, a pencil and spirit level, using the dimensions given on page 6 and the brackets on the reverse of the mirror as a guide. **Please ensure that all marked mounting points accurately match up with the fixing points on the mirror**

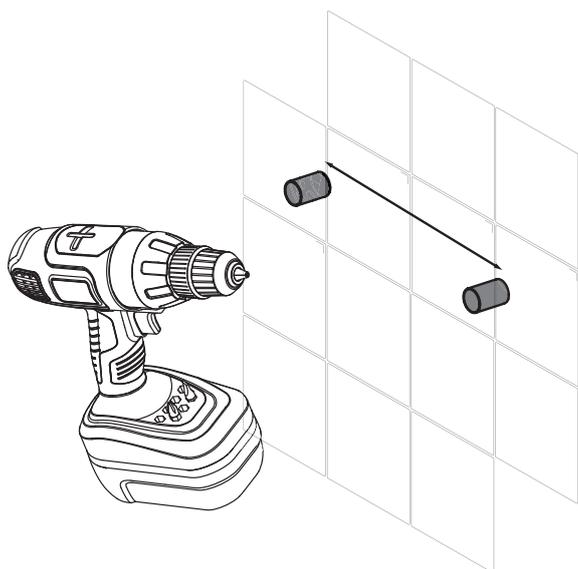

Using a suitable drill bit, drill holes in the marked positions to fit the wall plugs and screws provided. **If drilling through tile, use a ceramic drill bit. NB For plasterboard walls, specialist fixings should be purchased**

*Portrait hanging position shown in this image.

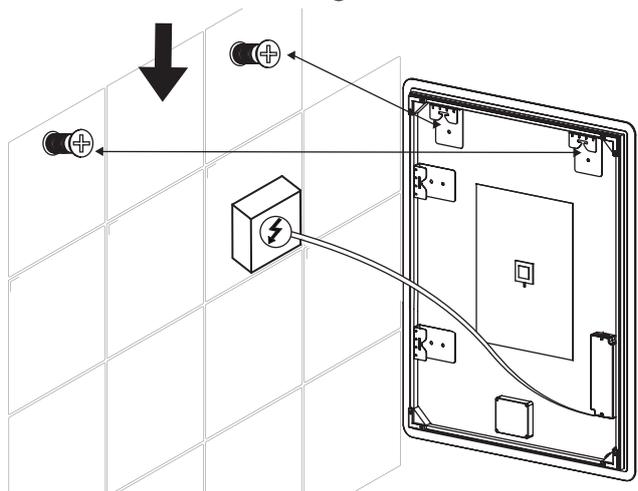


Important: The power supply box must be permanently connected to the fixed wiring of the mains supply using the supplied power cable and power supply box (not supplied). Hang the mirror onto the fixings, ensure it is safe and secure by moving it slightly to the left or right to secure in place.




INSTALLATION


NEWICK

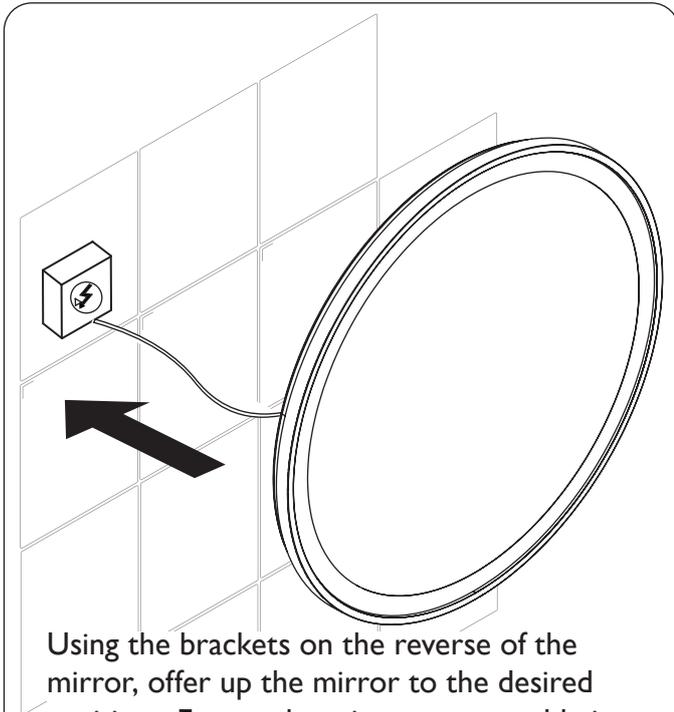


Using the brackets on the reverse of the mirror, offer up the mirror to the desired position. Ensure the mirror power cable is within reach of the connection to the power supply box (not supplied) from the electrical mains.

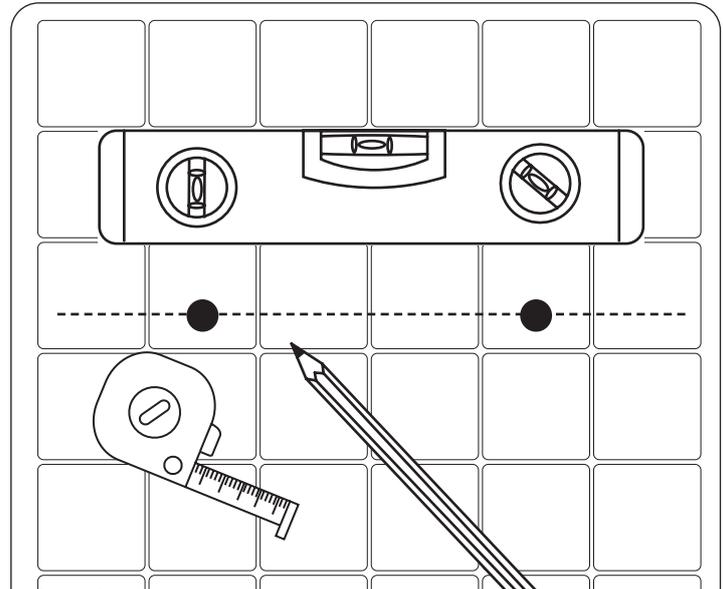

Carefully mark the fixing points using a tape measure, a pencil and spirit level, using the dimensions given on page 6 and the brackets on the reverse of the mirror as a guide. **Please ensure that all marked mounting points accurately match up with the fixing points on the mirror**

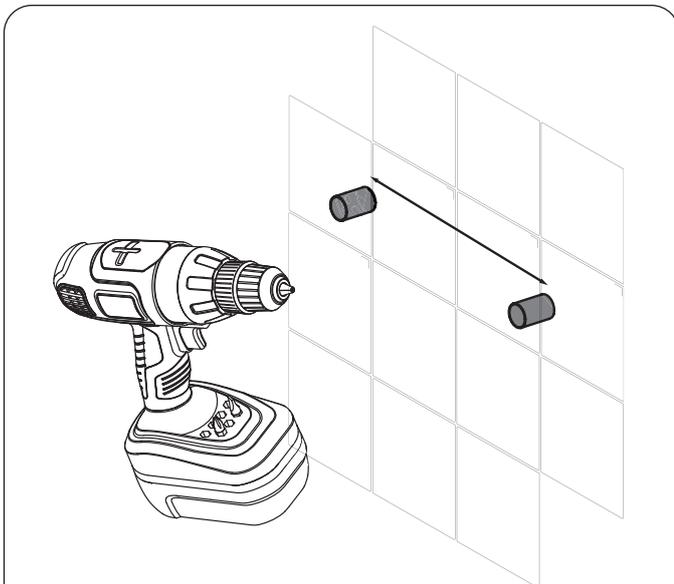

Using a suitable drill bit, drill holes in the marked positions to fit the wall plugs and screws provided. **If drilling through tile, use a ceramic drill bit. NB For plasterboard walls, specialist fixings should be purchased**

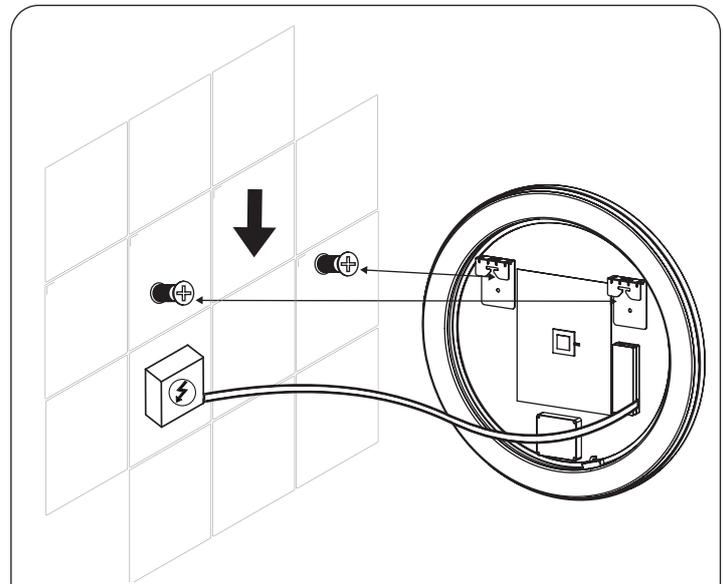


Important: The power supply box must be permanently connected to the fixed wiring of the mains supply using the supplied power cable and power supply box (not supplied). Hang the mirror onto the fixings, ensure it is safe and secure by moving it slightly to the left or right to secure in place.




INSTALLATION


AMBERLEY

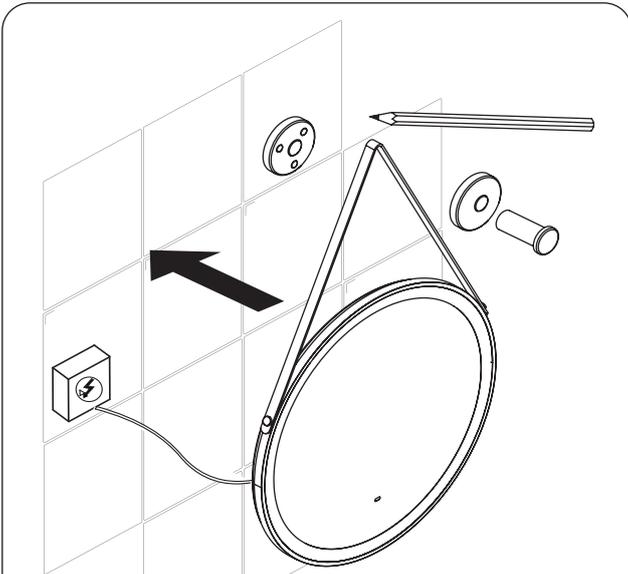


Fix the leather strap to the mirror, using the screws provided. Using the hanging hook and wall bracket, offer up to the desired position and carefully mark the holes using a pencil. Ensure the mirror power cable is within reach of the connection to the power supply box (not supplied) from the electrical mains.

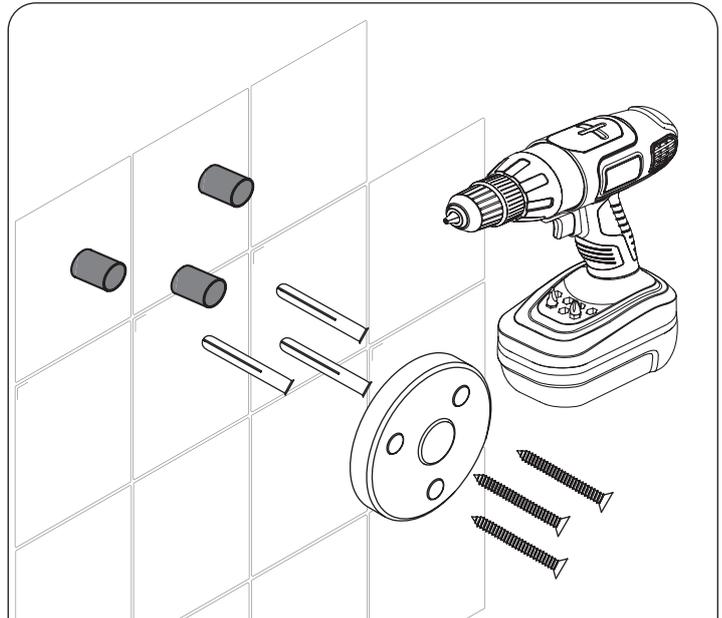

Using a suitable drill bit, drill holes in the marked positions to fit the wall plugs and screws provided. **If drilling through tile, use a ceramic drill bit. NB For plasterboard walls, specialist fixings should be purchased.** Screw the chrome wall bracket into place

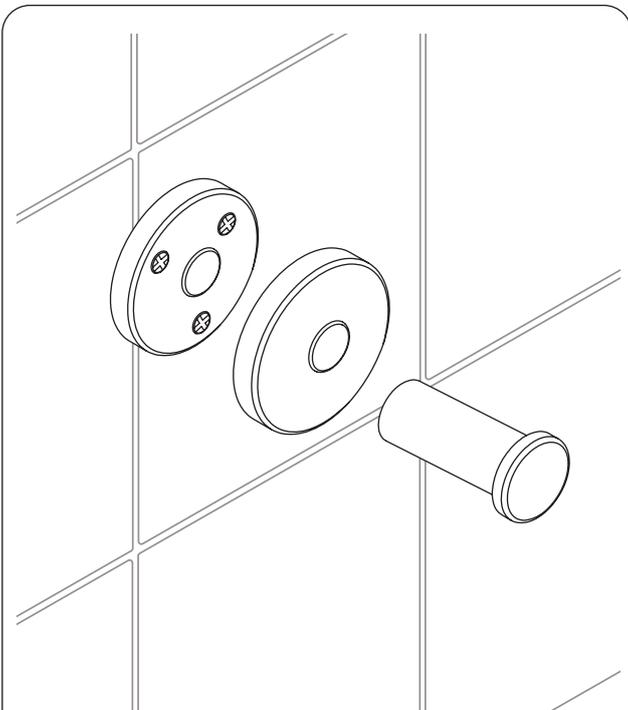

Place the black cover plate over the chrome wall bracket. Screw the peg onto the black cover plate. Your mirror is ready to hang.

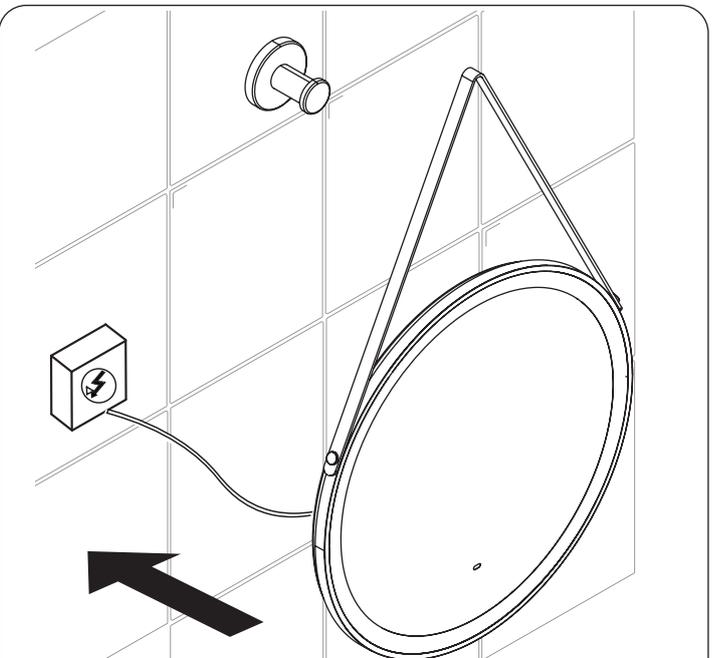


Important: The power supply box must be permanently connected to the fixed wiring of the mains supply using the supplied power cable. Hang the mirror onto the fixings and ensure it is safe and secure.



OPERATION


COLOUR TEMPERATURE CHANGE AND DIMMING

- To turn on, locate the sensor position on the mirror and wave hand in front of the sensor.
- To select the preferred colour, wave hand in front of the sensor to turn the light on. Repeat this action to select one of 3 colour variants, blue, cream or magnolia.
- To dim the light, hover your hand approx. 2cm in front of the sensor on the bottom of the mirror until desired brightness is achieved.
- Memory Function: The last working mode will be remembered after 8 seconds.

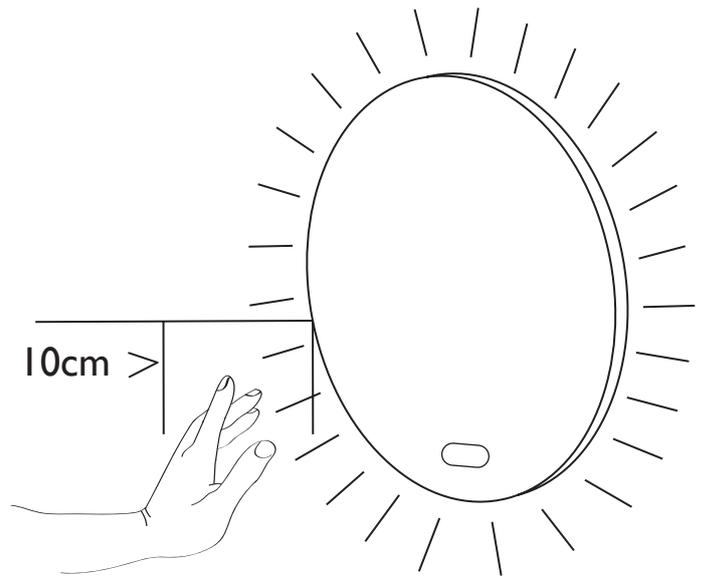

DEMISTER

- To activate the demister, locate the sensor on the mirror and wave your hand in front of it. The light will come on and the demister will automatically turn on.
- Wave your hand in front of the sensor to turn the light off and demister automatically turns off.
- Demister will switch off automatically after 30 minutes.

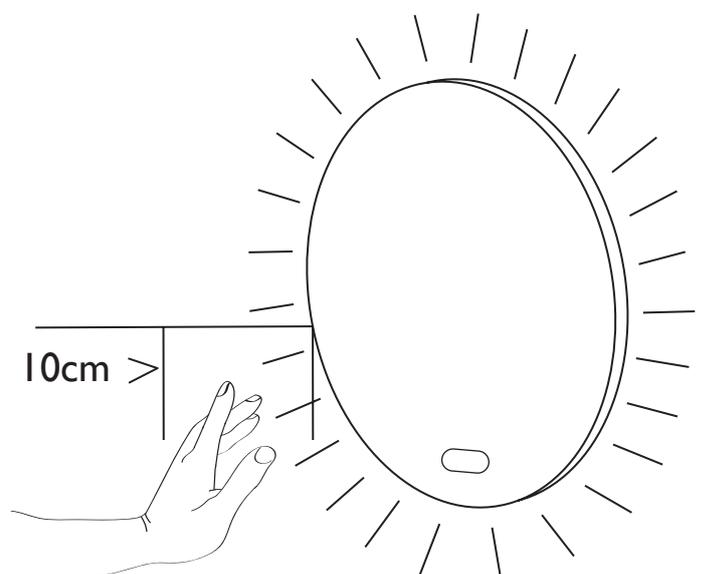

CARING FOR YOUR PRODUCT

Heritage products are made from premium materials, with hand polishing and electroplated finishes.

Your product should be regularly cleaned with a damp cloth and polished with a soft dry cloth.

Household bleaches and cleaners contain harsh chemicals and may damage the surface finish. Avoid using abrasive cloths, scouring pads, scrub sponges, steel wool or anything similar.

GUARANTEE

The confidence we have in the quality of our products and services enables us to offer a free peace-of-mind product guarantee from 2 years up to a lifetime guarantee against any manufacturing faults, with proof of purchase. In addition, our attentive customer service team are available to help solve any problems which may arise quickly and effectively so you can enjoy your bathroom.

To see the specific guarantee for this product, scan the QR Code or visit the following URL:

<https://www.heritagebathrooms.com/service-centre/guarantee>



NEED HELP?

In the unlikely event that you encounter a problem with your Heritage product, you must, in the first instance, contact the retailer you purchased it from. They will advise as to whether it is due to a manufacturing fault or an installation fault. If the problem is due to a manufacturing fault, they will contact us to arrange a supply of a replacement product as soon as possible. To speak to a Heritage customer service advisor, please contact our technical helpline on **0330 026 8503**.



DISPOSAL AND RECYCLING

End of Product Life

When this product has reached the end of its serviceable life, it should be disposed of in a safe manner, in accordance with current local authority recycling, or waste disposal policy.

The product should be disconnected in accordance with the national electrical regulations and uninstalled by a qualified person.



This symbol on the product or packaging indicates that this product should not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment.



The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment.

For more information about where you can drop off your waste equipment for recycling, please contact your local council office, your household waste disposal service or the shop where you purchased the product.



NOTES



HERITAGE[®]

BATHROOMS

We love to see how Heritage products are used so please keep in touch and share pictures of your new bathroom with us.



@heritagebathrooms

If you have any queries, our dedicated customer service teams and products experts are available to help.

Email us enquire@heritagebathrooms.com Call us 0330 026 8503 Website www.heritagebathrooms.com

UK: Heritage Bathrooms, Pooley Hall Drive, Birch Coppice Business Park, Dordon, Tamworth B78 1SG

EU: Masco Europe S.à.r.l., 14 Rue Strachen, 6933 Mensdorf, Luxembourg.