

IPS Evolve

concealed outlet urinal assembly

Pre-plumbed panel mounted urinal unit in variable panel widths and heights to suit customer requirements.

- Pre-plumbed unit
- IPS Evolve metal framework
- Aesthetic appearance
- Concealed fittings
- Easy clean

Typical NBS Specification N13 SANITARY APPLIANCES/ FITTINGS

N13/520 Pre-Plumbed Panel Lining System

Manufacturer and Reference: Armitage Venesta Washroom Systems, Chartwell Court, West Mill, Imperial Business Park, Gravesend, Kent, DA11 0DL.
Tel 01474 353333.

'IPS Evolve' high pressure laminate pre-plumbed washroom system.

Panel: 17mm thick V313 moisture resistant 700-720kg/m³ grade chipboard, faced on both sides with high pressure laminate creating an overall panel thickness of 19mm. Panels have either, postformed vertical edges with matching 1mm pvc to horizontal edges or all edges lipped with 3mm profiled pvc. Each panel section fitted to subframe with concealed BZP mild steel joggle clips, panel sections joined together with locating dowels.
Subframe: Rolled metal section subframe with chipboard bracing board, fitted to site frame with nylon click-fix location brackets.
Site Framing: Extruded aluminium base, headrail sections, rolled metal wall channels.

Flashgaps: 19mm thick melamine faced chipboard.
Pre-plumbing: Sanitary appliances pre-fixed and sealed to IPS Evolve unit, unless stated otherwise, all factory assembled by Armitage Venesta.
Colours: Refer to Armitage Venesta for standard laminate colour range.

N13/525 Urinal/Pre-Plumbed Panel

Panel System as clause 520: Sanitary appliances pre-fixed and sealed to IPS Evolve unit by Armitage Venesta unless stated elsewhere.


Urinal: Armitage Shanks S611001 Contour vitreous china urinal bowl.

Waste/Trap: Armitage Shanks S8850 40mm plastic domed waste, S8970 40mm plastic P trap with 75mm seal and multi-fit outlet.

Cistern/Flush Pipe(s) (complete with automatic syphon, lid and supports/fixings): Armitage Venesta S627067 one gallon auto cistern, pre-plumbed copper flush pipe.

Other Accessories: Armitage Shanks S6286 back inlet spreader, S9275 concealed steel hangers, S9276 toggle bolts.

Sealing: Joint between urinal bowl and panel sealed with white silicone sealant by

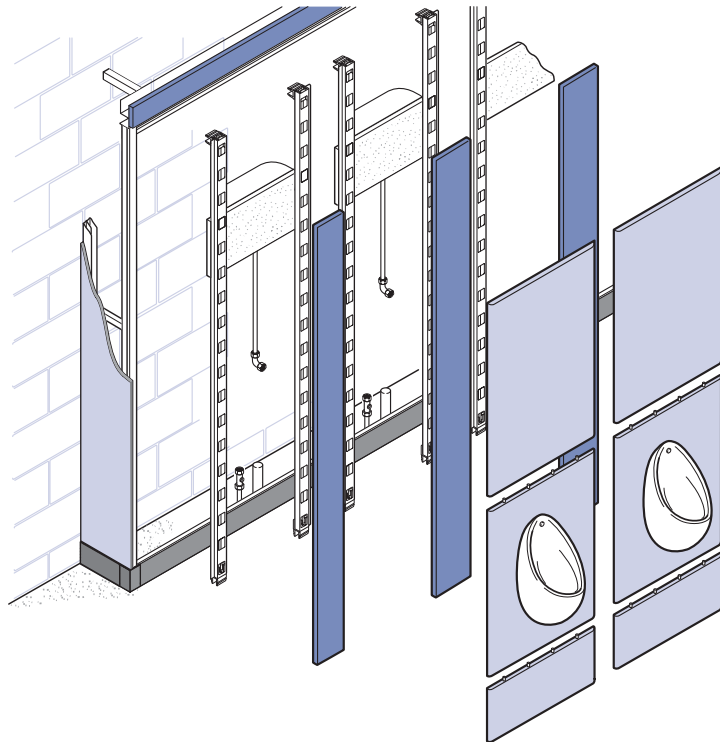

Armitage Venesta.
Note: Urinal division panels by Armitage Venesta. 19mm o/all thickness, high pressure laminate faced V313 moisture resistant chipboard core, with radiused top and bottom external corners. Vitreous china divisions are also available.

Alternative Panels

- 19mm o/a thickness Melamine Faced Chipboard (mfc) for dry and light use.
- 13mm o/a thickness Solid Grade Laminate for wet and heavy use.

