

# SHDDUAL09

## HARTLEBURY Shower Range


Hartlebury Exposed Thermostatic Dual Control Shower Valve with Premium Flexible Riser Kit Chrome



### Features:

- 5 Year Guarantee
- Supplied with 2 x 8 l/min. flow regulators
- Adjustable inlet centers mean you can use existing pipework with centers measuring anything between 136mm and 158mm
- Factory fitted regulators means this is a water saving shower
- Matching taps available

### Product Certifications:




### Additional Information:

### Specification

|  |  |
|--|--|
| Main Construction Material:              | Brass  |
| Number of Controls:                      | 2  |
| Shower Type:                             | Exposed Thermostatic Dual Control Shower Valve |
| Shower Head Type:                        | Premium Flexible Riser Kit                     |
| Valve/Cartridge Type:                    | Thermostatic Cartridge                         |
| Maximum Hot Water Supply Temperature °C: | 65   |
| Maximum Static Pressure: (bar)           | 10   |
| Plumbing System Suitability:             | Suitable for all plumbing conditions           |
| Working Pressure Range: (bar)            | Min. 0.2 Max. 5.0                              |
| Connection Inlet:                        | 1/2" BSP                                       |
| Connection Outlet~:                      | 1/2" BSP                                       |
| Isolation Valve Included:                | No   |
| Check Valve Included:                    | Yes  |

### Dimensions (measurements in mm)

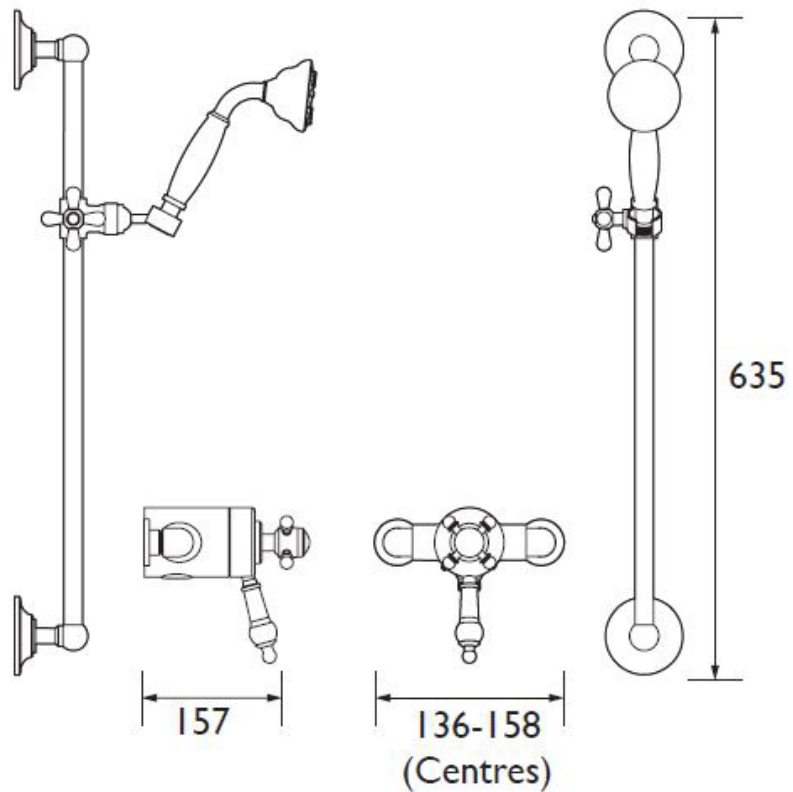

### Flow Rates (l/min)

| System Pressure (bar)   | 0.2  | 0.5  | 1    | 2     | 3     | 5     |
|-------------------------|------|------|------|-------|-------|-------|
| With Flow Regulators    | 6.08 | 13.5 | 13.6 | 14.9  | 15.1  | 15.4  |
| Without Flow Regulators | 10.5 | 18.6 | 27.3 | 38.61 | 47.29 | 61.05 |

# TECHNICAL DATA SHEET



# HERITAGE<sup>®</sup>

BATHROOMS

D4